


- Lumitec Maxillume LED Flood Lights should be installed by qualified persons only. Your Lumitec Maxillume LED Flood Light is fully sealed, and suitable for mounting in interior and exterior spaces. Light circuits should be protected with an appropriately sized fuse or circuit breaker. Fuses on circuits with multiple lights should be sized accordingly. Lights may get warm or hot to the touch during operation.
- Use the template below to drill the appropriately sized holes for the light body and mounting screws. Connect the wires on the light to the DC power system. Use standard SPST "on/off" switch. The black wire should be connected to (-) (or ground), and the white or red wire should be connected to +12VDC or + 24VDC supply using any standard SPST "on/off" switch and appropriately sized wire.
- Note that the light ramps in intensity over a period of about 3 seconds on startup. With no interruption of this ramp the light will achieve and maintain full intensity. To enable a "dimmed mode" simply interrupt the ramp in intensity with a brief off/on toggle of the power. This allows the intensity to be set anywhere from a soft glow to full power.

Lumens (White): 6,000  
 Voltage: 10-30vDC  
 12v DC Amps: 5.5A  
 24v DC Amps: 2.75A  
 Rated Watts: 60  
 CCT: 5000  
 CRI: 70+  
 Op. Temp F/C: -31/-35 to +131/55


### TEMPLATE FOR USE WITH FLUSH MOUNT MAXILLUME h60

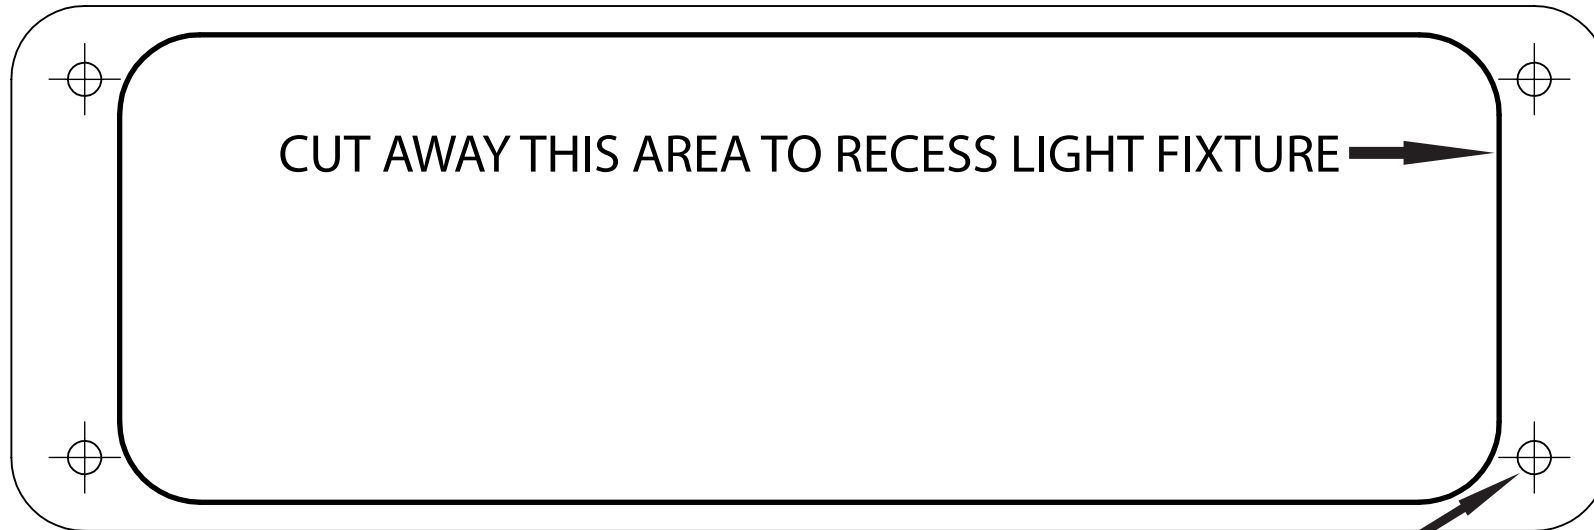

Predrill appropriately for all #6 self-tapping stainless screws

### TEMPLATE FOR USE WITH BRACKET MOUNT MAXILLUME h60

Use 1/4" stainless steel hardware of your choice.

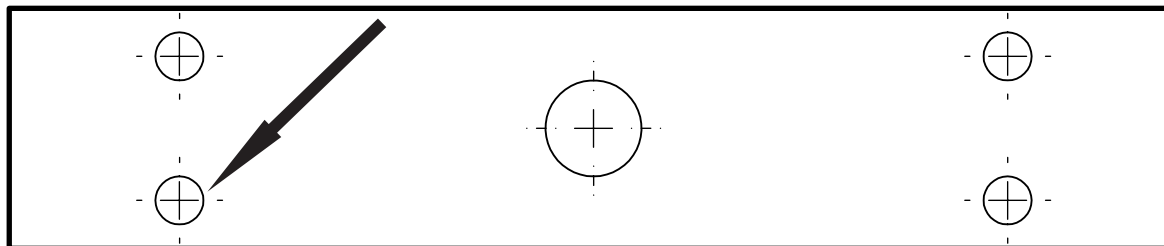

Center hole can be used for a 1/2" center bolt or wire exit hole.

