




# Art. 2034-2035-2035B-2036



INSIDE OUTSIDE LIGHT

Foresti & Suardi S.p.A.

LAMPADARE




- 2034**  
A: 200mm B: 265mm  
77W max
- 2035**  
A: 165mm B: 235mm  
60W max
- 2035B**  
A: 139mm B: 200mm  
52W max
- 2036**  
A: 130mm B: 175mm  
42W max

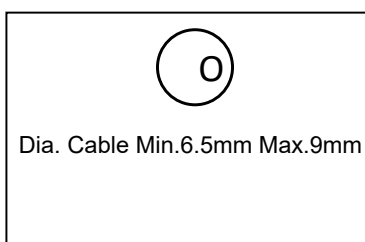

## INSTRUCTION SHEET

Ed:1 Rev.3 Lug.2016

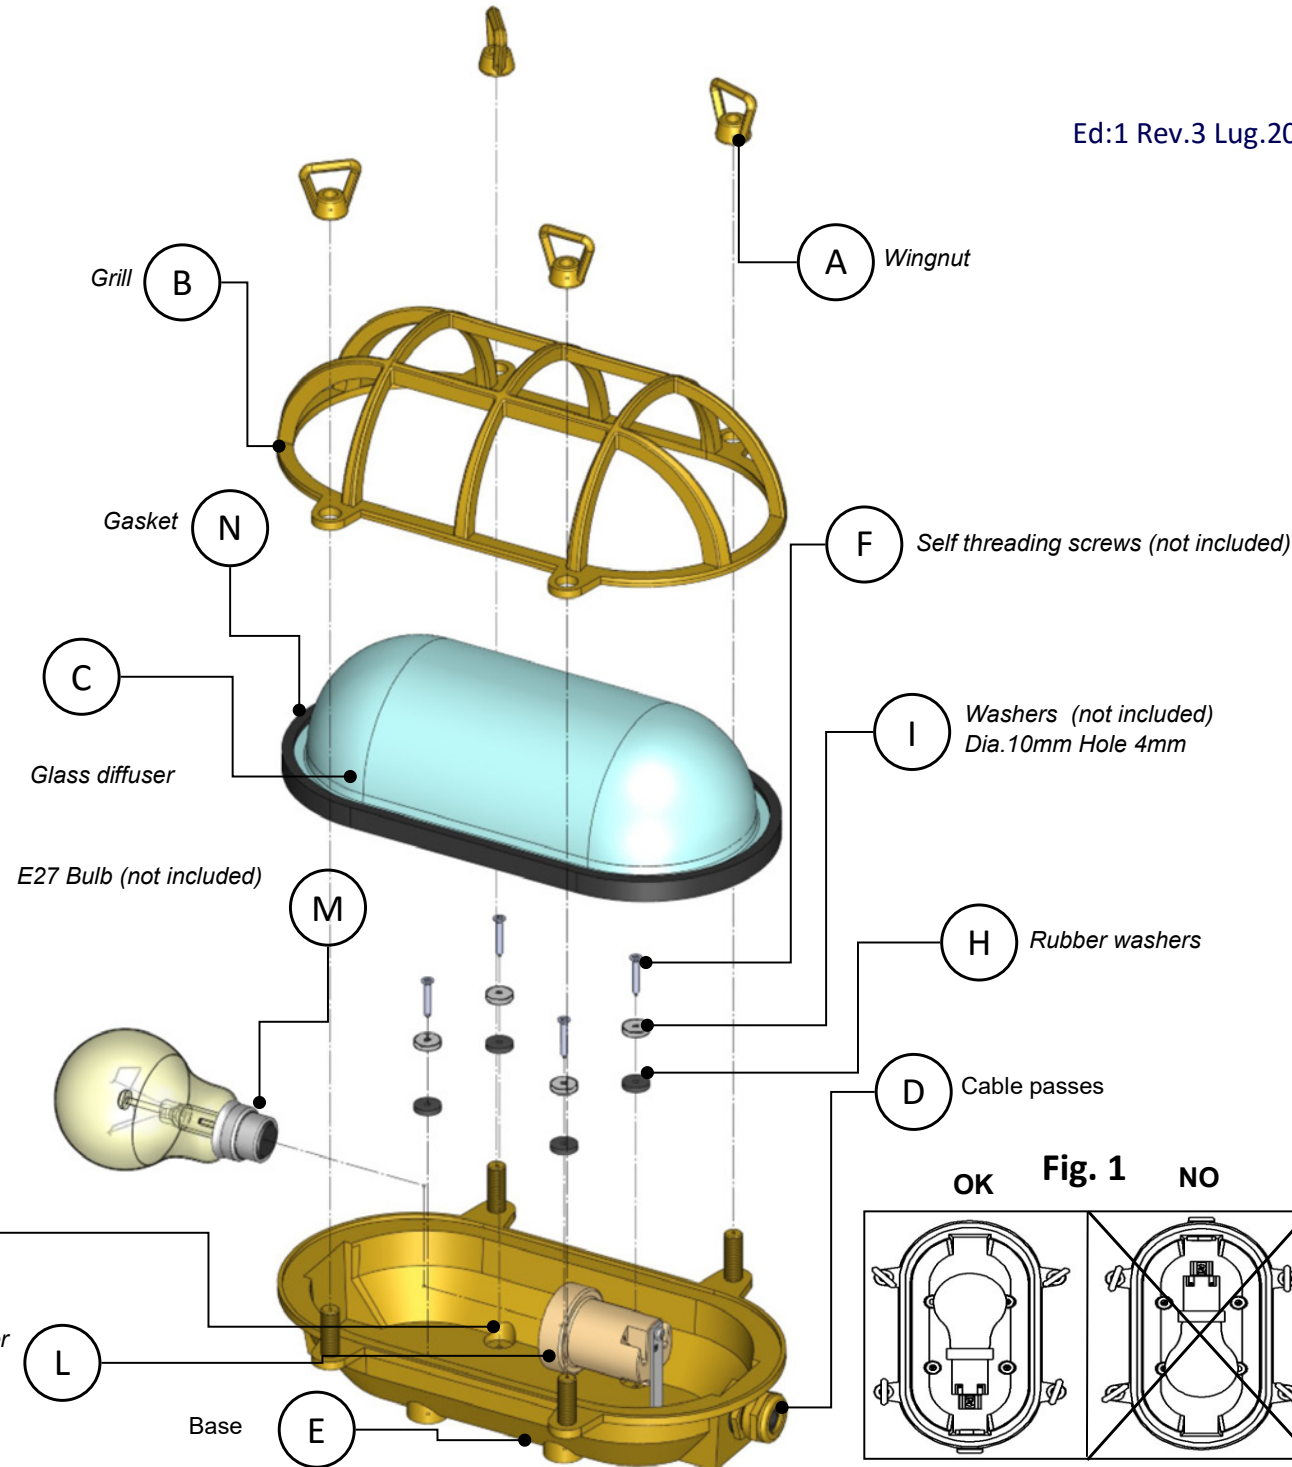

### ATTENTION

The installation of this product must be carried out by fully qualified personnel only, in accordance with the relevant laws. In order to prevent injury, it is important to comply with the health and safety requirements in the place of installation and also to observe the security information contained in this instruction sheet. This instruction sheet must be kept, and consulted, during the installation and servicing of this product.

- Ensure the power is switched off before installing or servicing the product.
- Do not exceed the manufacturer's recommended wattage.
- Do not tamper with the cables.
- Avoid excessive cabling inside the lamp. See photo 1.
- The light must only be used fully assembled and complete of all its components indicated in the installation instructions.
- Under no circumstances should the appliance be covered when it is switched on.
- Ensure that the application area is suitable and conforms with safety standard regulations.
- Where the luminaire is wall-mounted, always install the lampholder at the bottom Fig.1

### Instructions for proper installation:

1. Unscrew the wingnuts (A), remove the grill (B) and glass (C).
2. Insert the cable through the hole (D) (See point O)
3. Fix the base (E) onto the surface using self tapping screws (F) (screws not included) into the appropriate holes (G). The rubber washers (H) supplied with the product should be placed between the fixing screws and the base, for a correct sealing between the screw and the rubber washer insert a metal washer (I) Dia.10mm 4mm hole.
4. Insert the certified sleeves heat resistant on the wires before connecting the bulb holder (L). Make sure that the sleeves cover entirely the wires. It may be necessary to shorten the insulating sleeve to the appropriate length, i.e. distance between the bulbholder (L) and cable grommet (D). See photo 1
5. Connect the power supply wires to the bulb holder(L) taking care that copper strands do not come out from the clamp. Pay attention when connecting the product. The earth wire (yellow/green) must be connected to the terminal marked with the following sign.
6. Tighten the grommet (D) until the cable is watertight.
7. Insert a E27 bulb (M) of the correct voltage and wattage into the bulb holder (L) (Bulb not included).
8. Reassemble in the right order, firstly the glass (C) with its seal (N), secure the grill (B) through the wingnuts (A) and lasten until seal makes perfect.

**The image of the product is for illustration purposes only and may not represent the actual item.**



This equipment may not be treated as household waste. Instead it shall be handed over to the applicable collection point for the recycling of electrical and electronic equipment.

By ensuring this product is disposed of correctly, you will help prevent potential negative consequences for the environment and human health, which could otherwise be caused by inappropriate waste handling of this product. For more detailed information about recycling of this product, please contact your local city office, your household waste disposal or the dealer where you purchased this product.

