


Maxillume2 - LED Flood Light

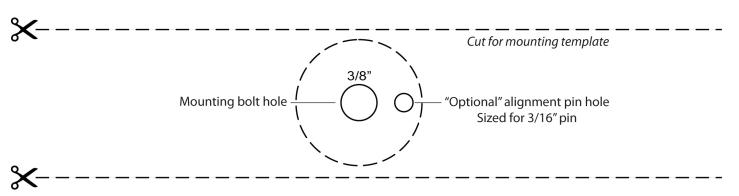

Note:

Lumitec MaxIllume LED Flood Light should be installed by qualified persons only.

Your Lumitec MaxIllume LED Flood Light is fully sealed, and suitable for mounting in interior and exterior spaces. However they are not designed to be permanently mounted underwater.

Light circuits should be protected with an appropriately sized fuse or circuit breaker. Each light draws approximately 2.95A @ 12VDC / 1.38A @ 24VDC. Fuses on circuits with multiple lights should be sized accordingly. Lights may get warm or hot to the touch during operation. This is normal and will not cause damage to typical mounting surfaces, including fiberglass and wood and fabrics. The lights should NOT be mounted on highly flammable substrates or mounting surfaces which are particularly sensitive to high temperatures.

Mounting:

Use the template below to drill the appropriately sized holes for the light body and mounting screws. Drill mounting bolt hole slightly larger for 3/8" mounting bolt.

"Optional" Drill for rotational alignment pin use. If rotational alignment is not desired, skip this step.

"Optional" Use suggested wire exit hole location unless wire placement is desired elsewhere.

Connect the wires on the light to the vessel's DC power system. Device is polarity sensitive. The black wire should be connected to the vessel's (-) (or ground), and the white or red wire should be connected to the vessel's +12VDC or +24VDC supply.