## **QUICK INSTALLATION GUIDE**



## PGR35B

FEATURING ZERO STANDBY CURRENT DRAIN

### **USER MANUAL** QUICK INSTALLATION GUIDE

PGR35B BLUETOOTH® GAUGE HOLE RADIO

## 🥑 Planet Ludio

iPod<sup>®</sup> and iPhone<sup>®</sup> are registered trademarks of Apple Inc. registered in the USA and other countries. Planet Audio is not affiliated with Apple Inc.


#### Thank you for purchasing this



PGR35B Bluetooth Gauge Hole Radio Please read thorough these instructions carefully so you will know how to operate your model properly. After you have finished reading the instructions, keep this document in a safe place

for future reference.

#### THIS PACKAGE CONTAINS



Metal Bracket Hexagon Mounting Studs M4 Secure Nuts (1pc) (2ncs) (8ncs)



#### Bluetooth

(1pc)

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG. Inc. and any use of such marks is under license. Other trademarks and trade names are those of their respective owners.

#### FCC COMPLIANCE STATEMENT

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of this device.

This transmitter must not be co-located or operated in conjunction with any other antenna or transmitter. The Bluetooth antenna cannot be removed (or replaced) by user. This equipment complies with FCC/ IC radiation exposure limits set forth for an uncontrolled environment and meets the FCC radio frequency (RF) Exposure Guidelines and RSS-102 of the IC radio frequency (RF) Exposure rules. This equipment has very low levels of RF energy that it deemed to comply without maximum permissive exposure evaluation (MPE). But it is desirable that it should be installed and operated keeping the radiator at least 20 cm or more away from person's body (excluding extremities: hands, wrists, feet and ankles). Alteration or modifications carried out without appropriate authorization may invalidate the user's right to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

#### Relocate or reorient the receiving antenna.

Increase the separation between the equipment and receiver. Connect the equipment into an outlet on a circuit different from that to which the receiver is connected Consult the dealer or an experienced radio/TV technician for help.

#### **!! WARNING !!** ADJUSTMENT OR ALTERATIONS OF THIS DEVICE MAY RESULT IN HAZARDOUS RADIATION EXPOSURE.

**BEFORE YOU START** 


#### INSTALLATION PRECAUTIONS

#### Always consult with a professional installer

 Do not attempt to install or service this product by yourself. Installation or servicing of this product by persons without professional training and experience in electronic equipment and motorized vehicle accessories may be dangerous and could expose you to the risk of electric shock, injury or other hazards

 Refer any repairs to a qualified PLANET AUDIO Service Center • The PGR35B should be wired directly to a vehicles battery When wiring directly to the vehicles battery, be sure to disconnect the batteries negative terminal wire before starting any wiring procedures, if extending the main power primary wire, it is suggested that an optional fuse and fuse holder (not included) with minimum rating of 20 Amperes be in-line with the positive battery terminal

 The ground cable length should be as short as possible, if extending from you battery, be sure to use a proper gauge rating for the length of the run, use only high quality copper primary type wire . The PGR35B has a IPX6 weather resistant design, it should not be submerged in or under water under any circumstances Do not use abrasive cleaning materials on the lens or bezel Use only the installation parts provided with the PGR35B

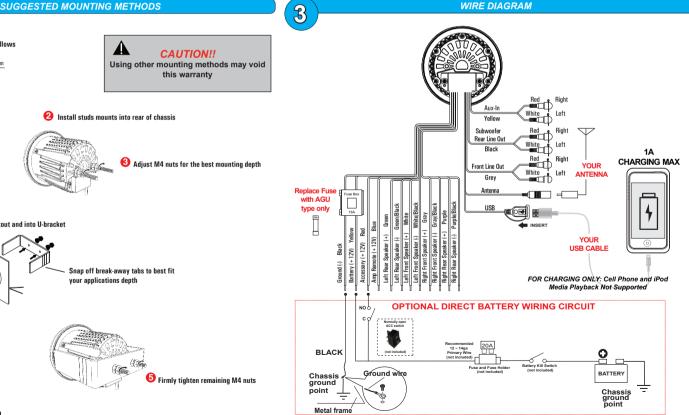



IMPORTANT SAFETY PRECAUTIONS

BE SURE TO OBSERVE THE FOLLOWING GUIDELINES:

• Do not turn up the volume so high that you can't hear what's

Do not operate mobile video equipment while driving a motorized

• Set your volume control at a low setting, then slowly increase the

In the event you should notice smoke, strange noises or odor from

this product, or any other abnormal signs, immediately turn off the

PLANET AUDIO Service Center Using this product in this condition

power and consult your dealer or the nearest authorized

Ø 3.00" / 76mm

Slip the unit through the hole cutout and into U-bracket

may result in permanent damage to the system.

Make the mounting hole size as follows

sound until you can hear it comfortably without distortion. or ear

vehicle - safe driving and safety consideration of others should

Use caution or temporarily discontinue use in potentially

around vou.

discomfort

2

hazardous situations.

always be your highest priority.



A







tant to insulate any unused wires, which if left uncovered may cause a short circuit. When connecting other devices to this product, refer to the manual for the product to be connected. The black cable is ground. make sure to connect the ground wire first.

Ensure that the ground cable is properly connected to metal parts of the vehicles body frame or direct to the battery if your vehicle does not have a grounded chassis frame. The ground cable of this units power amp and a second powered system must be connected to the frame separately with different screws. If the screw for the ground wire loosens or falls out, it could result in fire or malfunction.

# \*0


To avoid potential shorts in the electrical system, be sure to disconnect the (-) battery cable before installation. Use this unit with a 12-Volt battery and negative grounding only. Failure to do so may result in a fire or malfunction.



When replacing the fuse, be sure to only use a fuse of the rating specified on this product. To avoid short-circuiting, cover any disconnected leads with insulating tape. It is specially impor-

#### **TROUBLE SHOOTING GUIDE**

TROUBLE	CAUSE	SOLUTION
	The fuse is blown	Check / replace the fuse
Unit will not turn on	Ignition not engaged	Turn ignition to on position
	Blown speaker	Replace faulty speaker
	Volume is low / muted	Press the volume level up
No sound is heard	Device is paused or muted	Check your devices playing / volume status
	The Bluetooth function of the device is not enabled	Refer to the user manual of the device for how to enable the Bluetooth function
Cannot pair Bluetooth	The PGR35B BT memory is full	Follow how to reconnect a device in section E
The audio quality is poor after connection with a Bluetooth enabled device	The Bluetooth reception is poor	Move the device closer to the audio system or remove any obstacle between the device and the systems antenna
	Power glitch or interference	Disconnect power for 10 seconds to reset
Unit has become	Low battery power	Charge battery, run the engine to recharge the battery
unresponsive	Reset the main system	Follow steps in section B



#### SPECIFICATIONS MOSEET

#### FM TUNER FREQUENCY RANGE

- USA 87.5~107.9MHz
- Europe 87.5~108MHz
- Asia 87.5~108MHz
- Australia 87 5~108MHz
- Usable Sensitivity: 12dB (S/N=30dB)
- Bands: 2

#### AM TUNER FREQUENCY RANGE

- USA 530~1710KHz
- Europe 522~1620KHz
- Asia 522~1620KHz
- Australia 522~1620KHz
- Usable Sensitivity: 40dB (S/N=20dB)
- Bands: 1

#### VEATHER BAND SELECTION • CH 1 162 400MH

- CH.2 162.425MHz
- CH.3 162.450MHz
- CH.4 162.475MHz
- CH.5 162.500MHz
- CH.6 162.525MHz
- CH.7 162.550MHz
- Bands: 1

#### BLUETOOTH

#### • BT: 3.0

- BT Range: 33Ft / 10M (Class 2)
- BT Profiles: A2DP / AVRCP 1.3

#### ISB DRIVE MEDIA SUPPORTED

- MP3
- WMA
- 65,000 Songs
- 32GB / FAT 32
- USB 2.0 High Speed
- USB Output Voltage: 5VDC @ 1A

Specifications subject to change without notice

#### Channels: 4 Class: AB

 RMS Total Power Output: 80W Frequency Response: 20-20kHz

MAX Continuous Output: 240W

• PEAK Power Rating: 60W / channel

INTEGRATED AMPLIFIER

(All channels driven)

40 stable

#### CHASSIS

- Button Backlight Illumination: BLUE LED
- F/R/S RCA Preamp Output: 2VRMS
- RCA Input Impedance: 10kΩ
- LCD: TN Type / Active Matrix


#### GENERAL

- Power Source: 14.4VDC
- (10.8V ~ 16V allowable)
- Grounding System: Negative type
- Maximum Current Consumption: 15A
- 3-way protection circuitry (thermal,
- overload, and speaker short protection
- Unit Weight: 1.08lbs / 0.52kg
- Storage Temperature:
- -22°F to 176°F / -30°C to 80°C
- **Operation Temperature:**
- -4°F to 158°F / -20°C to 70°C
- Replacement Fuse: 15A

(Replace with ATG Fuse Type Only)

QUICK START GUIDE

## 

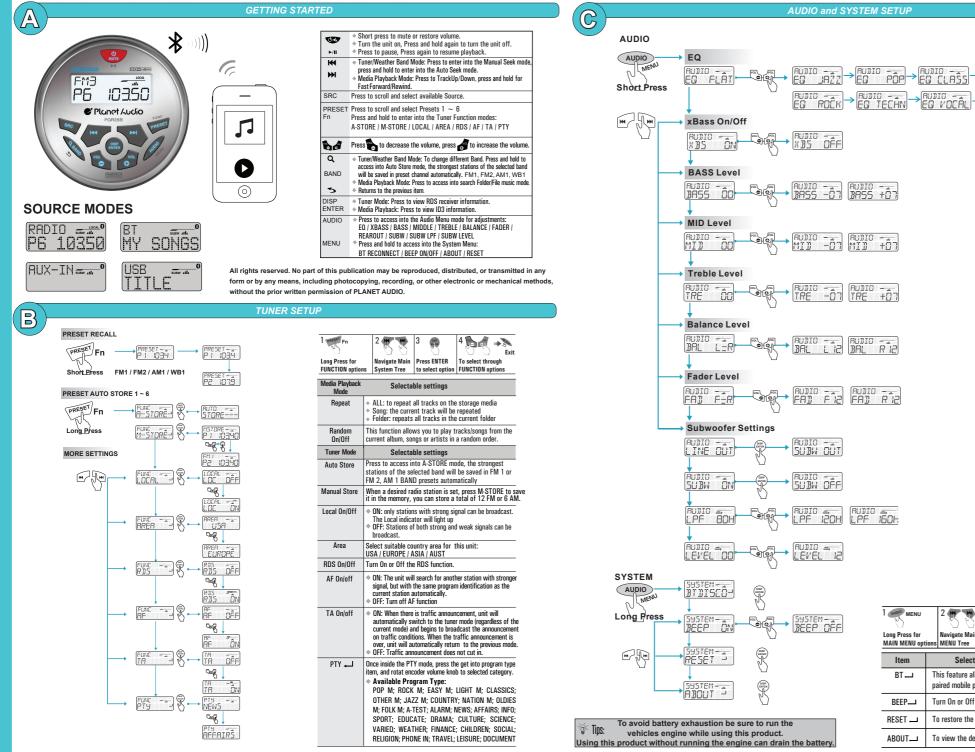



R

EQ CLASS

HI HI

Navigate Main Press ENTER

Selectable settings

To restore the factory defult settings.

MAIN MENU options MENU Tree to select option MENU options

Turn On or Off beep sound.

5

This feature allows to Reconnect or Disconnect to the

paired mobile phone or Bluetooth device manually.

To view the device hardward and software versions.

AUDIO MENU

Long Press for

Item

BT 🖵

BEEP\_

RESET 📖

ABOUT.

D














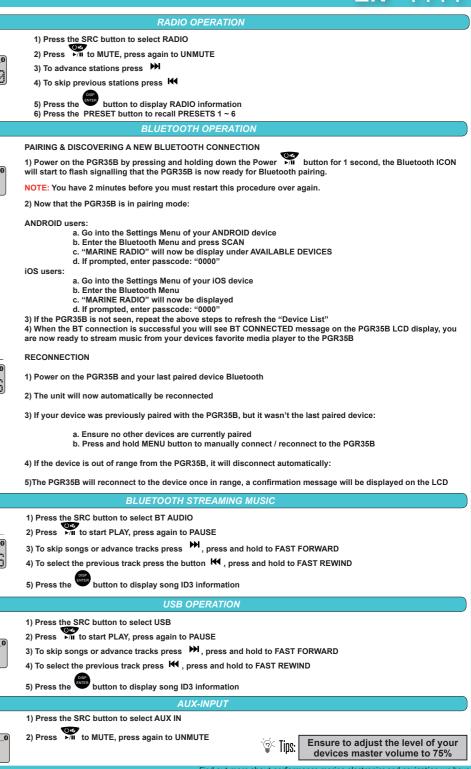

Find out more about performance marine electronics and navigation we have.

EN