


580mA @ 12VDC  
320mA @ 24VDC


PRINT TO SCALE!

## General Area Illumination<sup>2</sup> Light

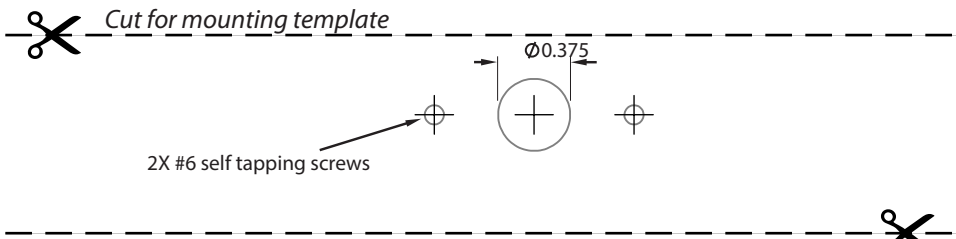

2X #6 self tapping screws

Step 1:  
Attach mounting  
bracket to wall using  
#6 screws (supplied).



Step 2: Connect the wires. Circuit  
must be properly fused.

Step 3:  
Position the fixture on the mounting  
bracket. Note the 4 tabs on the inside  
of the fixture must drop into openings  
in mounting plate.

Step 4:  
While pushing fixture against mounting  
bracket, turn fixture clockwise until rigid  
resistance is encountered. Continue to turn  
past rigid resistance, and fixture will snap  
into place. Verify that the light is properly  
installed by rotating it counter clockwise  
about 1 full turn until the anti-rotation  
stop is encountered. The light should  
remain firmly installed. The anti-rotation  
stop will allow almost full rotation of  
the light, but will prevent the power  
wires from becoming twisted.

### Operation:

Light may be controlled by any SPST (eg toggle or rocker) switch.

### For 4-color operation:

Your light offers 4 colors of light output to suit any mood. To change colors, simply turn the lights off, and then immediately back on. Repeat this process to cycle through all available colors.

The light will 'reset' after being off or approximately 2 seconds. This ensures that the White light illuminates when the light is again turned on.

Multiple lights may be installed on the same switch circuit. In the unlikely event that lights become 'out of sync' (eg lights illuminating different colors) simply reset the lights by turning off for 3 seconds.

### For 2-color dimmed lights:

The high-output white light is dimmable to reduce power consumption and create a softer look.

To dim the white light: Note the slow ramp of the light intensity when the white light is illuminated. When the light reaches the desired intensity, turn the light off, then immediately back on. This will hold the light at the desired intensity.

To change colors, simply turn the lights off, and then immediately back on after the dimming stage is complete.

Note that the light will 'reset' after being off or approximately 2 seconds. This ensures that the white light illuminates when the light is again turned on.

Light circuits should be protected with an appropriately sized fuse. Each light draws approximately 580mA at 12VDC and 320mA at 24VDC. Fuses on circuits with multiple lights should be sized accordingly.