



# Sea-Dog Line 6-Breaker Vertical Panel #424800-1 & #424806-1 Installation Instructions




12 VOLT  
10 Amps Maximum Per Circuit  
37 Amps Maximum Per Panel  
6 ILLUMINATING SWITCHES  
O.D.: 6-1/2" x 4-1/2"

1. Connect the red wire marked "+" to the positive side of the battery.
2. Connect the black wire marked "-" to the negative side of the battery.
3. Connect the positive wire of each individual circuit to the #2 spade on the corresponding toggle switch on the panel. Connect the remaining wire or negative wire of each circuit to the common ground of the boat, if so equipped, or directly to the negative terminal of the battery or the negative wire of the panel.
4. Each panel comes prewired with 6 individual circuit breakers. If desired, the breakers can be easily removed and switched with other breakers on the panel to raise or lower the amp rating of the individual circuits (do not exceed maximum of 10 amps per circuit, and maximum of 37 amps per panel). Additional breakers can also be ordered from your local marine supplier.
5. Included with each panel are 20 stick-on labels to allow customizing the circuit descriptions to meet your requirements.

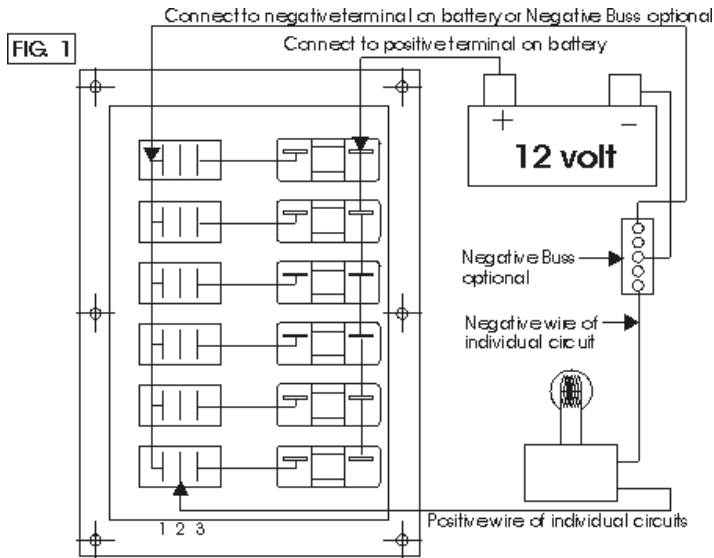

A - 6-1/2"  
B - 4-1/2"



C - 5-1/2"  
D - 3-1/2"