

STAINLESS STEEL


FLUSH FUEL TANK VENTS




NEW THREADED FLUSH FUEL VENT

COMPATIBLE WITH ATTWOOD P-TRAP
AND INTEGRATED SURGE/P-TRAP
ALLOWING FOR THE FIRST TIME,
A FLUSH FIT OUTSIDE THE HULL

ATTWOOD 316 STAINLESS - PROVEN
CORROSION RESISTANCE



New!
Flush Vent



Standard
Vent

STAINLESS STEEL

FLUSH FUEL TANK VENTS




Attwood is proud to introduce a new addition to our line of Stainless Steel Flush Fuel Tank Vents. This new version can be threaded into our P-Traps and Surge Protectors allowing for the first time a flush fit on the outside of the hull.

FEATURES AND SPECIFICATIONS

- Integral Allen socket to facilitate installation
- Meets ABYC minimum venting area requirements
- Torturous path design to minimize water ingestion
- Serviceable debris screen
- 1/16" - 1/4" hull thickness range with included washer.
- Spacers available for hull thicknesses up to 3/4"
- Includes silicon seals

P-TRAP FUEL SURGE PROTECTOR

Eliminates the need to install a fuel line vent and a surge protector — now, one product helps avoid spills, provides fuel tank venting, and resists water intrusion into the fuel system.




Surge Protection

Inertia of surging fuel drives the surge ball up against the upper seat, closing the large vent opening. Passage is limited to the smaller openings, which reduces fuel flow and minimizes spillage. When the vent line becomes full it helps the automatic fuel nozzle to shut off.

Venting

Without fuel inertia, the surge ball remains at rest, allowing unrestricted venting through all openings.



Water Intrusion Protection

Baffles resist water from entering vent line and fuel tank during normal sea conditions and washdowns.



1684
Flush Mount




1680
Standard Mount

Description	Vent Head	Max Hull Thickness	Bulk Packaging	Aftermarket Packaging
Flush Mount — 5/8" I.D. Hose				
Flush Vent	Stainless Steel	1/4"	1684-1	1684-6
Spacer	For 1674/1684	1/4" - 1/2"	911507	—
		1/2" - 3/4"	911508	—
Standard Mount — 5/8" I.D. Hose				
Standard Vent	Black Plastic	9/16"	1680-1	—
	White Plastic	9/16"	1682-1	—

* Blister Card

90° P-TRAP FUEL TANK VENTS

These vents help prevent water from entering the fuel tank, yet allow air to vent freely, during normal sea conditions and washdowns. This eliminates the need for an anti-siphon loop in the vent hose.

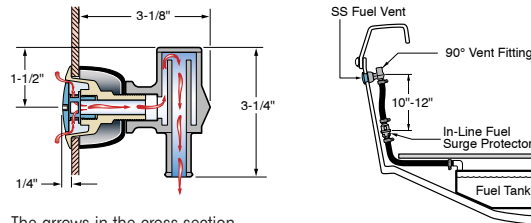

The arrows in the cross section show the baffled route that water would have to travel in order to reach the fuel vent hose.



1674
Flush Mount

1670
Standard
Mount

1675
Surge Protector

Description	Vent Head	Max Hull Thickness	Bulk Packaging	Aftermarket Packaging
Flush Mount — 5/8" I.D. Hose				
Flush Vent	Stainless Steel	9/16"	1674-1	1674-6
Spacer	For 1674/1684	1/4" - 1/2"	911507	—
		1/2" - 3/4"	911508	—
Standard Mount — 5/8" I.D. Hose				
Standard Vent	Black Plastic	9/16"	1670-1	1670-3
	White Plastic	9/16"	1671-1	—
	SS Trim Cover	9/16"	66419-1	—
Gasket			911347	—
Surge Protector — 5/8" I.D. Hose				
Surge Protector, Black Plastic			1675-1	—

* -3 = Skin Pack, -6 = Blister Card