

CLIPPER

BM-1 and BM-2 Cables supplied

Shunt link to M8 Ring terminal.

5 Metre from display unit to battery - fused and fitted with ring terminals for shunt, fuse holder and M8 ring terminal to battery.

Display unit


Standard 110mm square Clipper case

High contrast LCD, backlit for night viewing

Minimum voltage visual alarm

Simple operation - 4 keys to select backlight, Volt/Amp/State of Charge screen, AMP hours or Time to run

BM-2 Battery Monitor

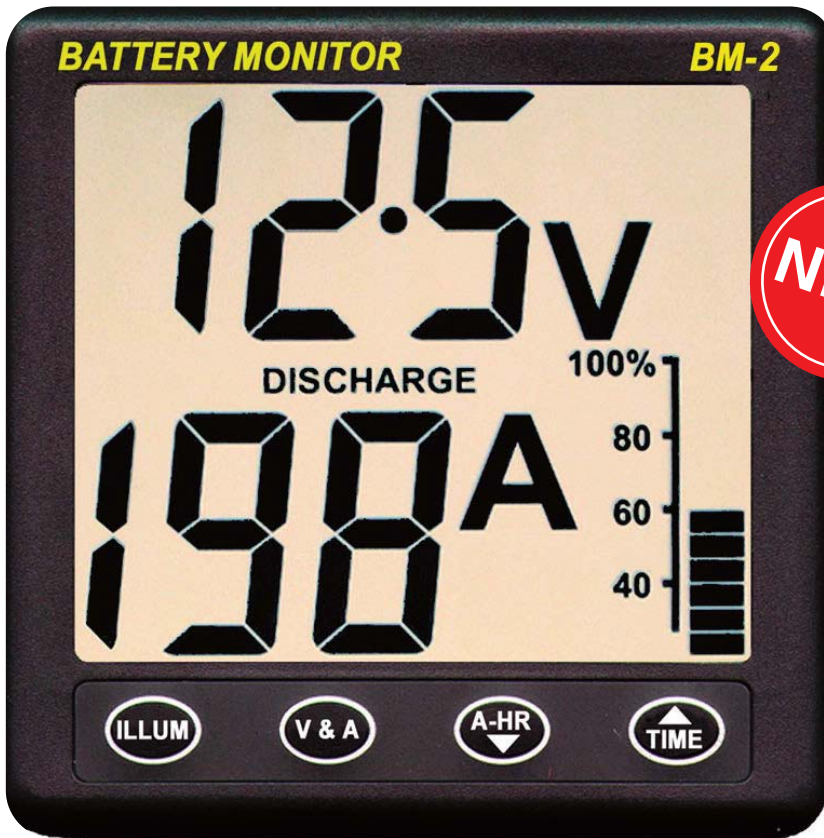

ACTUAL SIZE

BM-2 Battery Monitor

200 AMP SHUNT



Specifications

Supply voltage	8 - 16 Volts DC
Supply current	1.5 milliamps
Battery capacities	0 - 999 AMP Hour
Load current	199 AMPS Maximum
Charge current	199 AMPS Maximum
Shunt	Standard 50 millivolt @ 200 AMP