

# 30" RING BUOY

## DX0340D Bridgebuoy®

DX0340D

### TYPE

Type IV U.S.C.G., global approval for 30" Ring Buoy

### USES


The only "Bridgebuoy®", it is used onboard commercial vessels, offshore installations and larger yachts. All Datrex rings are molded from high impact linear low-density polyethylene for superior life expectancy in the most severe environments. These 4kg Life Buoy Rings are suitable for commercial shipping applications only, and are designed to be used in conjunction with SOLAS MOB Smoke & Light Markers fitted onto the sides of commercial ships. The extra weight ensures that the MOB Smoke & Light Marker is pulled from its bracket once the lifebuoy is released over the side of the vessel. Fully SOLAS / Ships Wheel approved and fitted as standard with 8 x SOLAS Retro Reflective tapes and lifebuoy grab lines.

### FEATURES

All Datrex rings are molded from high impact linear low-density polyethylene for superior life expectancy in the most severe environments. The encircling black, floating rope is replaceable.

### SPECIFICATIONS

ITEM NO.	DX0340D
<b>USE</b>	Marine safety
<b>SIZE</b>	30" (76 cm)
<b>WEIGHT</b>	Min. weight 4 kg
<b>CLOSED CELL FOAM</b>	Yes
<b>MOLD RESISTANT</b>	Yes
<b>RETRO-REFLECTIVE</b>	Yes
<b>COLOR</b>	International Orange
<b>QUANTITY PER CASE</b>	3 per case
<b>CASE DIMENSIONS</b>	31 x 31 x 13 inches (63.5 x 63.5 x 25.4 cm)
<b>CASE WEIGHT</b>	34 lbs (15.4 kg)
<b>QUANTITY PER PALLET</b>	27 liferings
<b>PALLET DIMENSIONS</b>	43 x 48 x 65 inches (102 x 122 x 140 cm)
<b>PALLET WEIGHT</b>	306 lbs (139 kg)
<b>PALLET VOLUME</b>	78 ft³ (2.20 m³)

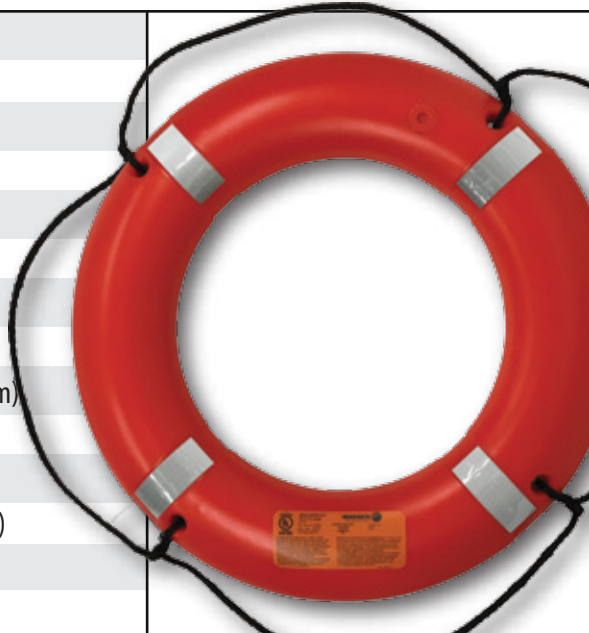

### APPROVAL/COMPLIANCE

Approved globally with USCG, Canadian Coast Guard and BV/MED approved.

U.S.C.G. Approval No: 160.050/128/0, U.S.C.G. SOLAS 160.150/5/0



---DATREX---