FI50DSW - Depth, Speed & Wind Package

FI5001

000-010-511
30m Cable kit w/ J-box
(included)

Use J-box if installation requires cutting cable

000-166-945
6m NMEA2000 Drop Cable
(supplied w/ each display)

Drop Connector

Connect to any of the 6 drop connection ports inside the FI5002. Match the cable wire colors to the colors shown on the drop connector.

FI501

FI503

000-166-944
2m Power Cable
Supplied w/FI5002

FI5002

DST-800PSF
w/ 6m cable attached

Set both Terminator Resistor jumpers to ON in the FI5002.

ON: ○ ▭ ○ ○ **ON:** ○ ▭ ○ ○

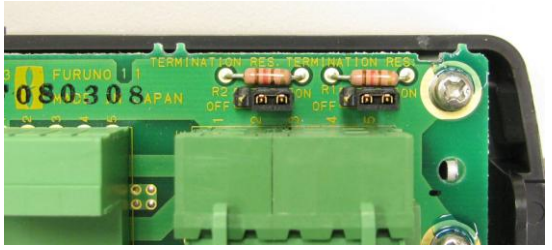

Check out the collection of marine electronics & navigation we offer.