

FURUNO

MARINE VHF RADIOTELEPHONE

Model **FM-4800**

The Ultimate 5-in-1 Tool of VHF Radios

GPS, AIS, Loud Hailer, NMEA2000 and DSC calling, all-in-one



Handset (optional)



- ▶ Built-in 72 Channels GPS
- ▶ Built-in AIS receiver
- ▶ 25 W/1 W output power
- ▶ Class D DSC
- ▶ Loud Hailer/Fog Horn
- ▶ NMEA2000 and NMEA0183 networking
- ▶ Dual Station with optional handset
- ▶ ATIS mode for inland waterway
- ▶ 10 weather channels
- ▶ Fully waterproof (IP67)



Everything needed for Hailing and Calling in one unit

◆ Built-in GPS

Built-in Hi-Sensitivity 72 channels GPS with internal antenna which eliminates external GPS antenna and its wiring requirements.

◆ Built-in AIS receiver

When connected to a MFD or chart plotter that can read and display AIS data, the built-in AIS receiver will guarantee your safety at sea by providing all the data you need for situational awareness and collision avoidance.

◆ Loud Hailer

15 W PA/Loud Hailer having 8 automatic fog/warning signals and a listen-back capability allowing for two-way communication.

◆ Class D DSC

With Class D DSC (Digital Selective Calling), the FM-4800 allows you to transmit both routine calls and distress calls in case of an emergency.

◆ NMEA2000 Interface

Plug and play NMEA2000 interface allows you to easily connect the FM-4800 to your navigation devices. When connected to the NavNet TZtouch2, DSC calls can be initiated directly from your MFD.

◆ Dual Station

The optional handset HS-4800 supports all the functionality of the FM-4800 and works as a second station. Intercom function is also supported.

SPECIFICATIONS

1. GENERAL

Channels	International, USA and Canada
Frequency stability	Within ± 1.5 kHz
Communication system	Simplex / Semi-duplex
Antenna impedance	50 ohms
Display	Monochrome, 192 x 128 dot (FM-4800, HS-4800)

2. TRANSMITTER

Frequency Range	156.025 MHz to 162.000 MHz
Output power	25 W max., 1 W at power reduction
Frequency deviation	± 5 kHz max.
Spurious emission	Standby: less than 2 nW Transmit: less than 0.25 μ W
Modulation	16K0G3E (F3E) Voice, 16K0G2B (F2B) DSC

3. RECEIVER

Frequency range	155.500 MHz to 163.275 MHz
Sensitivity	+6 dB μ V e.m.f. or less (SINAD 20 dB)
Channel selectivity	70 dB or more
Spurious response	70 dB or more

4. DSC

Protocol	Class D DSC
Sensitivity	0 dB μ V e.m.f. or less (BER < 1%)
Channel selectivity	70 dB or more
Spurious response	70 dB or more

5. AIS RECEIVER

Receiver frequency (CH)	161.975 MHz (AIS1), 162.025 MHz (AIS2)
Sensitivity	-107 dBm or less (PER < 20%)
Channel selectivity	70 dB or more
Spurious response	70 dB or more

6. GPS RECEIVER

Receiving frequency	1575.42 MHz
Number of channel	72 channels
Accuracy	10 m
Position fixing time (cold start)	120 sec typical
Position update interval	1 sec

7. LOUD HAILER / FOG HORN

Output power	30 W max. (4 ohm)
--------------	-------------------

8. INTERFACE

Number of port	NMEA0183 2 port (IN: 1, OUT: 1), NMEA2000 (3LEN) 1 port
NMEA0183 sentence	
Input	DTM, GGA, GLL, GNS, RMA, RMC
Output	DSC, DSE, GLL, RMC, VDM
NMEA2000 PGN	
Input	059392/904, 060160/416/928, 065240, 126208, 127258, 129026/029/044, 059392, 060928, 126208/464/993/996/998, 129025/026/029/038/039/040/041/540/793/794, 129795/797/798/801/802/808/809/810
Output	

9. POWER SUPPLY


Power voltage: 12.0 VDC (-10%, +30%) 5.0 A Max

10. ENVIRONMENT

Ambient temperature	-15°C to +55°C
Relative humidity	93% or less at +40°C
Degree of protection	IP67 (FM-4800, HS-4800, SP-4800)


EQUIPMENT LIST

Standard	Option
Transceiver Unit FM-4800	Handset HS-4800
Microphone MIC-4800	Speaker SP-4800
Installation materials	Handset extension cable (5/10 m)

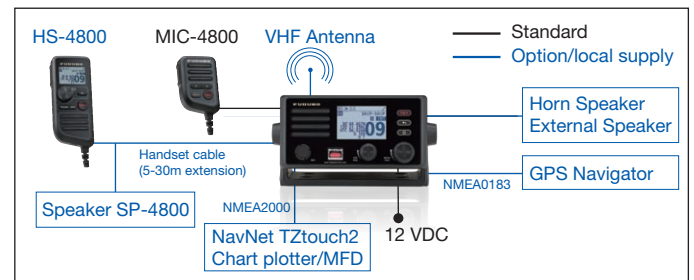


Transceiver Unit

FM-4800
1.7 kg 3.8 lb

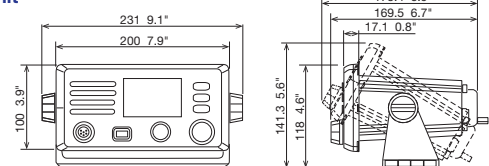


Microphone

MIC-4800
0.25 kg 0.56 lb




Handset (option)

HS-4800
0.3 kg 0.66 lb



Speaker (option)

SP-4800
0.76 kg 1.69 lb



Beware of similar products

All brand and product names are registered trademarks, trademarks or service marks of their respective holders.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

Learn more about marine fish finders we have.