




INSTRUCTIONS FOR INSTALLING RETAINING STRAP

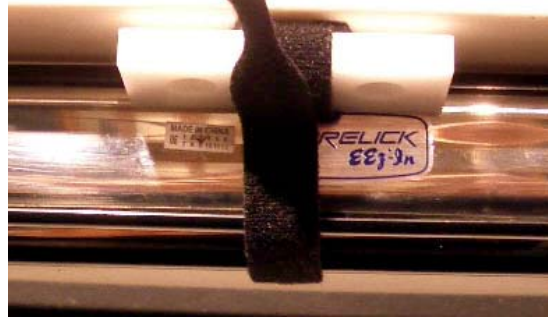

1. Locate the 12" long, black, hook and loop strap enclosed in the box with the ladder.
2. Pass the tip from one end of the strap through the slot in the other end, forming a loop.
3. Slip the white poly block into the loop and cinch the loop tight around the block. Make sure the hook and loop material will stick to itself once the block is fastened in place. If the hook and loop does not stick to itself, undo the loop and reverse the material and try again.
4. Position the white poly block and loop under the front edge of swim platform, mark and drill holes to proper depth, making sure not to drill completely through the swim platform.
5. Insert screws and tighten. You can now wrap the strap around one or two steps and it will keep the ladder from deploying when boat is underway.

MOUNTING INSTRUCTIONS

Thank you for selecting our superior quality Garelick EEz-In Brand Boarding Ladder. Your ladder was designed and manufactured using the finest material available to provide long product life. Choosing the proper size ladder for location and correct fit is important to assure safe, convenient, and reliable use.

Choose the most suitable side of your transom platform for mounting the ladder. When mounting, locate a place where the ladder will not interfere with the turning of the motor or be near the propeller of your craft.

MODELS 19615, 19616 – See Figure 1

1. Using the gudgeon as a template, mark the four bracket holes on the platform for drilling at desired location.
NOTE: Make certain that the brackets are located on a strong, solid surface of the platform. If this is not possible, use a backing plate as shown to make the platform strong enough for mounting.
2. Drill the four marked holes with a suitable drill bit, making sure to keep the drill perpendicular to the platform's surface.
3. Mount the ladder to the platform with fasteners suitable for your particular installation.
4. Periodically check fasteners for tightness and polish the stainless steel with a suitable marine grade polish to increase longevity.

Fold ladder up and secure when underway.

MODELS 19622, 19623 – See Figure 2

1. Position the mounting bracket with the ladder in the area to be attached. Mark the bracket's four mounting holes onto the deck surface.
2. Drill the four marked holes with a suitable drill bit.
NOTE: It is recommended to through-bolt this ladder for a secure installation.

3. Mount the ladder in place on one side by putting the ladder into the bracket and placing it up to the drilled holes. Insert mounting screws. Secure ladder in place with fasteners (not provided, as installations vary).
4. Slide the other mounting bracket, onto the ladder vertical as before. Center the ladder tubes within the brackets and make sure they are parallel to each other. Mark the hole locations of this bracket onto the deck. Drill holes and secure in place.

MAINTENANCE

• Keeping that bright finish!

Local weather conditions may contribute to minor corrosion. Stainless, like other metals, is not completely free from corrosion attack. Regular fresh water rinsing and periodic cleaning with a mild abrasive cleaner will help to retain lustre.

• Safety tip

Periodically check mounting hardware and re-tighten (due to normal boat operation).

SAFETY GUIDELINES

- No jumping or diving!
- Do not use when motor is running
- This ladder designed for boat use only
- Face ladder when entering boat or water
- Only one person on ladder at a time
- Check all steps and hardware before using
- Never operate your boat with the ladder in "down" position. Serious injury, or damage to your boat or ladder may result.

Figure 1 – Models 19615, 19616

FASTENER SUGGESTION

Note: Fasteners not provided

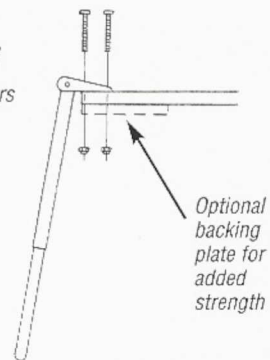


Figure 2 – Models 19622, 19623

