




Installation:

- Use TriLite to mark pilot holes. 1/8 inch holes recommended for most surfaces.
- Fasten TriLite to surface with two #8 size screws, appropriate for the material installed onto.
- Connect TriLite input wires to power source.

4x1 Trilite RGBW Photometric Sweep

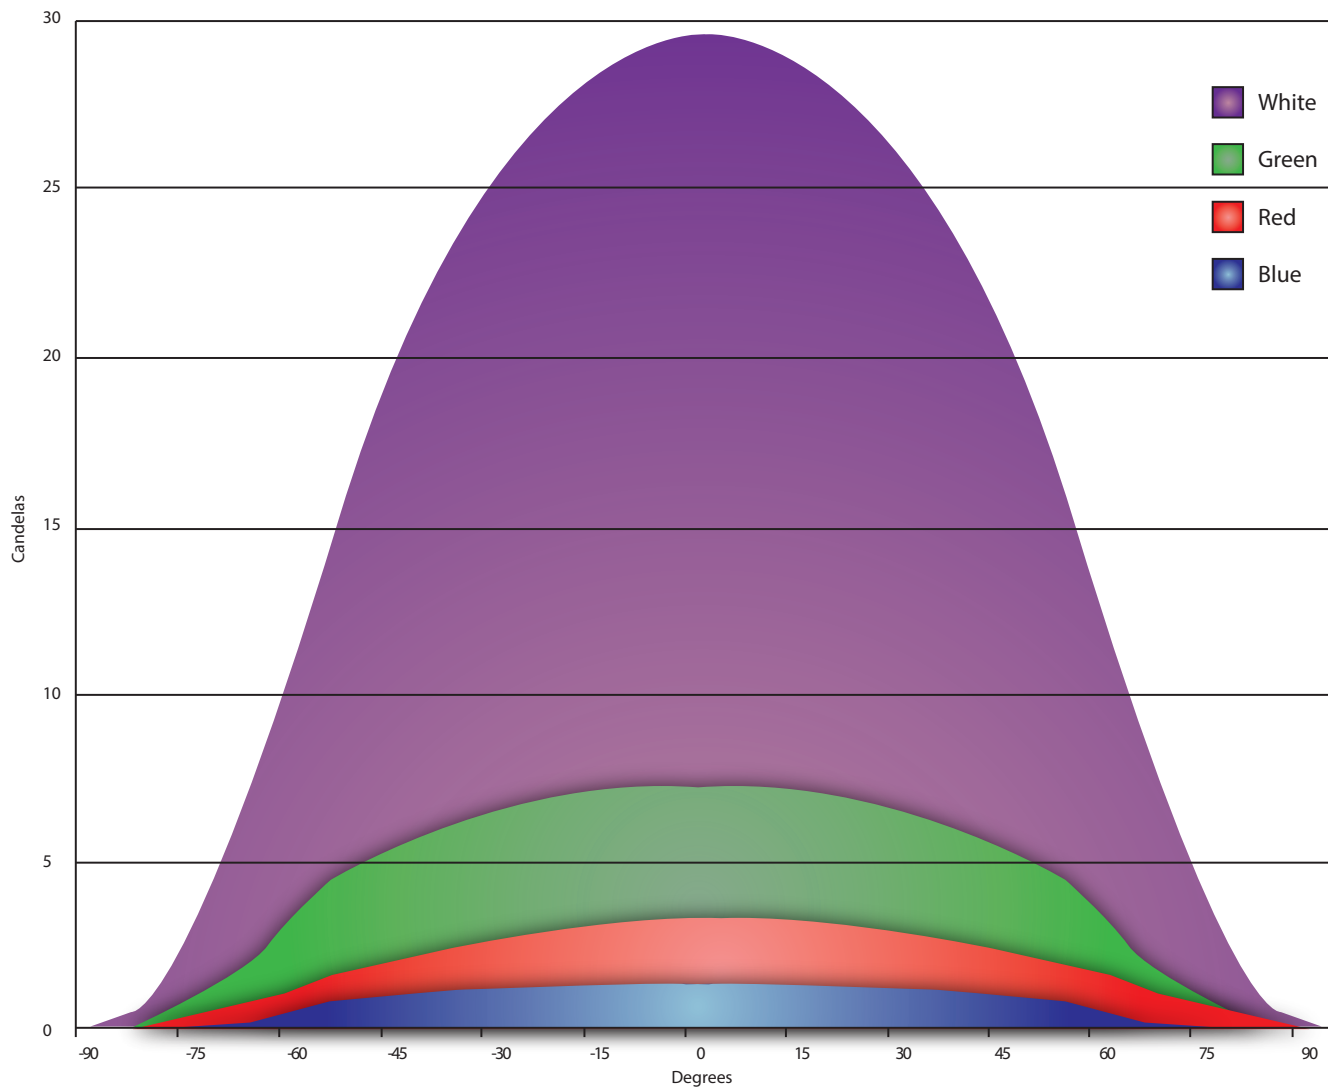



**INNOVATIVE
LIGHTING®**

RGBW TRILITE

055-43250-1 RGBW Trilite
055-9902-1 316 S.S. Snap-On Bezel



Shown with optional 316 S.S. Snap-On Bezel

Characteristics

- Dimensions: 4.25" x 1.375" x 0.625"
- 10 White LEDs
- 5 RGB LEDs
- Waterproof
- Clear Lens, Polycarbonate Housing
- Available 316 Highly Polished Stainless Steel Snap-on Bezel
- Impact Resistant
- Shock and Vibration Proof

Connectors:

- 5-8" Leads
- 18 Gauge Wire

- Ground - Black
- White Light - White (+)
- Blue Light - Blue (+)
- Red Light - Red (+)
- Green Light - Green (+)

Voltage Requirements:

- Operates on 9-16 Volts DC

Current (mA):

- White - 79.7
- Red - 33.14
- Blue - 37.05
- Green - 35.94



Check out the collection of boat interior lighting we offer.