

FIRST ANGLE PROJECTION

REMOVE ALL BURRS AND SHARP EDGES




ISSUE	REVISION	MOD No.	DATE
F	SEE MOD NOTE	10503	18-Jan-07
E	SEE MOD NOTE	10480	11-Jan-07
D	SEE MOD NOTE	10392	27-Nov-06
C	SEE MOD NOTE	10377	21-Nov-06
B	SEE MOD NOTE	10232	31-Aug-06

BASIC DIMENSIONS OF GALVANISED DELTA ANCHOR

	A	B	C	D	E	F	G	∅H	I	J	K (kg)
4 kg	217 ±4	514 ±10	230 ±9	8 -0/+1,7	210 ±4	387 ±8	4 ±0,4	8 ±0,4	116 ±2,3	71 ±1,4	1,5
6 kg	254 ±5	593 ±12	265 ±11	10 -0/+1,7	243 ±5	450 ±9	4 ±0,4	10 ±0,4	148 ±3,0	81 ±1,6	2,7
10 kg	293 ±6	695 ±14	310 ±12	12,5 -0/+1,7	282 ±6	526 ±10	5 ±0,4	10 ±0,4	172 ±3,4	95 ±1,9	4,0
16 kg	339 ±7	812 ±16	362 ±14	12,5 -0/+1,7	328 ±6	614 ±12	5 ±0,4	12 ±0,4	205 ±4,0	114 ±2,2	6,1
20 kg	370 ±7	877 ±18	392 ±16	16 -0/+1,9	357 ±7	663 ±13	6 ±0,4	12 ±0,4	225 ±4,5	123 ±2,5	8,0
25 kg	397 ±8	945 ±19	415 ±17	16 -0/+1,9	387 ±8	713 ±14	6 ±0,4	12 ±0,4	245 ±4,9	135 ±2,7	9,9
32 kg	425 ±8	1023 ±20	453,5 ±18	20 -0/+1,9	425 ±8	775 ±15	8 ±0,4	16 ±0,5	254 ±5,0	142 ±2,8	10,8
40 kg	461 ±9	1099 ±22	489 ±20	20 -0/+1,9	435 ±9	833 ±16	8 ±0,4	16 ±0,5	265 ±5,3	154 ±3,1	13,7
50 kg	486 ±10	1175 ±24	523 ±21	20 -0/+1,9	479 ±10	890 ±18	8 ±0,4	16 ±0,5	282 ±5,6	158 ±3,2	18,2
63 kg	537 ±11	1270 ±25	567 ±23	22 -0/+1,9	508 ±10	963 ±19	8 ±0,4	25 ±0,5	290 ±5,8	171 ±3,4	24,6

BASIC DIMENSIONS OF ST/ST DELTA ANCHOR


	A	B	C	D	E	F	G	∅H	I	J	K (kg)
6 kg	254 ±5	593 ±12	265 ±11	10 ±0,4,3	243 ±5	450 ±9	4 ±0,5	10 ±0,4	148 ±3,0	89 ±1,8	1,6
10 kg	293 ±6	695 ±14	310 ±12	12,5 -0/+1,5	282 ±6	526 ±11	5 ±0,5	10 ±0,4	172 ±3,4	104 ±2,1	2,8
16 kg	339 ±7	812 ±16	362 ±14	12,5 -0/+1,5	328 ±7	614 ±12	5 ±0,5	12 ±0,4	205 ±4,0	114 ±2,3	6,1
20 kg	370 ±7	877 ±18	392 ±16	16 -0/+1,5	357 ±7	663 ±13	6 ±0,5	12 ±0,4	225 ±4,5	122 ±2,4	6,0
25 kg	397 ±8	945 ±19	415 ±17	16 -0/+1,5	387 ±8	713 ±14	6 ±0,5	12 ±0,4	245 ±4,9	121 ±2,4	8,8
32 kg	432 ±8	1028 ±20	446 ±18	20 -0/+1,5	407 ±8	774 ±15	8 ±0,5	16 ±0,5	250 ±5,0	143 ±2,8	6,5
40 kg	461 ±9	1099 ±22	489 ±20	20 -0/+1,5	435 ±9	833 ±17	8 ±0,5	16 ±0,5	265 ±5,3	164 ±3,3	10,7
50 kg	486 ±10	1175 ±24	523 ±21	20 -0/+1,5	479 ±10	890 ±18	8 ±0,5	16 ±0,5	282 ±5,6	167 ±3,3	17,2
63 kg	537 ±11	1270 ±25	567 ±23	22 -0/+1,5	508 ±10	963 ±19	8 ±0,5	25 ±0,5	290 ±5,8	185 ±3,7	18,3

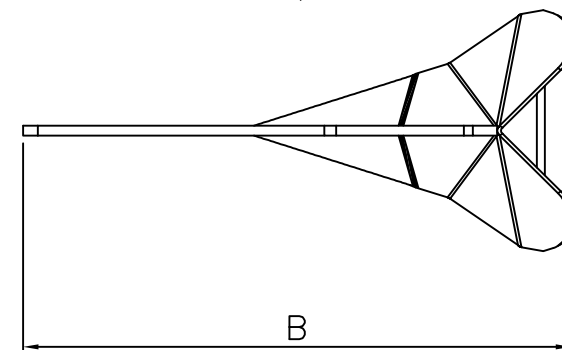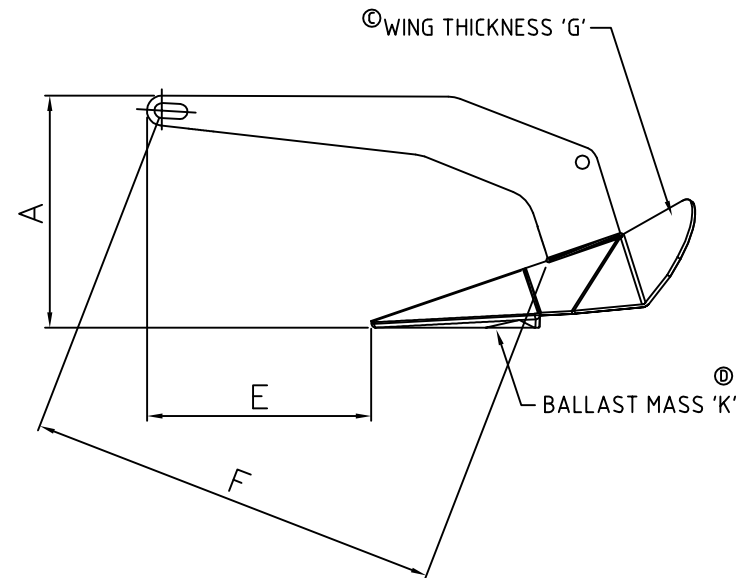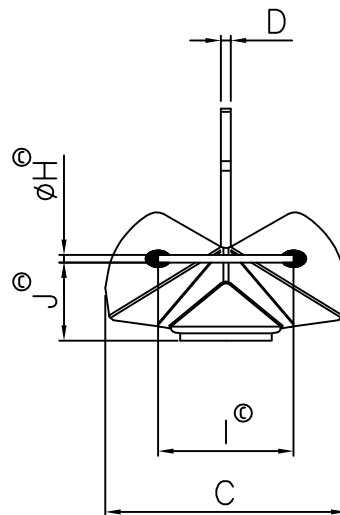

NOTE:
 FOR GALVANISED ANCHORS - STEEL BALLAST IS WELDED DIRECTLY TO WINGS.
 FOR ST/ST ANCHORS - LEAD BALLAST IS HELD INSIDE WELDED CHAMBER.

Learn more about anchors and docking on our website.

PART No. 60000431



Unauthorized use, manufacture or reproduction
 in whole or in part is prohibited

MATERIAL	ALL DIMENSIONS IN mm	DRN MD	TITLE DELTA ANCHOR SPECIFICATION	
	TOLERANCES (AS STATED)	DATE 17-July-06		
FINISH		SCALE NTS	PART No. 60000431	LEWMAR
	MODEL NAME:			