
DATA SHEET | 2022




LUMI

Cut and Seal LUX Superbright Strip Light SL180 (IP68)



LUMISHOR

PART DESCRIPTION	CUT AND SEAL - LUX SUPERBRIGHT STRIP LIGHT - 180 LED PER METER - IP68		
Part Number 60-0466-1000 - Lux Strip Light SL180 (IP68) CRGBW – 1000mm (Cut and Seal) 60-0466-2500 - Lux Strip Light SL180 (IP68) CRGBW – 2500mm (Cut and Seal) 60-0466-5000 - Lux Strip Light SL180 (IP68) CRGBW – 5000mm (Cut and Seal)			
Available colorsFull Spectrum RGB and White Color Temperature Tunable (2700K to 6500K) in the same LED strip			
LED type	Warm White, Cold White, Red, Green and Blue (5 Channel)		
LED Density	180 LEDs per meter		
Warranty	2 years		
Compatible Drivers	Lux Strip Light Driver (see accessories)		
Customer Control Options	Lumi-Link Command Center Customer Supplied Momentary Switch		
Installation	Cut to length, and seal the cut end before installation Plug and Play		

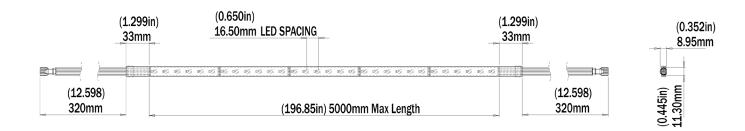

SUGGESTED MOUNTING BRACKET SPACING					:	CU	IT LOO	CATIO	NS	P			
Terris aris aris aris aris aris aris aris	<u>.</u> []]	±[0]	TÎ <u>O</u> Î	<u>[0]</u>		<u>=</u>]0]		<u>5</u>	<u>[]</u>		E	6	

(3.937in) 100mm CUT LENGTH

DATA SHEET | 2022



Cut and Seal LUX Superbright Strip Light SL180 (IP68)



TECHNICAL	
Compatible Drivers	Lux Strip Light Driver (see acces- sories)
Number of LED strips per Driver	Multiple - up to 10m (32.8') total

PHYSICAL	
Ingress Protection	IP68
Cross Section	14.5mm x 5mm (0.57" x 0.2")
Lengths Available	1m, 2.5m and 5m (3.3ft, 8.2ft and 16.4ft) (not including cables)
Construction	Fully Encapsulated and Potted
Mechanical Installation	Cut to Length and Seal before install Cut in 100mm steps Adhesive Backing and Screw Clips
Weight - g/m (oz/ft)	95 g/m (1 oz/ft)
UV Resistant	Yes
Salt Spray Tested	Yes
Installation Location	Outdoor / Partially Covered Areas/ Indoor For above water applications only

ACCESSORIES					
Accessory	Part number				
Lumi-Link Command Center	60-0366				
Lux Strip Light Driver - Voltage Stab- lised (10.5 - 31V DC)	60-0383				
Lux Strip Light Driver - Non-Stabilised (23-25 V DC)	60-0384				
Strip light extension cable - 1m	60-0385				
Strip light extension cable - 2m	60-0386				
Strip light extension cable - 3m	60-0387				
Strip light extension cable - 4m	60-0388				
Strip light extension cable - 5m	60-0389				
6-core cable splitter - 2 way	60-0438				
6-core cable splitter - 3 way	60-0439				
Stainless Steel Clips (Bag of 25)	60-0409				