

# Assembly, Installation, Care & Use Instructions

## R10-1003-64

Kayak/SUP Dock Storage Rack System. Base rack arms and additional arms include pre-installed UV resistant padding with heavy duty UV resistant 600D Polyester protective covers

### APPLICATION

Over the Water Dock Mounted Kayak/SUP Storage Rack

### ASSEMBLY & INSTALLATION

#### • DETERMINE DESIRED MOUNTING LOCATION ON DOCK

- **NOTE: MARKING RACKS LOCATION AND INSTALLATION REQUIRES (2) PEOPLE**
- Place vertical uprights in desired location and mark (12) mounting hole locations
- Place 2nd upright at desired distance apart and repeat steps

#### • ATTACHING TO DOCK

- Using a 5/32" drill bit, drill (12) small pilot holes at marked mounting hole locations prior to installation
- Using (12) 14 x 1-1/2" Truss head screws and a Phillips head screw driver, attach assembly to dock and securely tighten
- Verify alignment and spacing; repeat steps for 2nd vertical upright installation
- Installing Optional Storage Arms to Rack (Sold Separately, Not Included)
- Once necessary space required between equipment is determined, vertically space arms accordingly
- Fit attachment bracket over vertical upright
- Install (2) 1/4"-20 x 2" button socket cap screws and (2) 1/4"-20 lock nuts
- Secure using a 7/16" wrench and (supplied) 5/32" hex key wrench
- Adjusting Storage Arms to Fit Equipment
- If additional adjustment is required to fit larger or smaller equipment, simply remove attachment fasteners, reposition arms in desired location
- Repeat installation process

#### • CARE & USE

- Kayak's and SUP's should be secured to rack when not in use
- Periodically wash rack with environmentally friendly soap, fresh water, and a clean cloth to remove any debris, and wipe dry
- Water toys should always be rinsed with fresh water before storing

#### • SECURING EQUIPMENT TO RACK (SECURING TIE-DOWN STRAPS NOT INCLUDED)

- Attach tie-down strap to rack's arm connection at the main frame, extend over equipment, and attach strap's hook to tie-down point

### CONTENTS



**A** (2) — 1-1/2" x 64" Stainless steel Over the Water Uprights

**B** (24) — 14 x 1-1/2" Stainless steel truss head screws

### TOOLS REQUIRED

- Drill
- 5/32" Drill bit
- #3 Phillips head screw driver
- 7/16" Wrench
- 5/32" Hex key wrench  
(Supplied with rack arm sets)

**NOTE:** Additional optional arms required for complete installation

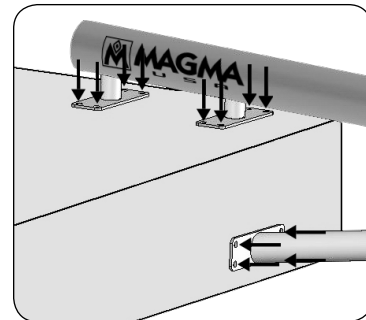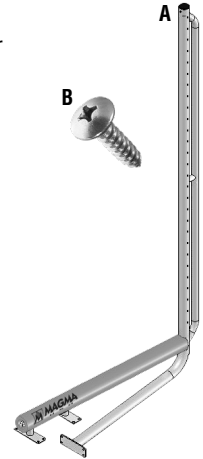

**MAGMA**<sup>®</sup>  
U S A