

OceanLED Marine **Product Support**

Ensure vessels cathodic protection EYES HD GEN2 system is connected to this earth bonding point. INSTALL Composite Video **HD-SDI** Output Black power jack 12V DC (100mA draw max). Output K 12/24v regulator


10/20m HD

Extension

Drill Ø35mm (1 3/8") hole in suitable position. Apply marine sealant to back of bronze flange.

To orientate picture, mount with

Optional HDSDI to HDMI Converter

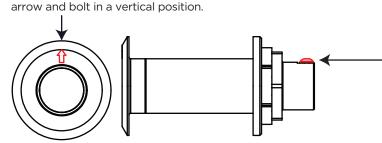

Earth bonding point.

Earth bonding point.

Optional Remote -Input

> **Ensure vessels cathodic protection** system is connected to this earth bonding point.

PLEASE ENSURE **CONNECTIONS ARE** MADE AND MAINTAINED IN A WATERPROOF **ENVIRONMENT**