




Cat. Nos. 0570 Series Gas Tank Vent

INSTALLATION INSTRUCTIONS

Read all directions before proceeding.

- 1). Tank vent must be installed in accordance with U.S.C.G. Safety Standards for Boat Gasoline Fuel Systems, #33CFR183 and A.B.Y.C. Standard H-24. Locate
- 2). mounting surface with thickness up to 1/2 inch maximum.
- 3). Drill 3/4 inch diameter hole in mounting surface.
- 4). Make sure vent head is tightened against threaded end of vent neck to insure proper seal.
- 5). Remove nut and washer, insert vent neck in mounting hole, and apply bedding compound around outside of mounting hole.
- 6). Attach washer and nut; tighten securely.
- 7). Attach vent hose to barbed end of vent neck, and secure with a hose clamp.
- 8). To pressure test fuel system, remove splash guard, and attach optional orange test cap (Cat. No. 0101).
- 9). Remove test cap, and reattach splash guard after pressure testing.

PERKO, INC

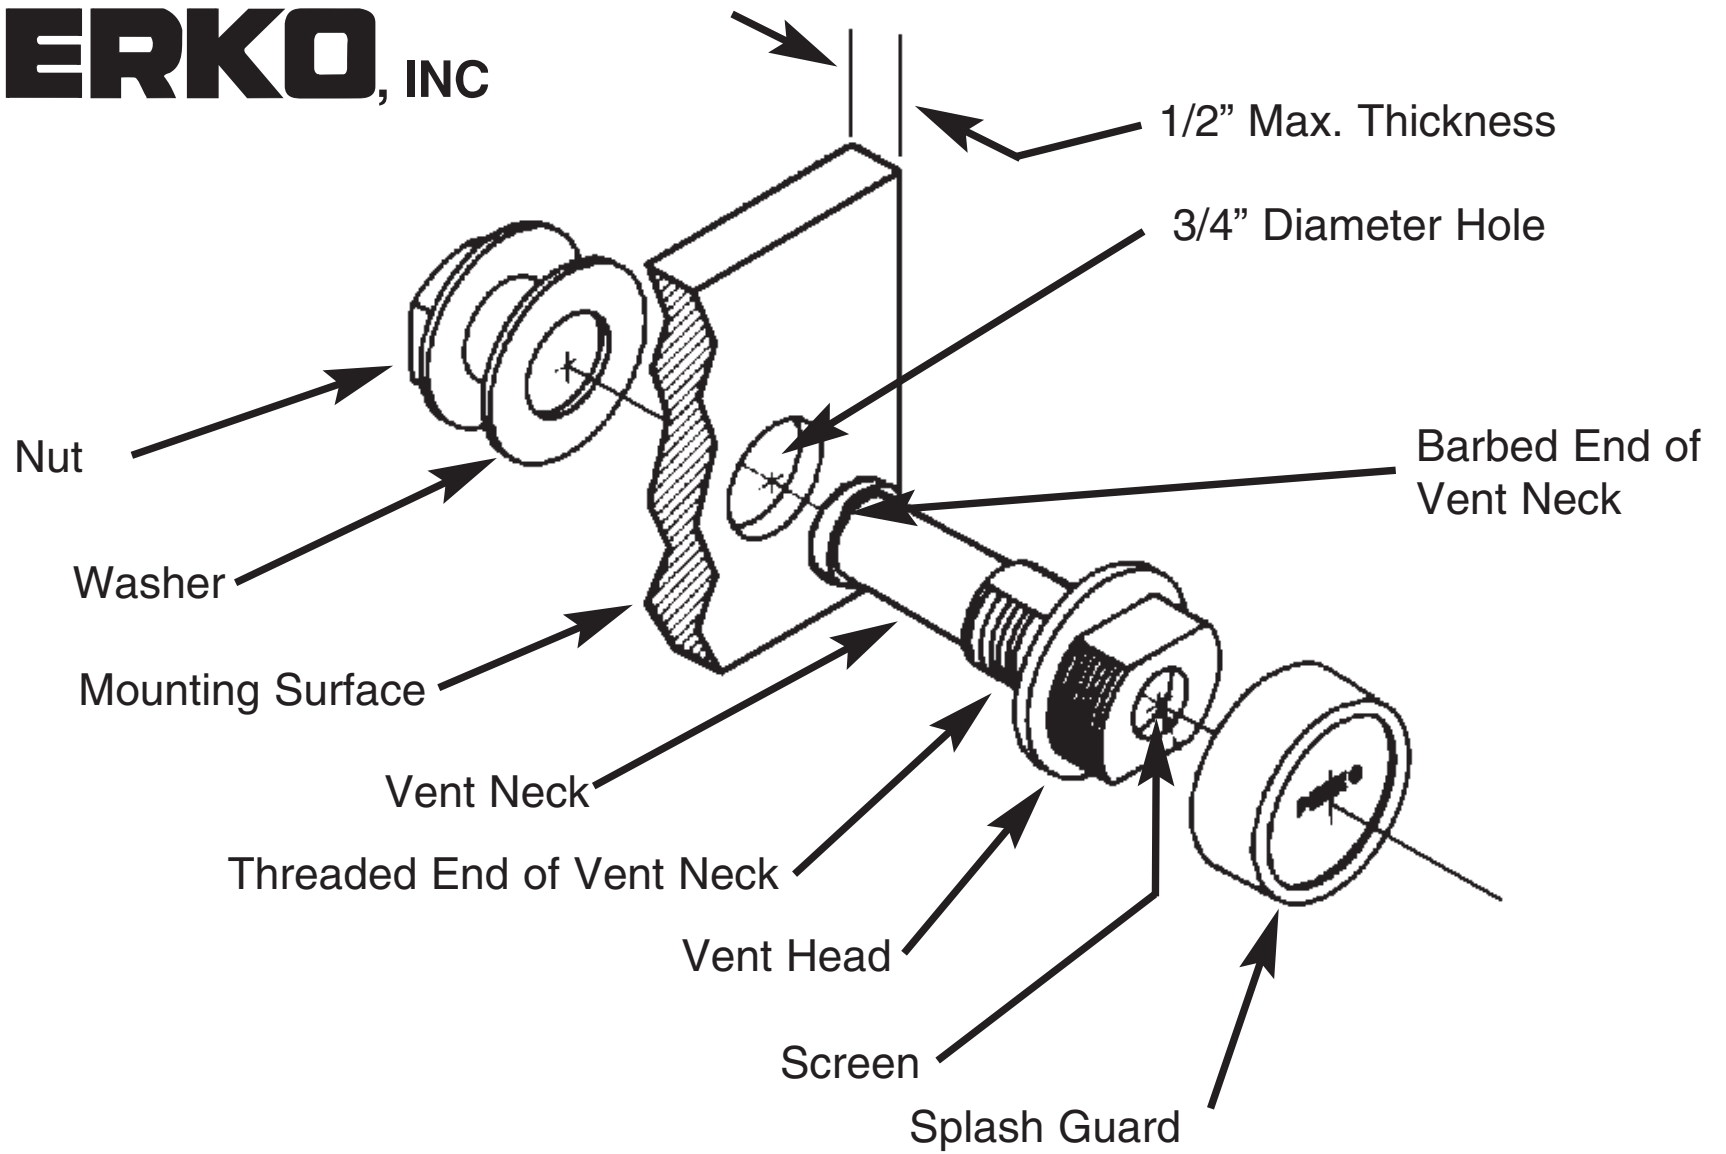

(Over)