


SP200RG Rotating Popup Speaker Cutout Template



Overall diameter with trim ring
5.850" (150mm)

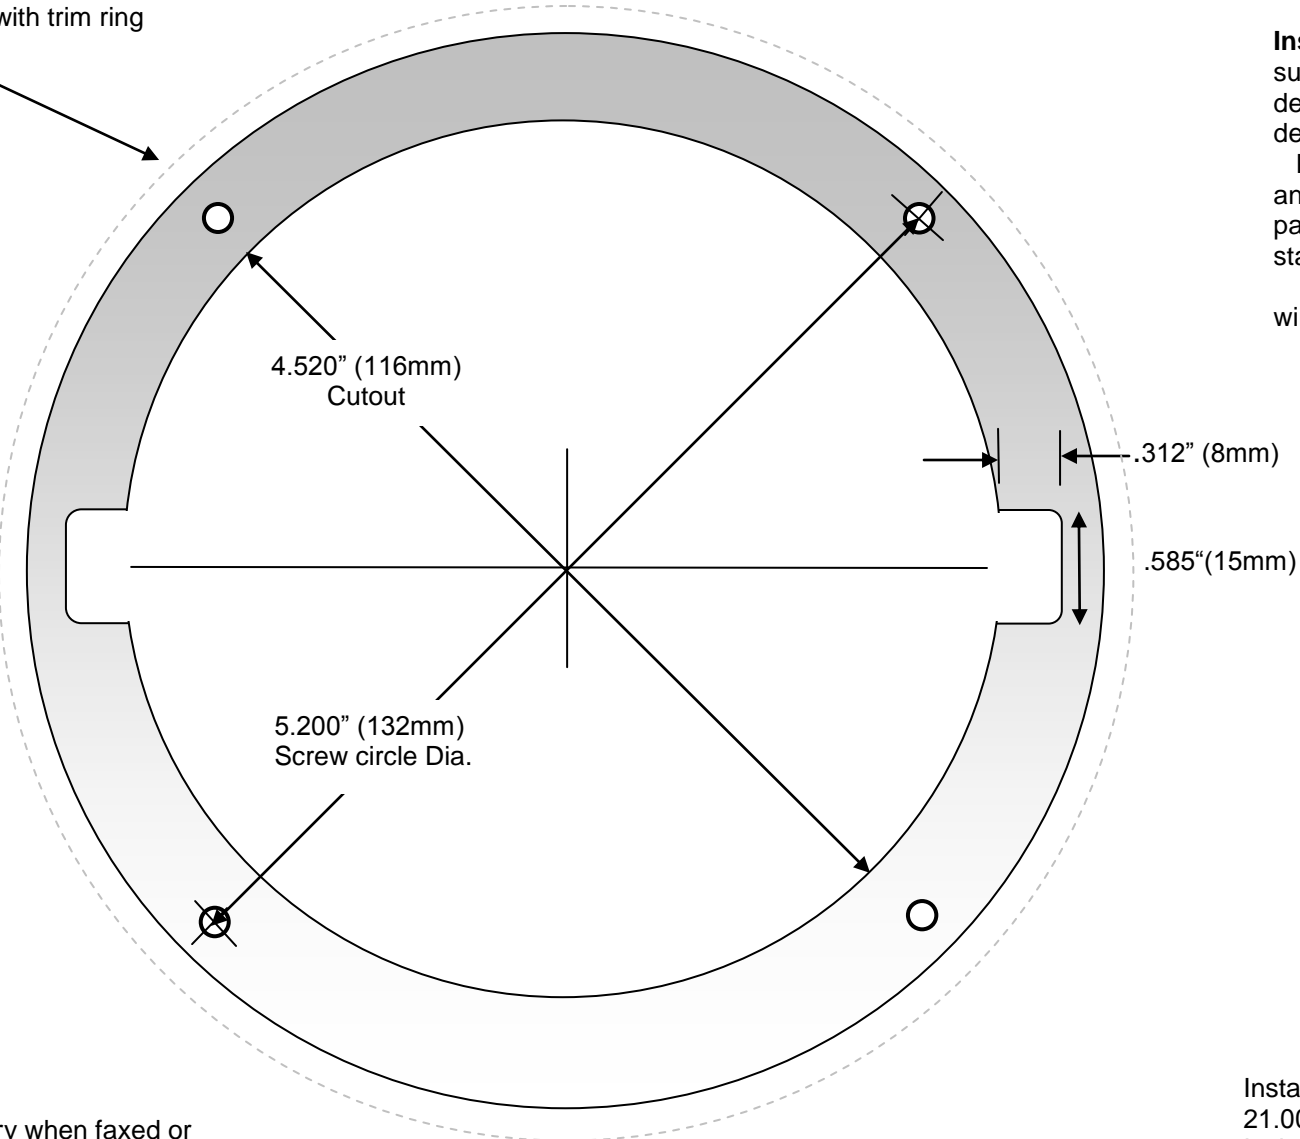


Installation: Find a suitable location making sure there is clearance for the installed depth. Use a hole saw or other suitable device to make a cutout.

Place the speaker in the cutout and mark and drill holes for the mounting screws. If the panel is too thin or soft for screws use a stainless screw clips.

Attach speaker wires supplied, solid color wire to positive.

Scale 1:1
Accuracy may vary when faxed or otherwise duplicated

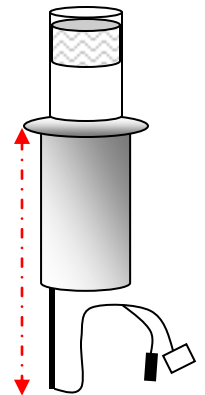

Installed depth from Flange
21.000" (533mm)
Includes 1" (25mm) clearance for wires