



Installation Instructions



#10502





#10487



#10479
#10507





Unscrew this chrome cap ring from the faucet body.

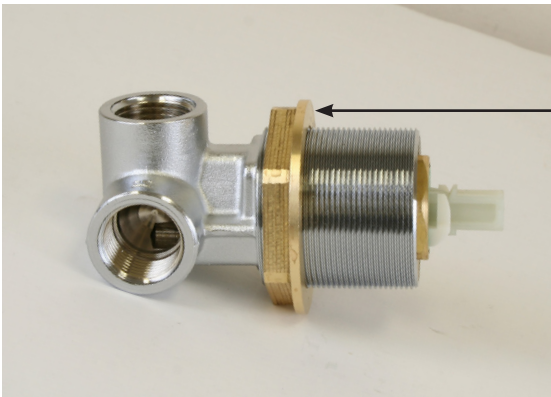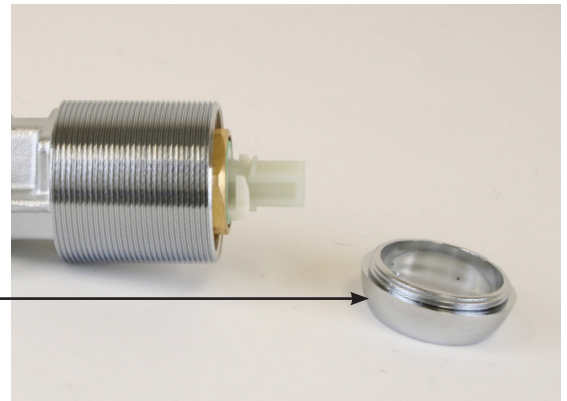


Screw on the brass mounting nut and insert faucet through the 1-5/8" mounting hole from the back.

Place the escutcheon ring on and screw on the chrome finish ring until it just covers the treads

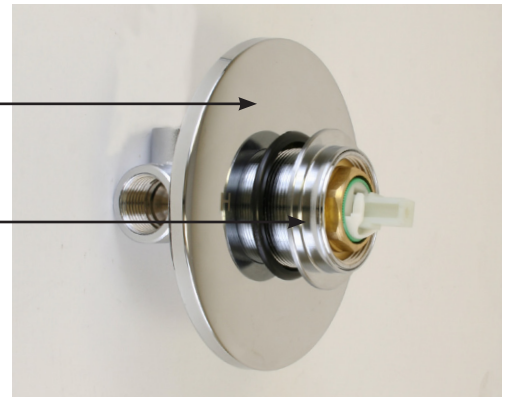

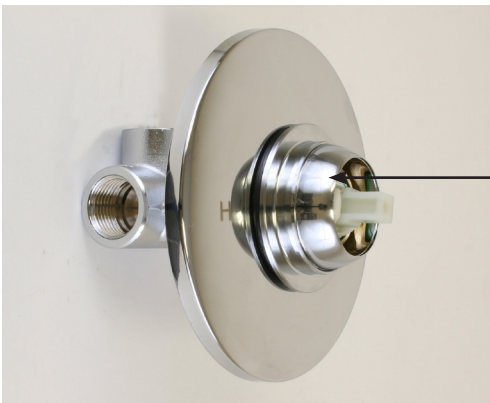

Screw the chrome cap ring back on. Tighten the brass mounting nut behind the bulkhead to fix the faucet to the bulkhead.

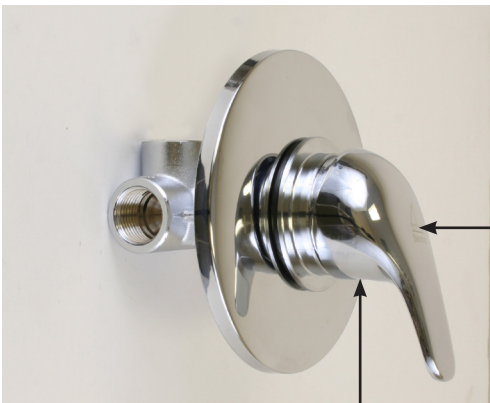

Place the faucet handle onto the valve stem and tighten the hex set screw with a 2.5mm hex wrench.

Press the red/blue plastic cap into the set screw hole.

