


FOOT CONTROL SWITCH For All Hand-Operated Trolling Motors Installation Instructions



12V or 24 VDC / 50-28101

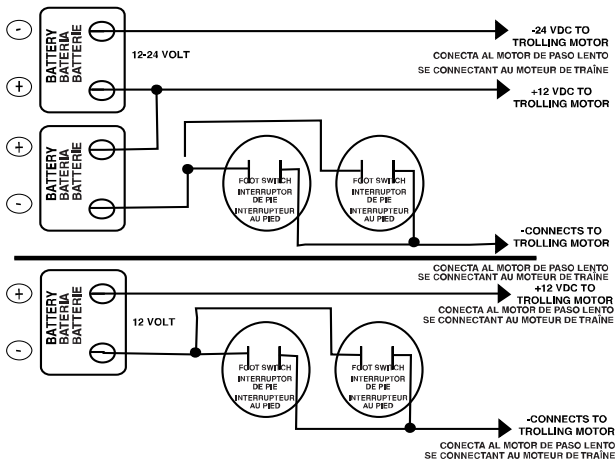

NOTICE: We recommend a full service marine dealer install this product to insure proper fit and trouble free operation. These instructions should be placed with product for the owner's future use.

WARNING: Disconnect all battery cables at battery before attempting to install this product.

STEP 1: Select location for foot control switch that can be operated easily with foot while fishing. Normally for bow mounts a foot switch is mounted on both sides of front casting seat for easy operation. Check location to make sure that there are no obstructions under deck.

STEP 2: For deck mount or front platform installations, drill a 3/8" dia. hole and run wire from switch down thru hole. Place switch housing flat down on casting deck and using housing as drill template, mount switch to deck using either #10 pen head screws or 3/16" dia. pop rivets (not furnished).

STEP 3: Hook up wire per diagram.

NOTE: All electrical connections should be protected with tape or rubber covering to prevent possible shorting.

NOTE: All trolling motor wiring systems must be fused at the battery for safety and protection. To prevent loose and corroded connections, all joints should be soldered.

STEP 4: Reconnect all battery cables and check for proper operation.

MAINTENANCE INSTRUCTIONS

Maintenance inspection is the owners' responsibility and must be performed as follows:

NORMAL SERVICE: Every 50 hours of operations

SEVERE SERVICE: Every 25 hours of operation

NOTE: Operation in salt water areas is considered "**SEVERE SERVICE.**"

1. Check mounting hardware for adequate tightness.
2. Check all electrical connections.
3. Check wire for abrasions or cuts, replace if necessary.