





## OUTRIGGER POLE HOLDER INSTALLATION




- Mount base in area with at least 3" of clearance below flange
- Using a hole saw (1-1/2"), cut hole at approximately 45° angle in the forward direction. It may be necessary to trim with a rasp or file so that the flange seats flat to mounting surface. **DO NOT ATTEMPT TO DRAW FLANGE DOWN WITH THE MOUNTING BOLTS, AS THIS COULD DAMAGE HOLDER**
- Use flange to mark holes & drill to secure with 1/4" flat or oval stainless steel bolts (not included)

### RIGGING POLES

- Mount stainless steel strap eye between outrigger and fishing pole holder
- Attach snap of snubber to strap eye
- Tie end of rigging line to trolling clip, feed line through glass eye on snubber and through guides on (extended) outrigger pole, and leaving desired amount of excess line, cut and tie to other end of trolling clip
- The snubber is intended to keep tension on rigging line in order to maintain trolling clip (with fishing line) at desired distance up on the outrigger pole



# OUTRIGGER POLE HOLDER INSTALLATION

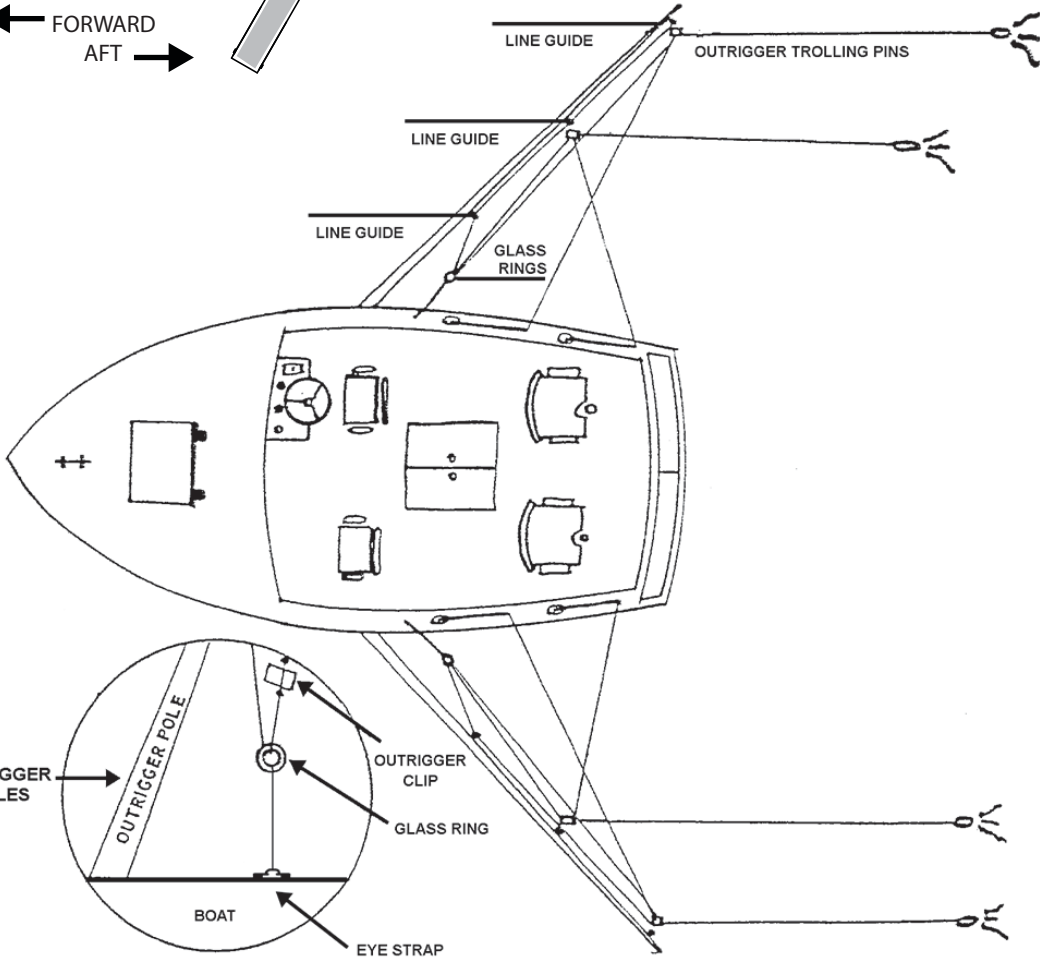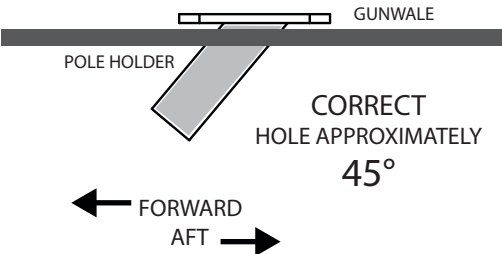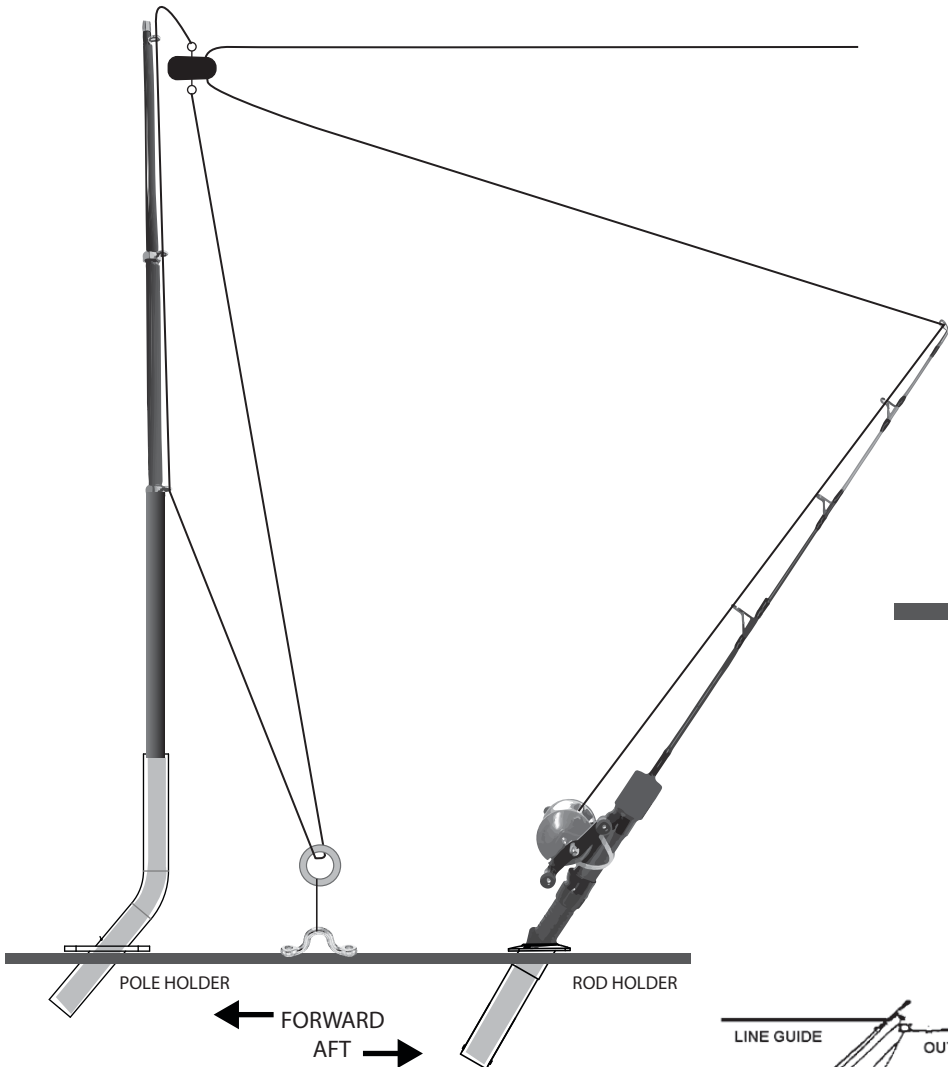

Shop for other fishing tools & equipment on our website.