

# SPECIFICATIONS

**⚠ WARNING**

**DO NOT** exceed peak operating pressure. 1000psi.

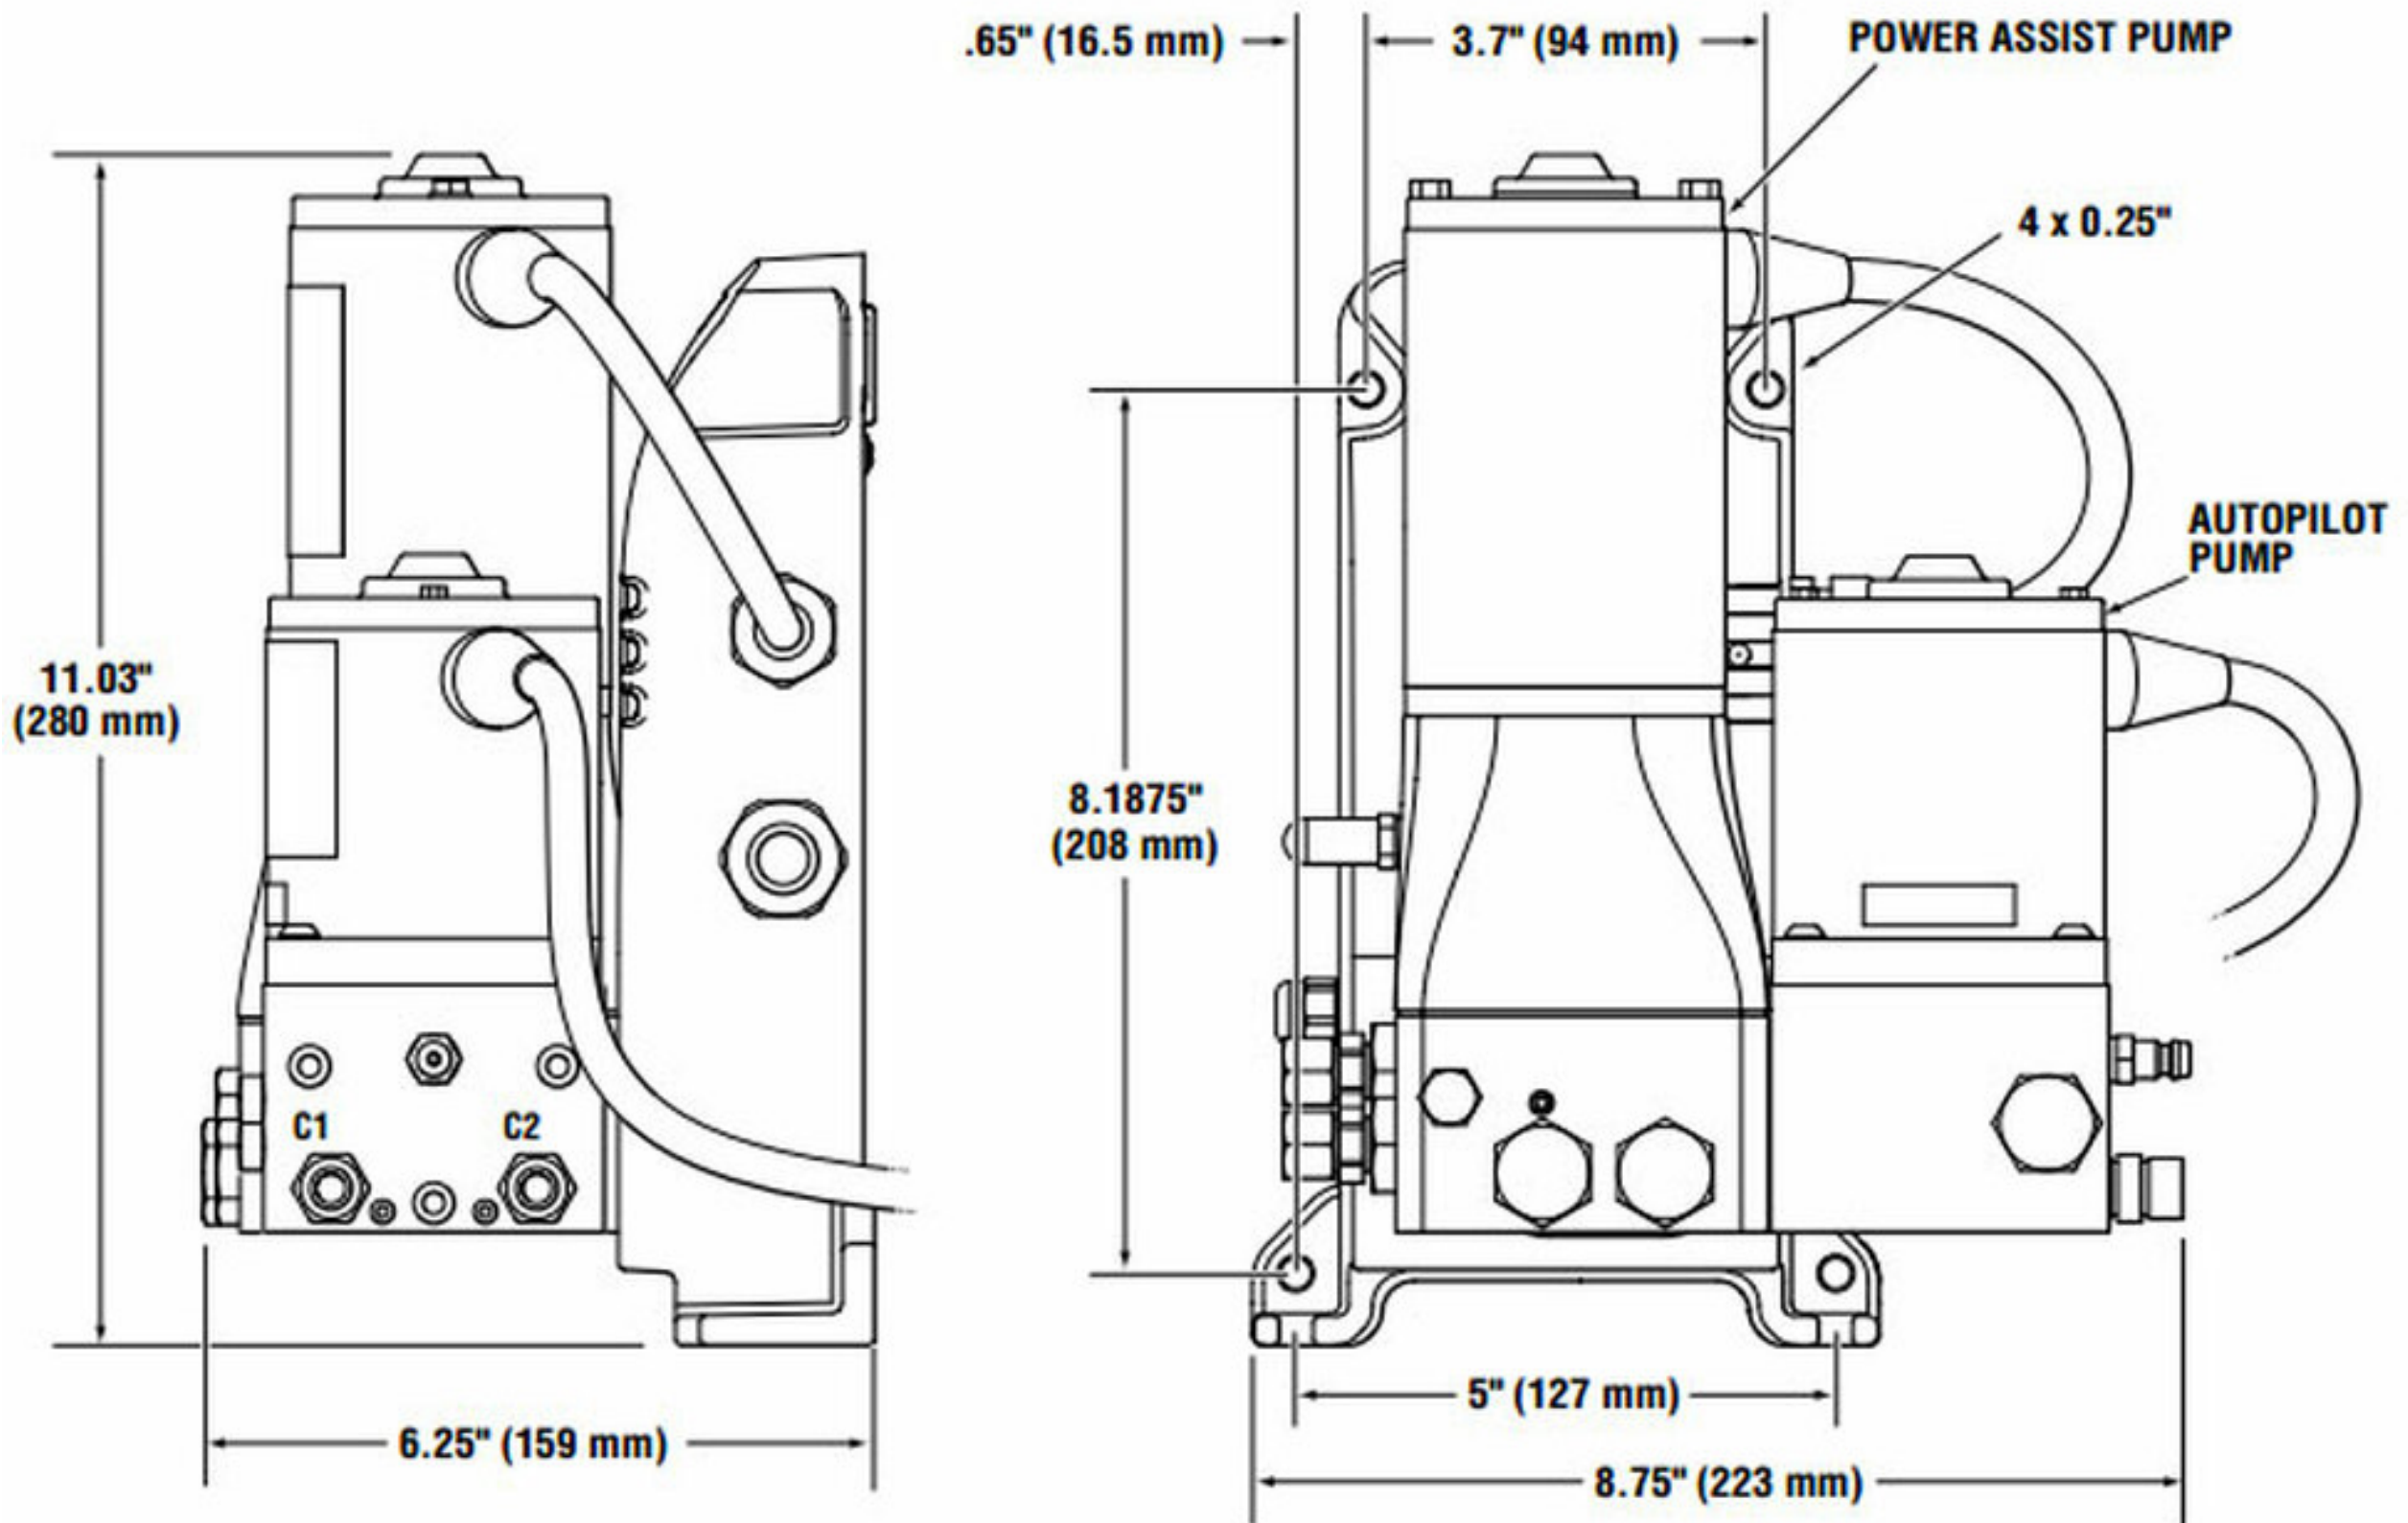


Figure 2.

## SEASTAR PAA 12/24 VOLT

- 12/24 Volts (Automatically Recognized)
- 1000 psi MAX system peak pressure (500 psi working load)
- PEAK current draw = 60 amps
- MAX current draw = 40 amps
- Purple ignition wire MAX. current draw = 1 amp
- Typical current draw:  
Single outboard ~ 3 amps, average  
Twin Rudder inboard ~ 8 amps, average

## 12V AUTOPILOT SPECIFICATIONS

- 12 Volts
- 1000psi MAX system pressure
- Flow Rate (No-Load): Type 1: 60in<sup>3</sup>/min / Type 2: 100in<sup>3</sup>/min
- Typical current draw (up to 300 psi): Type 1: 4–8A / Type 2: 5–11A
- Cylinder Capacity: Type 1: 4.9–12.5in<sup>3</sup> / Type 2: 12.5–21in<sup>3</sup>

## 24V AUTOPILOT SPECIFICATIONS

- 24 Volts
- 1000psi MAX system pressure
- Flow Rate (No-Load): Type 1: 60in<sup>3</sup>/min / Type 2: 100in<sup>3</sup>/min
- Typical current draw (up to 300 psi): Type 1: 2–4A / Type 2: 3–6A
- Cylinder Capacity: Type 1: 4.9–12.5in<sup>3</sup> / Type 2: 12.5–21in<sup>3</sup>