

SSIL[®]





HEADUNITS 3 - 27

REAR VIEW
CAMERAS 28 - 29

SUBWOOFERS 30 - 35

AMPLIFIED
SUBWOOFERS 36 - 43

SPEAKERS 44 - 50

AMPLIFIERS 51 - 75

ATV AUDIO
SYSTEMS 76 - 79

SOUNDBARS 80 - 81

MOTORCYCLE
SPEAKER PODS 82

MARINE HEADUNITS
& AUDIO SYSTEMS 83 - 85

CROSSOVERS 86 - 87

EQUALIZERS 88 - 89

CAPACITORS 90 - 91

AMPLIFIER
WIRING KITS 92 - 94



SDML10ACP

BLUETOOTH® | 340 WATTS

10.1" MEDIA RECEIVER with Apple CarPlay / Android Auto™

FEATURING 10.1" (257 mm) CAPACITIVE TOUCHSCREEN AND MULTICOLOR ILLUMINATION OPTIONS



*Steering wheel interface control not applicable with all vehicles.

iPod® and iPhone® are trademarks of Apple, Inc. registered in the U.S. and other countries. Sound Storm Laboratories is not allied with Apple, Inc.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Sound Storm Laboratories is under license. Other trademarks and trade names are those of their respective owners. Android Auto is a trademark of Google LLC.

Use of the Apple CarPlay logo means that a vehicle user interface meets Apple performance standards. Apple is not responsible for the operation of this vehicle or its compliance with safety and regulatory standards. Please note that the use of this product with iPhone may affect wireless performance.

PLAYBACK

- High-Resolution FLAC
- WAV/MP3/WMA
- **BLUETOOTH®** Audio Streaming
Stream and Control your Favorite Music APPs

INPUTS & OUTPUTS

- USB Port 1: CarPlay & Android Auto™, 1.5A Charging
- USB Port 2: Media & 1.5A Charging
- **Compatible with Audio Output of iPod®/iPhone®, Smartphones and MP3 players**
- A/V Input
- Front & Rear Camera Input
- 4V Front, Rear, Sub Pre-Amp Outputs
- External BT Mic

GENERAL

- **BLUETOOTH®** Hands-Free
- Apple CarPlay & Android Auto
- Single-DIN Fit (Double-DIN Adapter Brackets included)
- AM/FM Receiver
- Capacitive Touchscreen
- Switchable US & EU Tuner Frequencies
- Steering Wheel Control Input (*Interface not included)
- RBDS/RDS
- Update via USB
- Multicolor Illumination
- 85 Watts x 4 Channel Amplifier





SDML10ACPR

BLUETOOTH® | 340 WATTS

10.1" MEDIA RECEIVER with Apple CarPlay/Android Auto™ and REAR VIEW CAMERA

FEATURING 10.1" (257 mm) CAPACITIVE TOUCHSCREEN AND MULTICOLOR ILLUMINATION OPTIONS

INCLUDES MINI LICENSE PLATE CAMERA FEATURING HIDDEN MOUNT



 Bluetooth®

 Works with
Apple CarPlay

 works with
androidauto



*Steering wheel interface control not applicable with all vehicles.

iPod® and iPhone® are trademarks of Apple, Inc. registered in the U.S. and other countries. Sound Storm Laboratories is not allied with Apple, Inc.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Sound Storm Laboratories is under license. Other trademarks and trade names are those of their respective owners. Android Auto is a trademark of Google LLC.

Use of the Apple CarPlay logo means that a vehicle user interface meets Apple performance standards. Apple is not responsible for the operation of this vehicle or its compliance with safety and regulatory standards. Please note that the use of this product with iPhone may affect wireless performance.

PLAYBACK

- High-Resolution FLAC
- WAV/MP3/WMA
- **BLUETOOTH®** Audio Streaming
Stream and Control your Favorite Music APPs

INPUTS & OUTPUTS

- USB Port 1: CarPlay & Android Auto™, 1.5A Charging
- USB Port 2: Media & 1.5A Charging
- **Compatible with Audio Output of iPod®/iPhone®, Smartphones and MP3 players**
- A/V Input
- Front & Rear Camera Input
- 4V Front, Rear, Sub Pre-Amp Outputs
- External BT Mic

GENERAL

- **BLUETOOTH®** Hands-Free
- Apple CarPlay & Android Auto
- Single-DIN Fit (Double-DIN Adapter Brackets included)
- AM/FM Receiver
- Capacitive Touchscreen
- Switchable US & EU Tuner Frequencies
- Steering Wheel Control Input (*Interface not included)
- RBDS/RDS
- Update via USB
- Multicolor Illumination
- 85 Watts x 4 Channel Amplifier

REAR-VIEW CAMERA

- High Resolution Color Camera
- Low Light Visibility
- Weather Proof
- Wide Angle View
- NTSC Output
- Hidden Mounting Bracket





SDML9ACP

BLUETOOTH® | 340 WATTS
9" MEDIA RECEIVER with Apple CarPlay / Android Auto™

FEATURING 9" (229 mm) CAPACITIVE TOUCHSCREEN AND MULTICOLOR ILLUMINATION OPTIONS



MULTICOLOR ILLUMINATION OPTIONS



PLAYBACK

- High-Resolution FLAC
- WAV/MP3/WMA
- **BLUETOOTH®** Audio Streaming
Stream and Control your Favorite Music APPs

INPUTS & OUTPUTS

- USB Port 1: CarPlay & Android Auto™, 1.5A Charging
- USB Port 2: Media & 1.5A Charging
- **Compatible with Audio Output of iPod®/iPhone®, Smartphones and MP3 players**
- A/V Input
- Front & Rear Camera Input
- 4V Front, Rear, Sub Pre-Amp Outputs
- External BT Mic

GENERAL

- **BLUETOOTH®** Hands-Free
- Apple CarPlay & Android Auto
- Single-DIN Fit (Double-DIN Adapter Brackets included)
- AM/FM Receiver
- Capacitive Touchscreen
- Multicolor Illumination
- Switchable US & EU Tuner Frequencies
- Steering Wheel Control Input (*Interface not included)
- RBDS/RDS
- Update via USB
- 85 Watts x 4 Channel Amplifier

*Steering wheel interface control not applicable with all vehicles.

iPod® and iPhone® are trademarks of Apple, Inc. registered in the U.S. and other countries. Sound Storm Laboratories is not allied with Apple, Inc.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Sound Storm Laboratories is under license. Other trademarks and trade names are those of their respective owners. Android Auto is a trademark of Google LLC.

Use of the Apple CarPlay logo means that a vehicle user interface meets Apple performance standards. Apple is not responsible for the operation of this vehicle or its compliance with safety and regulatory standards. Please note that the use of this product with iPhone may affect wireless performance.





SDML9ACPR

BLUETOOTH® | 340 WATTS

9" MEDIA RECEIVER with Apple CarPlay / Android Auto™ and REAR VIEW CAMERA

FEATURING 9" (229 mm) CAPACITIVE TOUCHSCREEN AND MULTICOLOR ILLUMINATION OPTIONS

INCLUDES MINI LICENSE PLATE CAMERA FEATURING HIDDEN MOUNT



PLAYBACK

- High-Resolution FLAC
- WAV/MP3/WMA
- **BLUETOOTH®** Audio Streaming
Stream and Control your Favorite Music APPs

INPUTS & OUTPUTS

- USB Port 1: CarPlay & Android Auto™, 1.5A Charging
- USB Port 2: Media & 1.5A Charging
- **Compatible with Audio Output of iPod®/iPhone®, Smartphones and MP3 players**
- A/V Input
- Front & Rear Camera Input
- 4V Front, Rear, Sub Pre-Amp Outputs
- External BT Mic

GENERAL

- **BLUETOOTH®** Hands-Free
- Apple CarPlay & Android Auto
- Single-DIN Fit (Double-DIN Adapter Brackets included)
- AM/FM Receiver
- Capacitive Touchscreen
- Multicolor Illumination
- Switchable US & EU Tuner Frequencies
- Steering Wheel Control Input (*Interface not included)
- RBDS/RDS
- Update via USB
- 85 Watts x 4 Channel Amplifier

REAR-VIEW CAMERA

- High Resolution Color Camera
- Low Light Visibility
- Weather Proof
- Wide Angle View
- NTSC Output
- Hidden Mounting Bracket

*Steering wheel interface control not applicable with all vehicles.

iPod® and iPhone® are trademarks of Apple, Inc. registered in the U.S. and other countries. Sound Storm Laboratories is not allied with Apple, Inc.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Sound Storm Laboratories is under license. Other trademarks and trade names are those of their respective owners Android Auto is a trademark of Google LLC.

Use of the Apple CarPlay logo means that a vehicle user interface meets Apple performance standards. Apple is not responsible for the operation of this vehicle or its compliance with safety and regulatory standards. Please note that the use of this product with iPhone may affect wireless performance.





DD988ACP

BLUETOOTH® | 320 WATTS

6.75" MEDIA RECEIVER with Apple CarPlay / Android Auto™

FEATURING 6.75" (171 mm) CAPACITIVE TOUCHSCREEN AND MULTICOLOR ILLUMINATION OPTIONS



MULTICOLOR ILLUMINATION OPTIONS



*Steering wheel interface control not applicable with all vehicles.

iPhone® are registered trademarks of Apple Inc. in the U.S. and other countries. Sound Storm Laboratories is not allied with Apple Inc.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Sound Storm Laboratories is under license. Other trademarks and trade names are those of their respective owners.

Android Auto is a trademark of Google LLC.

Use of the Apple CarPlay logo means that a vehicle user interface meets Apple performance standards. Apple is not responsible for the operation of this vehicle or its compliance with safety and regulatory standards.

Please note that the use of this product with iPhone may affect wireless performance.

PLAYBACK

- High-Resolution FLAC
- WAV/MP3/WMA
- **BLUETOOTH®** Audio Streaming
Stream and Control your Favorite Music APPs

INPUTS & OUTPUTS

- USB Port 1: CarPlay & Android Auto™, 1.5A Charging
- USB Port 2: Media & 1.5A Charging
- **Compatible with Audio Output of iPod®/iPhone®, Smartphones and MP3 players**
- A/V Input
- 4V Front, Rear, Sub Pre-Amp Outputs
- Front & Rear Camera Input
- External BT Mic

GENERAL

- **BLUETOOTH®** Hands-Free
- Wireless Apple CarPlay & Android Auto
- True Double-DIN Fit
- AM/FM Receiver
- Capacitive Touchscreen
- Multicolor Illumination
- Switchable US & EU Tuner Frequencies
- Steering Wheel Control Input (*Interface not included)
- RBDS/RDS
- Update via USB
- 80 Watts x 4 Channel Amplifier





DD999ACPW

BLUETOOTH® | 340 WATTS

7" Media Receiver with WIRELESS Apple CarPlay & Android Auto™

FEATURING 7" (178 mm) CAPACITIVE TOUCHSCREEN
AND MULTICOLOR ILLUMINATION OPTIONS



MULTICOLOR ILLUMINATION OPTIONS



*Steering wheel interface control not applicable with all vehicles.

iPhone® are registered trademarks of Apple Inc. in the U.S. and other countries. Sound Storm Laboratories is not allied with Apple Inc.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Sound Storm Laboratories is under license. Other trademarks and trade names are those of their respective owners.

Android Auto is a trademark of Google LLC.

Use of the Apple CarPlay logo means that a vehicle user interface meets Apple performance standards. Apple is not responsible for the operation of this vehicle or its compliance with safety and regulatory standards.

Please note that the use of this product with iPhone may affect wireless performance.

PLAYBACK

- High-Resolution FLAC
- MP3/WMA
- **BLUETOOTH®** AUDIO STREAMING
Stream and Control your Favorite Music APPs

INPUTS & OUTPUTS

- USB Port: Apple CarPlay & Android Auto™, (2A) Charging
- **Compatible with Audio Output of iPhone, Smartphones and MP3 players**
- Front, Rear, Sub Pre-Amp Outputs
- Front & Rear Camera Input
- External BT Mic

GENERAL

- **BLUETOOTH®** Hands-Free
- Wireless Apple CarPlay & Android Auto
- True Double-DIN Fit
- AM/FM Receiver
- Capacitive Touchscreen
- Multicolor Illumination
- Switchable US & EU Tuner Frequencies
- Steering Wheel Controls (*Interface not included)
- RBDS/RDS
- 85 Watts x 4 Channel Amplifier





DD990ACPW

BLUETOOTH® | 340 WATTS

7" Media Receiver with WIRELESS Apple CarPlay & Android Auto™

FEATURING 7" (178 mm) CAPACITIVE TOUCHSCREEN



PLAYBACK

- High-Resolution FLAC
- WAV/MP3/WMA
- **BLUETOOTH®** AUDIO STREAMING
Stream and Control your Favorite Music APPs

INPUTS & OUTPUTS

- USB Port: Apple CarPlay & Android Auto™, (1.5A) Charging
- USB Port 2: Media & 1.5A Charging
- SD Port
- **Compatible with Audio Output of iPhone, Smartphones and MP3 players**
- A/V Input
- Front & Rear Camera Input
- Front, Rear, Sub Pre-Amp Outputs
- External BT Mic

GENERAL

- **BLUETOOTH®** Hands-Free
- Wireless Apple CarPlay & Android Auto
- True Double-DIN Fit
- AM/FM Receiver
- Capacitive Touchscreen
- Switchable US & EU Tuner Frequencies
- Steering Wheel Control Input (*Interface not included)
- RBDS/RDS
- Update via USB
- 85 Watts x 4 Channel



*Steering wheel interface control not applicable with all vehicles.

iPhone® are registered trademarks of Apple Inc. in the U.S. and other countries. Sound Storm Laboratories is not allied with Apple Inc.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Sound Storm Laboratories is under license. Other trademarks and trade names are those of their respective owners.

Android Auto is a trademark of Google LLC.

Use of the Apple CarPlay logo means that a vehicle user interface meets Apple performance standards. Apple is not responsible for the operation of this vehicle or its compliance with safety and regulatory standards.

Please note that the use of this product with iPhone may affect wireless performance.





DD7CPA

BLUETOOTH® | 340 WATTS
7" MEDIA RECEIVER with Apple CarPlay / Android Auto™

FEATURING 7" (178 mm) CAPACITIVE TOUCHSCREEN



*Steering wheel interface control not applicable with all vehicles.

iPhone® are registered trademarks of Apple Inc. in the U.S. and other countries. Sound Storm Laboratories is not allied with Apple Inc.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Sound Storm Laboratories is under license. Other trademarks and trade names are those of their respective owners.

Android Auto is a trademark of Google LLC.

Use of the Apple CarPlay logo means that a vehicle user interface meets Apple performance standards. Apple is not responsible for the operation of this vehicle or its compliance with safety and regulatory standards. Please note that the use of this product with iPhone may affect wireless performance.

PLAYBACK

- High-Resolution FLAC
- WAV/MP3/WMA
- **BLUETOOTH®** AUDIO STREAMING
Stream and Control your Favorite Music APPs

INPUTS & OUTPUTS

- USB Port 1: CarPlay & Android Auto™, 1.5A Charging
- USB Port 2: Media & 1.5A Charging
- SD Port
- **Compatible with Audio Output of iPod®/iPhone®, Smartphones and MP3 players**
- A/V Input
- Front & Rear Camera Input
- 4V Front, Rear, Sub Pre-Amp Outputs
- External BT Mic

GENERAL

- **BLUETOOTH®** Hands-Free
- Apple CarPlay & Android Auto
- True Double-DIN Fit
- AM/FM Receiver
- Capacitive Touchscreen
- Switchable US & EU Tuner Frequencies
- Steering Wheel Control Input (*Interface not included)
- RBDS/RDS
- Update via USB
- 85 Watts x 4 Channel Amplifier





DD7CPA-C

BLUETOOTH® | 340 WATTS
7" MEDIA RECEIVER with Apple CarPlay / Android Auto™

FEATURING 7" (178 mm) CAPACITIVE TOUCHSCREEN

INCLUDES MINI LICENSE PLATE CAMERA FEATURING HIDDEN MOUNT



PLAYBACK

- High-Resolution FLAC
- WAV/MP3/WMA
- **BLUETOOTH®** AUDIO STREAMING
Stream and Control your Favorite Music APPs

INPUTS & OUTPUTS

- USB Port 1: CarPlay & Android Auto™, 1.5A Charging
- USB Port 2: Media & 1.5A Charging
- SD Port
- **Compatible with Audio Output of iPod®/iPhone®, Smartphones and MP3 players**
- A/V Input
- Front & Rear Camera Input
- 4V Front, Rear, Sub Pre-Amp Outputs
- External BT Mic

GENERAL

- **BLUETOOTH®** Hands-Free
- Apple CarPlay & Android Auto
- True Double-DIN Fit
- AM/FM Receiver
- Capacitive Touchscreen
- Switchable US & EU Tuner Frequencies
- Steering Wheel Control Input (*Interface not included)
- RBDS/RDS
- Update via USB
- 85 Watts x 4 Channel Amplifier

REAR-VIEW CAMERA

- High Resolution Color Camera
- Low Light Visibility
- Weather Proof
- Wide Angle View
- NTSC Output
- Hidden Mounting Bracket

*Steering wheel interface control not applicable with all vehicles.

iPhone® are registered trademarks of Apple Inc. in the U.S. and other countries. Sound Storm Laboratories is not allied with Apple Inc.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Sound Storm Laboratories is under license. Other trademarks and trade names are those of their respective owners.

Android Auto is a trademark of Google LLC.

Use of the Apple CarPlay logo means that a vehicle user interface meets Apple performance standards. Apple is not responsible for the operation of this vehicle or its compliance with safety and regulatory standards. Please note that the use of this product with iPhone may affect wireless performance.





DDCP62

BLUETOOTH® | 320 WATTS
6.2" MULTIMEDIA RECEIVER with Apple CarPlay

FEATURING 6.2" (157 mm) CAPACITIVE TOUCHSCREEN



*Steering wheel interface control not applicable with all vehicles.

iPhone® are registered trademarks of Apple Inc. in the U.S. and other countries. Sound Storm Laboratories is not allied with Apple Inc.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Sound Storm Laboratories is under license. Other trademarks and trade names are those of their respective owners.

Use of the Apple CarPlay logo means that a vehicle user interface meets Apple performance standards. Apple is not responsible for the operation of this vehicle or its compliance with safety and regulatory standards. Please note that the use of this product with iPhone may affect wireless performance.

PLAYBACK

- High-Resolution FLAC
- WAV/MP3/WMA
- **BLUETOOTH®** AUDIO STREAMING
Stream and Control your Favorite Music APPs

INPUTS & OUTPUTS

- USB Port 1: Media & 1.5A Charging
- USB Port 2: CarPlay & 1.5A Charging
- SD Port
- Aux-In
- A/V Input
- **Compatible with Audio Output of iPhone, Smartphones and MP3 players**
- Front & Rear Camera Input
- 4V Front, Rear, Sub Pre-Amp Outputs
- External BT Mic

GENERAL

- **BLUETOOTH®** Hands-Free
- Apple CarPlay
- True Double-DIN Fit
- AM/FM Receiver
- Capacitive Touchscreen
- Switchable US & EU Tuner Frequencies
- Steering Wheel Control Input (*Interface not included)
- RBDS/RDS
- Update via USB
- 80 Watts x 4 Channel Amplifier





DDCP62-R

BLUETOOTH® | 320 WATTS

6.2" MULTIMEDIA RECEIVER with Apple CarPlay and REAR VIEW CAMERA

FEATURING 6.2" (157 mm) CAPACITIVE TOUCHSCREEN

INCLUDES MINI LICENSE PLATE CAMERA FEATURING HIDDEN MOUNT



PLAYBACK

- High-Resolution FLAC
- WAV/MP3/WMA
- **BLUETOOTH®** AUDIO STREAMING
Stream and Control your Favorite Music APPs

INPUTS & OUTPUTS

- USB Port 1: Media & 1.5A Charging
- USB Port 2: CarPlay & 1.5A Charging
- SD Port
- Aux-In
- A/V Input
- **Compatible with Audio Output of iPod®/iPhone®, Smartphones and MP3 players**
- Front & Rear Camera Input
- 4V Front, Rear, Sub Pre-Amp Outputs
- External BT Mic

GENERAL

- **BLUETOOTH®** Hands-Free
- Apple CarPlay
- True Double-DIN Fit
- AM/FM Receiver
- Capacitive Touchscreen
- Switchable US & EU Tuner Frequencies
- Steering Wheel Control Input (*Interface not included)
- RBDS/RDS
- Update via USB
- 80 Watts x 4 Channel Amplifier

REAR-VIEW CAMERA

- High Resolution Color Camera
- Low Light Visibility
- Weather Proof
- Wide Angle View
- NTSC Output
- Hidden Mounting Bracket

*Steering wheel interface control not applicable with all vehicles.

iPhone® are registered trademarks of Apple Inc. in the U.S. and other countries. Sound Storm Laboratories is not allied with Apple Inc.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Sound Storm Laboratories is under license. Other trademarks and trade names are those of their respective owners.

Use of the Apple CarPlay logo means that a vehicle user interface meets Apple performance standards. Apple is not responsible for the operation of this vehicle or its compliance with safety and regulatory standards. Please note that the use of this product with iPhone may affect wireless performance.





DD695B

BLUETOOTH® | 320 WATTS 6.95" DVD/MP3/CD AM/FM RECEIVER

FEATURING 6.95" (177 mm) WIDESCREEN TOUCHSCREEN DIGITAL TFT LCD MONITOR

AND **A-LINK** TO MIRROR YOUR ANDROID SCREEN TO LARGER SCREEN

PLUS MULTICOLOR ILLUMINATION OPTIONS



MULTICOLOR ILLUMINATION OPTIONS



PLAYBACK

- DVD±R/RW Audio & Video
- CD±R/RW Audio
- MP3/WMA
- **BLUETOOTH®** Audio Streaming
Stream and Control your Favorite Music APPs

INPUTS & OUTPUTS

- USB Port
- USB Charging (1A)*
- SD Port
- Aux-In
- **Compatible with Audio Output of iPod®/iPhone®, Smartphones and MP3 Players**
- A/V Input
- Front & Rear Camera Input
- Front, Rear, Sub Pre-Amp Outputs
- Video Output

GENERAL

- **BLUETOOTH®** Hands-Free
- True Double-DIN Fit
- AM/FM Receiver
- Multicolor Illumination
- Wireless Remote Control
- Switchable US & EU Tuner Frequencies
- Steering Wheel Controls (**Interface not included)
- 80 Watts x 4 Channel Amplifier

A-LINK (SCREEN MIRRORING)†

- Download App in Google Play Store to mirror your smartphone screen
- 2-Way Control (Android), USB connection required

*Charging only. Not for mobile device playback. **Steering wheel control not applicable with all vehicles.

iPod® and iPhone® are registered trademarks of Apple Inc. in the U.S. and other countries. Sound Storm Laboratories is not affiliated with Apple Inc.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Sound Storm Laboratories is under license. Other trademarks and trade names are those of their respective owners.

†Supports Android 8.0+ or higher, not all apps are supported. Not compatible with iOS Operating Systems.



SSL®

DD695BR

BLUETOOTH® | 320 WATTS 6.95" DVD/MP3/CD AM/FM RECEIVER

FEATURING 6.95" (177 mm) WIDESCREEN TOUCHSCREEN DIGITAL TFT LCD MONITOR

AND **A-LINK** TO MIRROR YOUR ANDROID SCREEN TO LARGER SCREEN

PLUS MULTICOLOR ILLUMINATION OPTIONS



MULTICOLOR ILLUMINATION OPTIONS



PLAYBACK

- DVD±R/RW Audio & Video
- CD±R/RW Audio
- MP3/WMA
- **BLUETOOTH®** Audio Streaming
Stream and Control your Favorite Music APPs

INPUTS & OUTPUTS

- USB Port
- USB Charging (1A)*
- SD Port
- Aux-In
- **Compatible with Audio Output of iPod®/iPhone®, Smartphones and MP3 Players**
- A/V Input
- Front & Rear Camera Input
- Front, Rear, Sub Pre-Amp Outputs
- Video Output

GENERAL

- **BLUETOOTH®** Hands-Free
- True Double-DIN Fit
- AM/FM Receiver
- Multicolor Illumination
- Wireless Remote Control
- Switchable US & EU Tuner Frequencies
- Steering Wheel Controls (**Interface not included)
- 80 Watts x 4 Channel Amplifier

A-LINK (SCREEN MIRRORING)†

- Download App in Google Play Store to mirror your smartphone screen
- 2-Way Control (Android), USB connection required

*Charging only. Not for mobile device playback. **Steering wheel control not applicable with all vehicles.

iPod® and iPhone® are registered trademarks of Apple Inc. in the U.S. and other countries. Sound Storm Laboratories is not affiliated with Apple Inc.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Sound Storm Laboratories is under license. Other trademarks and trade names are those of their respective owners.

†Supports Android 8.0+ or higher, not all apps are supported. Not compatible with iOS Operating Systems.

SSL®



DDML69B

BLUETOOTH® | 320 WATTS 6.95" MP3-COMPATIBLE DIGITAL MEDIA AM/FM RECEIVER

FEATURING 6.95" (177 mm) WIDESCREEN TOUCHSCREEN DIGITAL TFT LCD MONITOR

AND **A-LINK** TO MIRROR YOUR ANDROID SCREEN TO LARGER SCREEN

PLUS MULTICOLOR ILLUMINATION OPTIONS



MULTICOLOR ILLUMINATION OPTIONS



PLAYBACK

- MP3/WMA
- **BLUETOOTH®** Audio Streaming
Stream and Control your Favorite Music APPs

INPUTS & OUTPUTS

- USB Port
- USB Charging (1A)*
- SD Port
- Aux-In
- **Compatible with Audio Output of iPod®/iPhone®, Smartphones and MP3 Players**
- A/V Input
- Front & Rear Camera Input
- Front, Rear, Sub Pre-Amp Outputs
- Video Output

GENERAL

- **BLUETOOTH®** Hands-Free
- True Double-DIN Fit
- AM/FM Receiver
- Multicolor Illumination
- Wireless Remote Control
- Switchable US & EU Tuner Frequencies
- Steering Wheel Controls (**Interface not included)
- 80 Watts x 4 Channel Amplifier

A-LINK (SCREEN MIRRORING)†

- Download App in Google Play Store to mirror your smartphone screen
- 2-Way Control (Android), USB connection required

*Charging only. Not for mobile device playback. **Steering wheel control not applicable with all vehicles.

iPod® and iPhone® are registered trademarks of Apple Inc. in the U.S. and other countries. Sound Storm Laboratories is not affiliated with Apple Inc.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Sound Storm Laboratories is under license. Other trademarks and trade names are those of their respective owners.

†Supports Android 8.0+ or higher, not all apps are supported. Not compatible with iOS operating systems.



SSL

DDML69BR

BLUETOOTH® | 320 WATTS 6.95" MP3-COMPATIBLE DIGITAL MEDIA AM/FM RECEIVER

FEATURING 6.95" (177 mm) WIDESCREEN TOUCHSCREEN DIGITAL TFT LCD MONITOR

AND **A-LINK** TO MIRROR YOUR ANDROID SCREEN TO LARGER SCREEN

PLUS REAR-VIEW LICENSE PLATE MOUNT CAMERA & MULTICOLOR ILLUMINATION OPTIONS



MULTICOLOR ILLUMINATION OPTIONS



*Charging only. Not for mobile device playback. **Steering wheel control not applicable with all vehicles.

iPod® and iPhone® are registered trademarks of Apple Inc. in the U.S. and other countries. Sound Storm Laboratories is not affiliated with Apple Inc.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Sound Storm Laboratories is under license. Other trademarks and trade names are those of their respective owners.

†Supports Android 8.0+ or higher, not all apps are supported. Not compatible with iOS operating systems.

PLAYBACK

- MP3/WMA
- **BLUETOOTH®** Audio Streaming
Stream and Control your Favorite Music APPs

INPUTS & OUTPUTS

- USB Port
- USB Charging (1A)*
- SD Port
- Aux-In
- **Compatible with Audio Output of iPod®/iPhone®, Smartphones and MP3 Players**
- A/V Input
- Front & Rear Camera Input
- Front, Rear, Sub Pre-Amp Outputs
- Video Output

GENERAL

- **BLUETOOTH®** Hands-Free
- True Double-DIN Fit
- AM/FM Receiver
- Multicolor Illumination
- Wireless Remote Control
- Switchable US & EU Tuner Frequencies
- Steering Wheel Controls (**Interface not included)
- 80 Watts x 4 Channel Amplifier

A-LINK (SCREEN MIRRORING)†

- Download App in Google Play Store to mirror your smartphone screen
- 2-Way Control (Android), USB connection required

REAR-VIEW CAMERA

- High Resolution Color Camera
- Low Light Visibility
- Weather Proof
- Wide Angle View
- NTSC Output
- Hidden Mounting Bracket

SSL



DD667B

BLUETOOTH® | 320 WATTS 6.2" DVD/MP3/CD AM/FM RECEIVER

FEATURING 6.2" (157 mm) WIDESCREEN TOUCHSCREEN DIGITAL TFT LED MONITOR
AND A-LINK TO MIRROR YOUR ANDROID SCREEN TO LARGER SCREEN



PLAYBACK

- DVD±R/RW Audio & Video
- CD±R/RW Audio
- MP3/WMA
- **BLUETOOTH®** Audio Streaming
Stream and Control your Favorite Music APPs

INPUTS & OUTPUTS

- USB Port
- USB Charging (1A)*
- SD Port
- Aux-In
- **Compatible with Audio Output of iPod®/iPhone®, Smartphones and MP3 Players**
- A/V Input
- Front, Rear, Sub Pre-Amp Outputs
- Video Output
- Front & Rear Camera Input

GENERAL

- **BLUETOOTH®** Hands-Free
- True Double DIN Fit
- AM/FM Receiver
- Switchable US & Europe Tuner Frequencies
- Steering Wheel Controls
(*Interface module not included)
- 80 Watts x 4 Channel Amplifier

A-LINK (SCREEN MIRRORING)†

- Download App in Google Play Store to mirror your smartphone screen
- 2-Way Control (Android), USB connection required

*Charging only. Not for mobile device playback.

**Steering wheel interface control not applicable with all vehicles.

iPod® and iPhone® are trademarks of Apple, Inc. registered in the U.S. and other countries. Sound Storm Laboratories is not affiliated with Apple, Inc.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Sound Storm Laboratories is under license. Other trademarks and trade names are those of their respective owners.





DD664B

BLUETOOTH® | 320 WATTS
6.2" DVD/MP3/CD AM/FM RECEIVER

FEATURING 6.2" (157 mm) WIDESCREEN TOUCHSCREEN DIGITAL TFT LED MONITOR



WIRELESS REMOTE CONTROL



PLAYBACK

- DVD±R/RW Audio & Video
- CD±R/RW Audio
- MP3/WMA
- **BLUETOOTH®** Audio Streaming
Stream and Control your Favorite Music APPs

INPUTS & OUTPUTS

- USB Port
- USB Charging (1A)*
- SD Port
- Aux-In
- **Compatible with Audio Output of iPod®/iPhone®, Smartphones and MP3 Players**
- A/V Input
- Front & Rear Camera Input
- Front, Rear, Sub Pre-Amp Outputs
- Video Output

GENERAL

- **BLUETOOTH®** Hands-Free
- True Double DIN Fit
- AM/FM Receiver
- Wireless Remote Control
- Switchable US & Europe Tuner Frequencies
- Steering Wheel Controls (**Interface module not included)
- 80 Watts x 4 Channel Amplifier

*Charging only. Not for mobile device playback.

**Steering wheel interface control not applicable with all vehicles.

iPod® and iPhone® are trademarks of Apple, Inc. registered in the U.S. and other countries. Sound Storm Laboratories is not allied with Apple, Inc.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Sound Storm Laboratories is under license. Other trademarks and trade names are those of their respective owners.





DD764BR

BLUETOOTH® | 320 WATTS
6.2" DVD/MP3/CD AM/FM RECEIVER

FEATURING 6.2" (157 mm) WIDESCREEN TOUCHSCREEN DIGITAL TFT LED MONITOR
PLUS REAR-VIEW LICENSE PLATE MOUNT CAMERA



PLAYBACK

- DVD±R/RW Audio & Video
- CD±R/RW Audio
- MP3/WMA
- **BLUETOOTH®** Audio Streaming
Stream and Control your Favorite Music APPs

INPUTS & OUTPUTS

- USB Port
- USB Charging (1A)*
- SD Port
- Aux-In
- **Compatible with Audio Output of iPod®/iPhone®, Smartphones and MP3 Players**
- A/V Input
- Front & Rear Camera Input
- Front, Rear, Sub Pre-Amp Outputs
- Video Output

GENERAL

- **BLUETOOTH®** Hands-Free
- True Double-DIN Fit
- AM/FM Receiver
- Wireless Remote Control
- Switchable US & EU Tuner Frequencies
- Steering Wheel Controls (**Interface not included)
- 80 Watts x 4 Channel Amplifier

REAR-VIEW LICENSE PLATE MOUNT CAMERA

- High Resolution Wide Angle Camera
- On-screen Display Distance Guide
- Low Light Visibility - Weather Proof
- NTSC Output

*Charging only. Not for mobile device playback. **Steering wheel control not applicable with all vehicles.

iPod® and iPhone® are registered trademarks of Apple Inc. in the U.S. and other countries. Sound Storm Laboratories is not affiliated with Apple Inc.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Sound Storm Laboratories is under license. Other trademarks and trade names are those of their respective owners.

†Supports Android 8.0+ or higher, not all apps are supported.





SD726MB

BLUETOOTH® | 340 WATTS
7" DVD/MP3/CD AM/FM RECEIVER

FEATURING 7" (178 mm) MOTORIZED WIDESCREEN TOUCHSCREEN DIGITAL TFT LCD MONITOR



PLAYBACK

- DVD±R/RW Audio & Video
- CD±R/RW Audio
- WMA
- **BLUETOOTH®** Audio Streaming
Stream and Control your Favorite Music APPs

INPUTS & OUTPUTS

- USB Port
- USB Charging (1A)*
- SD Port
- Aux-In
- **Compatible with Audio Output of iPod®/iPhone®, Smartphones and MP3 Players**
- A/V Input
- Rear Camera Input
- Front, Rear, Sub Pre-Amp Outputs
- Video Output

GENERAL

- **BLUETOOTH®** Hands-Free
- Single-DIN Fit
- AM/FM Receiver
- Wireless Remote Control
- Detachable Front Panel
- Switchable US & Europe Tuner Frequencies
- Steering Wheel Controls (**Interface module not included)
- 85 Watts x 4 Channel Amplifier

* Steering wheel interface control not applicable with all vehicles.

iPod® and iPhone® are trademarks of Apple, Inc. registered in the U.S. and other countries. Sound Storm Laboratories is not affiliated with Apple, Inc.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Sound Storm Laboratories is under license. Other trademarks and trade names are those of their respective owners.






DDC28B

BLUETOOTH® | 320 WATTS
CD/MP3-COMPATIBLE AM/FM RECEIVER



DETACHABLE FRONT PANEL



WIRELESS
REMOTE CONTROL

PLAYBACK

- CD±R/RW Audio
- MP3
- **Bluetooth®** Audio Streaming
Stream and Control your Favorite Music APPs

INPUTS & OUTPUTS

- USB Port
- USB Charging (1A)*
- Aux-In
- **Compatible with Audio Output of iPod®/iPhone®, Smartphones and MP3 Players**
- Front, Rear, Sub Pre-Amp Outputs

GENERAL

- **Bluetooth®** Hands-free
- True Double-DIN Fit
- AM/FM Receiver
- Detachable Front Panel
- Wireless Remote Control
- Push-To-Talk
- Switchable US & EU Tuner Frequencies
- 80 Watts x 4 Channel Amplifier



*Charging only. Not for mobile device playback.

iPod® and iPhone® are registered trademarks of Apple Inc. in the U.S. and other countries. Sound Storm Laboratories is not affiliated with Apple Inc.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Sound Storm Laboratories is under license. Other trademarks and trade names are those of their respective owners.





DDML28B

BLUETOOTH® | 240 WATTS
MP3-COMPATIBLE DIGITAL MEDIA AM/FM RECEIVER



DETACHABLE FRONT PANEL



WIRELESS
REMOTE CONTROL

PLAYBACK

- MP3/WMA
- **BLUETOOTH®** Audio Streaming
Stream and Control your Favorite Music APPs

INPUTS & OUTPUTS

- USB Port
- USB Charging (1A)*
- Aux-In
- Compatible with Audio Output of iPod®/iPhone®, Smartphones and MP3 Players
- Front & Rear Pre-Amp Outputs

GENERAL

- **BLUETOOTH®** Hands-Free
- True Double-DIN Fit
- AM/FM Receiver
- Push-To-Talk
- Detachable Front Panel
- Wireless Remote Control
- Switchable US & Europe Tuner Frequencies
- 60 Watts x 4 Channel Amplifier



*Charging only. Not for mobile device playback.

iPod® and iPhone® are registered trademarks of Apple Inc. in the U.S. and other countries. Sound Storm Laboratories is not affiliated with Apple Inc.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Sound Storm Laboratories is under license. Other trademarks and trade names are those of their respective owners.





SDC26B

BLUETOOTH® | 200 WATTS
MP3-COMPATIBLE CD AM/FM RECEIVER



PLAYBACK

- CD±R/RW Audio
- MP3/WMA
- **BLUETOOTH®** Audio Streaming
Stream and Control your Favorite Music APPs

INPUTS & OUTPUTS

- USB Port
- USB Charging (1A)*
- Aux-In
- **Compatible with Audio Output of iPod®/iPhone®, Smartphones and MP3 Players**
- Front & Rear Pre-Amp Outputs

GENERAL

- **BLUETOOTH®** Hands-Free
- Single-DIN Fit
- AM/FM Receiver
- Wireless Remote Control
- Switchable US & Europe Tuner Frequencies
- 50 Watts x 4 Channel Amplifier

*Charging only. Not for mobile device playback.

iPod® and iPhone® are trademarks of Apple, Inc. registered in the U.S. and other countries. Sound Storm Laboratories is not allied with Apple, Inc.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Sound Storm Laboratories is under license. Other trademarks and trade names are those of their respective owners.





ML46DB

BLUETOOTH® | 200 WATTS
MP3-COMPATIBLE DIGITAL MEDIA AM/FM RECEIVER



*Charging only. Not for mobile device playback.

iPod® and iPhone® are trademarks of Apple, Inc. registered in the U.S. and other countries. Sound Storm Laboratories is not affiliated with Apple, Inc.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Sound Storm Laboratories is under license. Other trademarks and trade names are those of their respective owners.

PLAYBACK

- MP3/WMA
- **BLUETOOTH®** Audio Streaming
Stream and Control your Favorite Music APPs

INPUTS & OUTPUTS

- USB Port
- USB Charging (1A)*
- Aux-In
- **Compatible with Audio Output of iPod®/iPhone®, Smartphones and MP3 Players**
- Front & Rear Pre-Amp Outputs

GENERAL

- **BLUETOOTH®** Hands-Free
- Single-DIN Fit
- AM/FM Receiver
- Push-To-Talk
- Detachable Front Panel
- Wireless Remote Control
- Switchable US & EU Tuner Frequencies
- 50 Watts x 4 Channel Amplifier





ML43B

BLUETOOTH® | 200 WATTS
MP3-COMPATIBLE DIGITAL MEDIA AM/FM RECEIVER



*Charging only. Not for mobile device playback.

iPod® and iPhone® are trademarks of Apple, Inc. registered in the U.S. and other countries. Sound Storm Laboratories is not affiliated with Apple, Inc.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Sound Storm Laboratories is under license. Other trademarks and trade names are those of their respective owners.

PLAYBACK

- MP3/WMA
- **BLUETOOTH®** Audio Streaming
Stream and Control your Favorite Music APPs

INPUTS & OUTPUTS

- USB Port
- USB Charging (1A)*
- SD Port
- Aux-In
- **Compatible with Audio Output of iPod®/iPhone®, Smartphones and MP3 Players**
- Front & Rear Pre-Amp Outputs

GENERAL

- **BLUETOOTH®** Hands-Free
- Single-DIN Fit
- AM/FM Receiver
- Push-To-Talk
- Switchable US & EU Tuner Frequencies
- Wireless Remote Control
- 50 Watts x 4 Channel Amplifier





ML41B

BLUETOOTH® | 200 WATTS
MP3-COMPATIBLE DIGITAL MEDIA FM RECEIVER



WIRELESS
REMOTE CONTROL



PLAYBACK

- MP3/WMA
- **BLUETOOTH®** Audio Streaming
Stream and Control your Favorite Music APPs

INPUTS & OUTPUTS

- USB Port
- USB Charging (1A)*
- Aux-In
- Compatible with Audio Output of iPod®/iPhone®, Smartphones and MP3 Players
- Front & Rear Pre-Amp Outputs

GENERAL

- **BLUETOOTH®** Hands-Free
- Single-DIN Fit
- FM Receiver
- Push-To-Talk
- Switchable US & EU Tuner Frequencies
- Wireless Remote Control
- 50 Watts x 4 Channel Amplifier

*Charging only. Not for mobile device playback.


iPod® and iPhone® are trademarks of Apple, Inc. registered in the U.S. and other countries. Sound Storm Laboratories is not allied with Apple, Inc.
The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Sound Storm Laboratories is under license.
Other trademarks and trade names are those of their respective owners.





SRC50

MINI REAR-VIEW FLUSH MOUNT CAMERA
INCLUDES FLUSH MOUNT AND HANGING MOUNT



FLUSH MOUNT HARDWARE



HANGING MOUNT HARDWARE

FEATURES

- High Resolution Color Camera
- On-screen Display Distance Guide
- Low Light Visibility
- Weather Proof
- Wide Angle View
- NTSC Output

The SSL logo is displayed in white on a yellow square background in the top left corner of the page.

SLC60

LICENSE PLATE MOUNT REAR VIEW CAMERA



FEATURES

- High Resolution Color Camera
- On-screen Display Distance Guide
- Low Light Visibility
- Weather Proof
- Wide Angle View
- NTSC Output


Measures: 10-7/8" (276 mm) L x 7/8" (22 mm) W x 7/8" (22 mm) H

The SSL logo is displayed in white on a yellow background in the bottom right corner of the page.



CG12D

1200 WATTS | 12" (305 mm) HIGH POWER
DUAL 4 Ω VOICE COIL SUBWOOFER

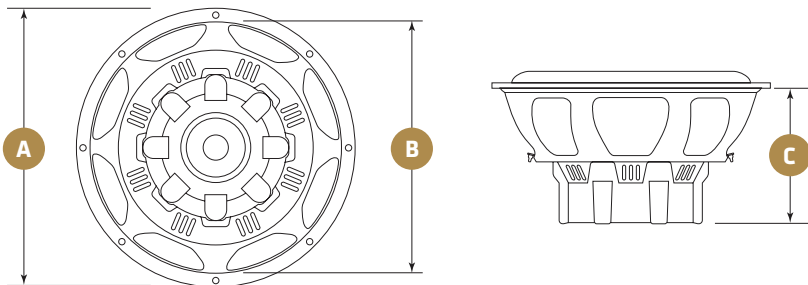

FEATURES

- Foam Surround
- Double Stitched Surround
- Polypropylene Cone
- Stamped Steel Basket
- Dual High Temperature Voice Coils

SPECIFICATIONS

- Max Power: 1200 W
- Nominal Impedance: Dual 4 Ω
- Sensitivity (1 W/1 m): 88 dB

DIMENSIONS



- A: Overall Diameter: 12.36" / 314 mm
- B: Mounting Hole Diameter: 11.25" / 286 mm
- C: Mounting Depth: 5.4" / 137 mm





CG10D

1000 WATTS | 10" (254 mm) HIGH POWER
DUAL 4 Ω VOICE COIL SUBWOOFER

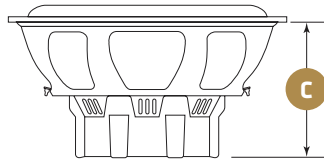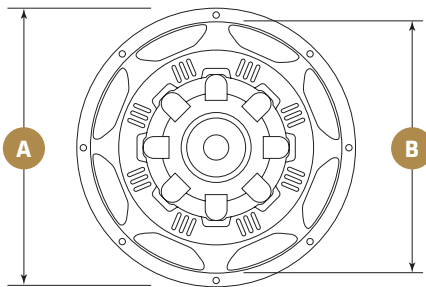

FEATURES

- Foam Surround
- Double Stitched Surround
- Polypropylene Cone
- Stamped Steel Basket
- Dual High Temperature Voice Coils

SPECIFICATIONS

- Max Power: 1000 W
- Nominal Impedance: Dual 4 Ω
- Sensitivity (1 W/1 m): 88 dB

DIMENSIONS



- A: Overall Diameter: 10.2" / 259 mm
- B: Mounting Hole Diameter: 9.13" / 232 mm
- C: Mounting Depth: 4.76" / 121 mm





CG8D

800 WATTS | 8" (203 mm) HIGH POWER
DUAL 4 Ω VOICE COIL SUBWOOFER

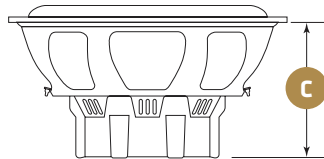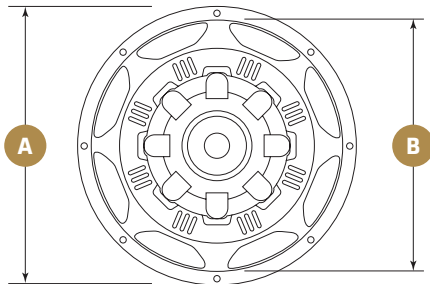

FEATURES

- Foam Surround
- Double Stitched Surround
- Polypropylene Cone
- Stamped Steel Basket
- Dual High Temperature Voice Coils

SPECIFICATIONS

- Max Power: 800 W
- Nominal Impedance: Dual 4 Ω
- Sensitivity (1 W/1 m): 87 dB

DIMENSIONS



- A: Overall Diameter: 8.3" / 211 mm
- B: Mounting Hole Diameter: 7.3" / 185 mm
- C: Mounting Depth: 3.7" / 94 mm





SS12

800 WATTS | 12" (305 mm) SINGLE 4 Ω
VOICE COIL HIGH POWER SUBWOOFER

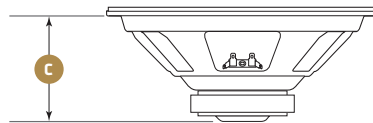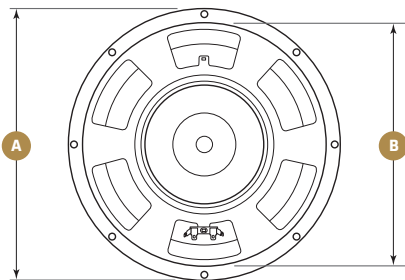

FEATURES

- Foam Surround
- Polypropylene Cone
- Stamped Steel Basket

SPECIFICATIONS

- Max Power: 800 W
- Nominal Impedance: 4 Ω
- Sensitivity (1 W/1 m): 89 dB

DIMENSIONS



- A: Overall Diameter: 12.25" / 311 mm
- B: Mounting Hole Diameter: 11.0" / 279 mm
- C: Mounting Depth: 4.88" / 124 mm





SS10

600 WATTS | 10" (254 mm) SINGLE Ω
VOICE COIL HIGH POWER SUBWOOFER

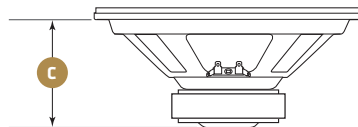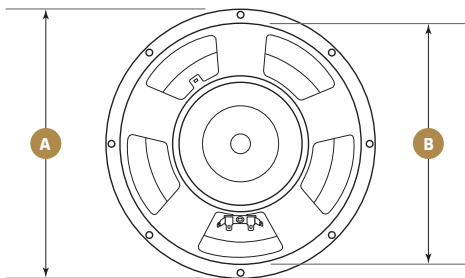

FEATURES

- Foam Surround
- Polypropylene Cone
- Stamped Steel Basket

SPECIFICATIONS

- Max Power: 600 W
- Nominal Impedance: 4 Ω
- Sensitivity (1 W/1 m): 88 dB

DIMENSIONS



- A: Overall Diameter: 10.13" / 257 mm
- B: Mounting Hole Diameter: 9.17" / 233 mm
- C: Mounting Depth: 4.13" / 105 mm





SS8

400 WATTS | 8" (203 mm) SINGLE 4 Ω
VOICE COIL HIGH POWER SUBWOOFER

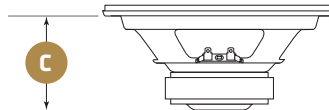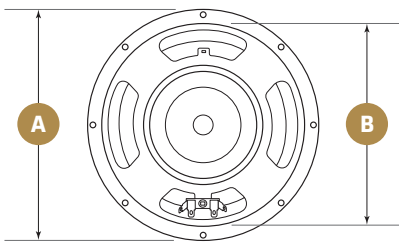

FEATURES

- Foam Surround
- Polypropylene Cone
- Stamped Steel Basket

SPECIFICATIONS

- Max Power: 400 W
- Nominal Impedance: 4 Ω
- Sensitivity (1 W/1 m): 87 dB

DIMENSIONS

- A: Overall Diameter: 8.25" / 210 mm
- B: Mounting Hole Diameter: 7.17" / 182 mm
- C: Mounting Depth: 3.44" / 88 mm





LoPro10

1200 WATTS | 10" (254 mm) LOW PROFILE
AMPLIFIED SUBWOOFER WITH ENCLOSURE (SOLD SINGLE)



FEATURES

- Class A/B Topology
- PWM MOSFET Power Supply
- RCA & Speaker Level Inputs
- Low Pass Filter
- Subsonic Filter
- Bass Boost
- Phase Control
- Remote Subwoofer Control
- LED Status Indicator
- Thermal, Short and Overload Protection Circuits

SPECIFICATIONS

- Max Power: 1200 W
- Nominal Impedance: 4Ω
- Sensitivity (1 W/1 m): 88 dB
- Frequency Response 15Hz to 150Hz

DIMENSIONS


- A: Width: 11.19" / 284 mm
- B: Length: 15.16" / 385 mm
- C: Height: 2.95" / 75 mm



REMOTE
SUBWOOFER CONTROL



10" LOW PROFILE AMPLIFIED SUBWOOFER END PANEL DETAIL

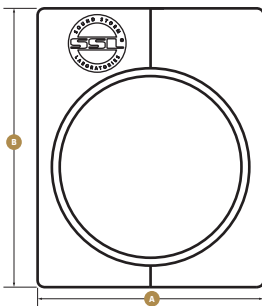



LoPro8

600 WATTS | 8" (203 mm) LOW PROFILE
AMPLIFIED SUBWOOFER WITH ENCLOSURE (SOLD SINGLE)



FEATURES

- Class A/B Topology
- PWM MOSFET Power Supply
- RCA & Speaker Level Inputs
- Low Pass Filter
- Subsonic Filter
- Bass Boost
- Phase Control
- Remote Subwoofer Control
- LED Status Indicator
- Thermal, Short and Overload Protection Circuits

SPECIFICATIONS

- Max Power: 600 W
- Nominal Impedance: 4Ω
- Sensitivity (1 W/1 m): 88 dB
- Frequency Response 15Hz to 150Hz

DIMENSIONS


- A: Width: 9.69" / 247 mm
- B: Length: 14.75" / 375 mm
- C: Height: 2.95" / 75 mm



REMOTE
SUBWOOFER CONTROL



8" LOW PROFILE AMPLIFIED SUBWOOFER END PANEL DETAIL

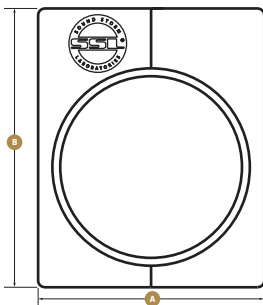



US10


1000 WATTS | 10" (254 mm) LOW PROFILE
AMPLIFIED SUBWOOFER SYSTEM WITH ENCLOSURE (SOLD SINGLE)



10" LOW PROFILE AMPLIFIED SUBWOOFER END PANEL DETAIL



REMOTE SUBWOOFER CONTROL

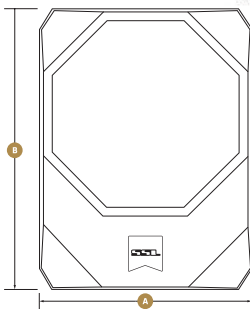

FEATURES

- Rubber Surround
- Aluminum Cone
- Low Profile 10"
- Class A/B Topology
- PWM MOSFET Power Supply
- RCA & Speaker Level Inputs
- Low Pass Filter
- Bass Boost
- Phase Control
- Remote Subwoofer Control
- LED Status Indicator
- Thermal, Short and Overload Protection Circuits

SPECIFICATIONS

- Max Power: 1000 W
- Nominal Impedance: 2.6 Ω
- Sensitivity (1 W/1 m): 68 dB
- Frequency Response 20Hz to 150Hz

DIMENSIONS

A: Width: 10.43" / 265 mm

B: Length: 13.58" / 345 mm

C: Height: 3.15" / 80 mm





US10K

1000 WATTS | 10" (254 mm) LOW PROFILE AMPLIFIED SUBWOOFER
PLUS 8 GAUGE AMPLIFIER INSTALLATION KIT




8 GAUGE AMPLIFIER INSTALLATION KIT



10" LOW PROFILE AMPLIFIED SUBWOOFER END PANEL DETAIL



REMOTE SUBWOOFER CONTROL

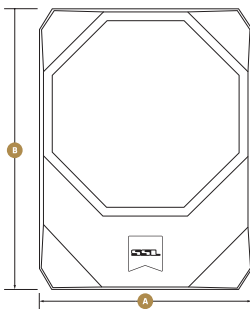

FEATURES

- Rubber Surround
- Aluminum Cone
- Low Profile 10"
- Class A/B Topology
- PWM MOSFET Power Supply
- RCA & Speaker Level Inputs
- Low Pass Filter
- Bass Boost
- Phase Control
- Remote Subwoofer Control
- LED Status Indicator
- Thermal, Short and Overload Protection Circuits

SPECIFICATIONS

- Max Power: 1000 W
- Nominal Impedance: 2.6 Ω
- Sensitivity (1 W/1 m): 68 dB
- Frequency Response 20Hz to 150Hz

DIMENSIONS

A: Width: 10.43" / 265 mm

B: Length: 13.58" / 345 mm

C: Height: 3.15" / 80 mm

INSTALLATION KIT FEATURES

- 17 ft. 8 Gauge Red Power Cable
- Competition High-Quality 40 Amp Fuse Holder
- 3 ft. 8 Gauge Black Ground Cable
- 16 ft. 18 Gauge Blue Remote Cable
- 16 ft. High Performance RCA Interconnect
- (7) 4" Wire Ties
- (1) Plastic Grommet
- (1) #10 Gold-Plated Ring Terminal
- (1) Butt Splice Wire Connectors
- (1) Tap Screw
- (1) Large Black Rubber Terminal Boot





US8


800 WATTS | 8" (203 mm) LOW PROFILE
AMPLIFIED SUBWOOFER SYSTEM WITH ENCLOSURE (SOLD SINGLE)



8" LOW PROFILE AMPLIFIED SUBWOOFER END PANEL DETAIL



REMOTE SUBWOOFER CONTROL

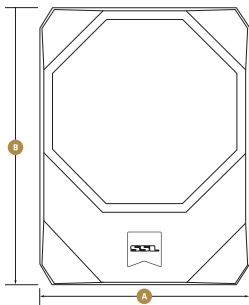

FEATURES

- High Performance Voice Coil
- Rubber Surround
- Aluminum Cone
- Low Profile 8"
- Class A/B Topology
- PWM MOSFET Power Supply
- RCA & Speaker Level Inputs
- Low Pass Filter
- Bass Boost
- Phase Control
- Remote Subwoofer Control
- LED Status Indicator
- Thermal, Short and Overload Protection Circuits

SPECIFICATIONS

- Max Power: 800 W
- Nominal Impedance: 3.6 Ω
- Sensitivity (1 W/1 m): 57 dB
- Frequency Response 20Hz to 150Hz

DIMENSIONS

- A: Width: 9.06" / 230 mm
- B: Length: 11.81" / 300 mm
- C: Height: 3.11" / 79 mm





US8K

800 WATTS | 8" (203 mm) LOW PROFILE AMPLIFIED SUBWOOFER
PLUS 8 GAUGE AMPLIFIER INSTALLATION KIT




8 GAUGE AMPLIFIER INSTALLATION KIT



8" LOW PROFILE AMPLIFIED SUBWOOFER END PANEL DETAIL



REMOTE SUBWOOFER CONTROL

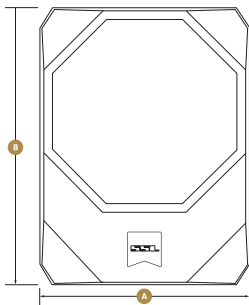

FEATURES

- High Performance Voice Coil
- Rubber Surround
- Aluminum Cone
- Low Profile 8"
- Class A/B Topology
- PWM MOSFET Power Supply
- RCA & Speaker Level Inputs
- Low Pass Filter
- Bass Boost
- Phase Control
- Remote Subwoofer Control
- LED Status Indicator
- Thermal, Short and Overload Protection Circuits

SPECIFICATIONS

- Max Power: 800 W
- Nominal Impedance: 3.6 Ω
- Sensitivity (1 W/1 m): 57 dB
- Frequency Response 20Hz to 150Hz

DIMENSIONS

- A: Width: 9.06" / 230 mm
- B: Length: 11.81" / 300 mm
- C: Height: 3.11" / 79 mm

INSTALLATION KIT FEATURES




- 17 ft. 8 Gauge Red Power Cable
- Competition High-Quality 40 Amp Fuse Holder
- 3 ft. 8 Gauge Black Ground Cable
- 16 ft. 18 Gauge Blue Remote Cable
- 16 ft. High Performance RCA Interconnect
- (7) 4" Wire Ties
- (1) Plastic Grommet
- (1) #10 Gold-Plated Ring Terminal
- (1) Butt Splice Wire Connectors
- (1) Tap Screw
- (1) Large Black Rubber Terminal Boot





PB10

600 WATTS | 10" (254 mm) AMPLIFIED SUBWOOFER
FEATURING BUILT-IN HIGH POWER AMPLIFIER AND 10" PASSIVE RADIATOR



FEATURES

- RCA & Speaker Level Inputs
- Phase Control
- Bass Boost
- Low Pass Filter
- Class D Topology
- Subsonic Filter
- Remote Subwoofer Control
- LED Status Indicator
- Thermal, Short and Overload Protection Circuits

SUBWOOFER FEATURES

- High Performance Voice Coil
- Nitrile Rubber Surround
- Aluminum Cone
- Side loaded 10" Subwoofer / 10" Passive Radiator with Class D Amplifier
- Input Sensitivity Selector: 0.2V-6V
- 0 to +12dB Variable Bass Boost
- MDF Sealed Enclosure

DIMENSIONS

A: Width: 13.38" (340 mm)

B: Length: 10.62" (270 mm)

C: Height: 11.41" (290 mm)

D: Width: 9.96" (253 mm)





PB8

400 WATTS | 8" (203 mm) AMPLIFIED SUBWOOFER

FEATURING BUILT-IN HIGH POWER AMPLIFIER AND 8" PASSIVE RADIATOR



FEATURES


- RCA & Speaker Level Inputs
- Phase Control
- Bass Boost
- Low Pass Filter
- Class D Topology
- Subsonic Filter
- Remote Subwoofer Control
- LED Status Indicator
- Thermal, Short and Overload Protection Circuits

SUBWOOFER FEATURES


- High Performance Voice Coil
- Nitrile Rubber Surround
- Aluminum Cone
- Side loaded 8" Subwoofer / 8" Passive Radiator with Class D Amplifier
- Input Sensitivity Selector: 0.2V-6V
- 0 to +12dB Variable Bass Boost
- MDF Sealed Enclosure

DIMENSIONS


- A: Width: 11.53" / 293 mm
- B: Length: 9.25" (235 mm)
- C: Height: 9.84" (250 mm)
- D: Width: 8.70" (221 mm)



FRONT



SIDE





REAR





CG65C

350 WATTS | 6.5" (165 mm)
2-WAY COMPONENT SPEAKER SYSTEM

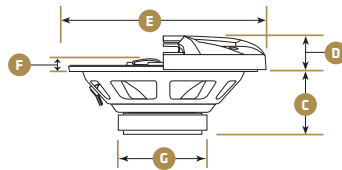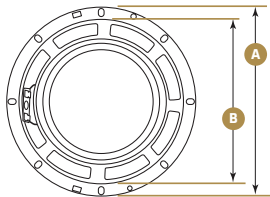

GENERAL

- 2-Way 6.5" Component Speaker System
- Rubber Surround
- Polypropylene Cone
- Stamped Steel Basket
- 1" (25 mm) Tweeter
- Custom Grille
- Sold in Pairs

SPECIFICATIONS

- Max Power: 350 W
- Nominal Impedance: 4 Ω
- Frequency Response: 75 Hz-20 kHz
- System Sensitivity (1 W/1 m): 90 dB
- 6dB/Oct High-Pass Filter

DIMENSIONS



- A: Overall Diameter: 6.5" / 166 mm
- B: Installation Hole Diameter: 5.67" / 144 mm
- C: Mounting Depth: 2.28" / 58 mm
- D: Grill Protrusion: 0.98" / 25 mm
- E: Overall Speaker w/Grill: 7.05" / 179 mm
- F: Outer Motor Diameter: 3.15" / 80 mm





CG693

500 WATTS | 6" x 9" (152 x 229 mm)
3-WAY LOUDSPEAKERS (1 PAIR)

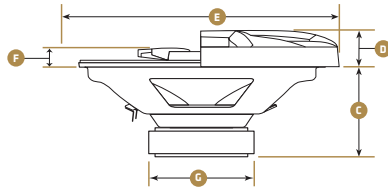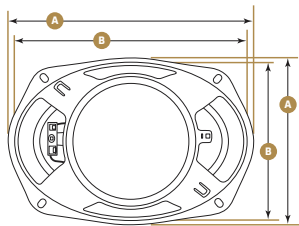

GENERAL

- 3-Way System
- Rubber Surround
- Poly Injection Cone
- High Temperature Voice Coil
- Stamped Steel Basket
- 1" (25 mm) Midrange
- 0.5" (13 mm) Dome Tweeter

SPECIFICATIONS

- Max Power: 500 W
- Nominal Impedance: 4 Ω
- Frequency Response: 65 Hz to 20 kHz
- System Sensitivity (1 W/1 m): 88 dB

DIMENSIONS



- A: Overall Diameter: 9.29" x 6.42" / 236 x 163 mm
- B: Installation Hole Diameter:
8.74" x 5.98" / 222 x 152 mm
- C: Mounting Depth: 3.3" / 84 mm
- D: Grill Protrusion: 1.22" / 31 mm
- E: Overall Speaker w/Grill:
10.34" x 7.2" / 264 x 183 mm
- F: Tweeter Protrusion: 0.71" / 18 mm
- G: Outer Motor Diameter: 3.94" / 100 mm





CG653

325 WATTS | 6.5" (165 mm)
3-WAY LOUDSPEAKERS (1 PAIR)

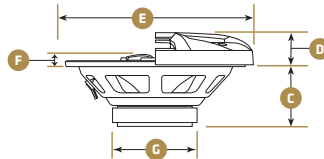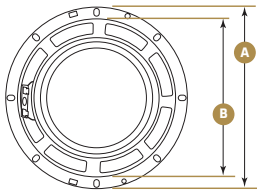

GENERAL

- 3-Way System
- Rubber Surround
- Poly Injection Cone
- High Temperature Voice Coil
- Stamped Steel Basket
- 25 mm Midrange
- 13 mm Dome Tweeter

SPECIFICATIONS

- Max Power: 325 W
- Nominal Impedance: 4 Ω
- Frequency Response: 75 Hz-20 kHz
- System Sensitivity (1 W/1 m): 88 dB

DIMENSIONS



- A: Overall Diameter: 6.5" x 6.5" / 166 x 166 mm
- B: Installation Hole Diameter:
5.75" x 5.75" / 146 x 146 mm
- C: Mounting Depth: 2.17" / 55 mm
- D: Grill Protrusion: 0.94" / 24 mm
- E: Overall Speaker w/Grill:
7.05" x 7.05" / 179 x 179 mm
- F: Tweeter Protrusion: 0.39" / 10 mm
- G: Outer Motor Diameter: 3.15" / 80 mm





CG553

250 WATTS | 5.25" (133 mm)
3-WAY LOUDSPEAKERS (1 PAIR)

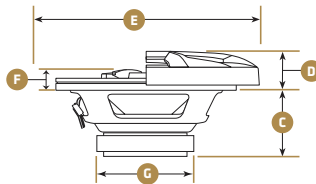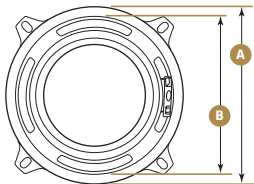

GENERAL

- 3-Way System
- Rubber Surround
- Poly Injection Cone
- High Temperature Voice Coil
- Stamped Steel Basket
- 1" (25 mm) Midrange
- 0.5" (13 mm) Dome Tweeter

SPECIFICATIONS

- Max Power: 250 W
- Nominal Impedance: 4 Ω
- Frequency Response: 90 Hz to 20 kHz
- System Sensitivity (1 W/1 m): 85 dB

DIMENSIONS



- A: Overall Diameter: 5.08" x 5.08" / 129 x 129 mm
- B: Installation Hole Diameter:
4.49" x 4.49" / 114 x 114 mm
- C: Mounting Depth: 1.89" / 48 mm
- D: Grill Protrusion: 0.91" / 23 mm
- E: Overall Speaker w/Grill:
6.26" x 6.26" / 159 x 159 mm
- F: Tweeter Protrusion: 0.55" / 14 mm
- G: Outer Motor Diameter: 2.76" / 70 mm





CG443

200 WATTS | 4" (114 mm)
3-WAY LOUDSPEAKERS (1 PAIR)

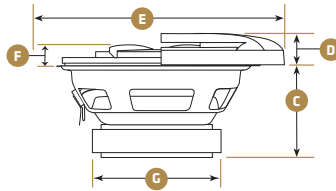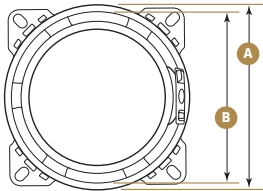

GENERAL

- 3-Way System
- Rubber Surround
- Poly Injection Cone
- High Temperature Voice Coil
- Stamped Steel Basket
- 1" (25 mm) Midrange
- 0.5" (13 mm) Dome Tweeter

SPECIFICATIONS

- Max Power: 200 W
- Nominal Impedance: 4 Ω
- Frequency Response: 115 Hz to 20 kHz
- System Sensitivity (1 W/1 m): 84 dB

DIMENSIONS



- A: Overall Diameter: 3.94" x 3.94" / 100 x 100 mm
- B: Installation Hole Diameter:
3.66" x 3.66" / 93 x 93 mm
- C: Mounting Depth: 1.73" / 44 mm
- D: Grill Protrusion: 0.75" / 19 mm
- E: Overall Speaker w/Grill: 5.4" x 5.4" / 137 x 137 mm
- F: Tweeter Protrusion: 0.55" / 14 mm
- G: Outer Motor Diameter: 2.76" / 70 mm





EX369

300 WATTS | 6" x 9" (152 x 229 mm)
3-WAY SPEAKERS (1 PAIR)

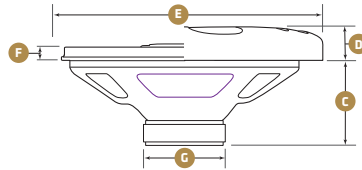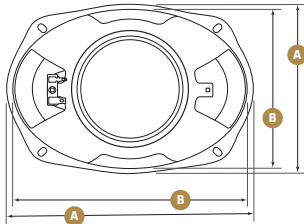

GENERAL

- 3-Way System
- Rubber Surround
- Polypropylene Cone
- Stamped Steel Basket
- 2" (51 mm) Midrange
- 1" (25 mm) Dome Tweeter

SPECIFICATIONS

- Max Power: 300 W
- Nominal Impedance: 4 Ω
- Frequency Response: 50 Hz-20kHz
- System Sensitivity (1 W/1 m): 92 dB
- 6dB/Oct High-Pass Filter

DIMENSIONS



- A: Overall Diameter: 9.5" x 6.81" / 241 x 173 mm
- B: Installation Hole Diameter: 8.81" x 5.88" / 223 x 150 mm
- C: Mounting Depth: 2.87" / 73 mm
- D: Grill Protrusion: 1.02" / 26 mm
- E: Overall Speaker w/Grill: 10.38" x 7.38" / 265 x 187 mm
- F: Tweeter Protrusion: 0.43" / 11 mm
- G: Outer Motor Diameter: 3.94" / 100 mm





EX365

150 WATTS | 6.5" (165 mm)
FULL RANGE 3-WAY SPEAKERS (1 PAIR)

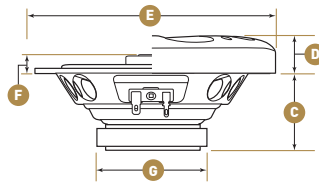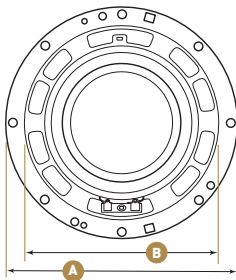

GENERAL

- 3-Way System
- Rubber Surround
- Polypropylene Cone
- Stamped Steel Basket
- 1.25" (32 mm) Midrange
- 0.5" (13 mm) Dome Tweeter

SPECIFICATIONS

- Max Power: 150 W
- Nominal Impedance: 4 Ω
- Frequency Response: 85 Hz-18kHz
- System Sensitivity (1 W/1 m): 88 dB

DIMENSIONS

A: Overall Diameter: 9.5" x 6.81" / 241 x 173 mm

B: Installation Hole Diameter:
8.81" x 5.88" / 223 x 150 mm

C: Mounting Depth: 2.87" / 73 mm

D: Grill Protrusion: 1.02" / 26 mm

E: Overall Speaker w/Grill: 10.38" x 7.38"
265 x 187 mm

F: Tweeter Protrusion: 0.43" / 11 mm

G: Outer Motor Diameter: 3.94" / 100 mm





EV5000D

5000 HIGH OUTPUT | CLASS D
MONOBLOCK POWER AMPLIFIER



FEATURES

- Monoblock
- Class D Topology
- 1 Ω Stable
- PWM MOSFET Power Supply
- RCA In/Out
- Low Pass Filter
- Subsonic Filter
- Bass Boost
- Phase Control
- Remote Subwoofer Control
- Strapping Capable
- Thermal, Short and Overload Protection Circuits



EVOLUTION CLASS D AMPLIFIER END PANEL DETAIL



REMOTE SUBWOOFER CONTROL



Dimensions: 19.5" x 10" x 2.38" - (495 x 254 x 60 mm)





EV4000D

4000 HIGH OUTPUT | CLASS D
MONOBLOCK POWER AMPLIFIER



FEATURES

- Monoblock
- Class D Topology
- 1 Ω Stable
- PWM MOSFET Power Supply
- RCA In/Out
- Low Pass Filter
- Subsonic Filter
- Bass Boost
- Phase Control
- Remote Subwoofer Control
- Strapping Capable
- Thermal, Short and Overload Protection Circuits



EVOLUTION CLASS D AMPLIFIER END PANEL DETAIL



REMOTE SUBWOOFER CONTROL



Dimensions: 15" x 10" x 2.38" – (381 x 254 x 60 mm)





EV3000D

3000 HIGH OUTPUT | CLASS D
MONOBLOCK POWER AMPLIFIER



EVOLUTION CLASS D AMPLIFIER END PANEL DETAIL



REMOTE SUBWOOFER CONTROL



Dimensions: 15" x 10" x 2.38" – (381 x 254 x 60 mm)

FEATURES

- Monoblock
- Class D Topology
- 1 Ω Stable
- PWM MOSFET Power Supply
- RCA In/Out
- Low Pass Filter
- Subsonic Filter
- Bass Boost
- Phase Control
- Remote Subwoofer Control
- Strapping Capable
- Thermal, Short and Overload Protection Circuits





EV2500M

2500 HIGH OUTPUT | CLASS A/B
MONOBLOCK POWER AMPLIFIER



EVOLUTION CLASS A/B AMPLIFIER END PANEL DETAIL



REMOTE SUBWOOFER CONTROL



Dimensions: 15.5" x 10" x 2.38" - (394 x 254 x 60 mm)

FEATURES

- Monoblock
- Class A/B Topology
- 2 Ω Stable
- PWM MOSFET Power Supply
- RCA & Speaker Level Inputs
- Low Pass Filter
- Bass Boost
- Remote Subwoofer Control
- Thermal, Short and Overload Protection Circuits





EV1500M

1500 HIGH OUTPUT | CLASS A/B
MONOBLOCK POWER AMPLIFIER



EVOLUTION CLASS A/B AMPLIFIER END PANEL DETAIL



REMOTE SUBWOOFER CONTROL



Dimensions: 10" x 10" x 2.38" - (254 x 254 x 60 mm)

FEATURES

- Monoblock
- Class A/B Topology
- 2 Ω Stable
- PWM MOSFET Power Supply
- RCA & Speaker Level Inputs
- Low Pass Filter
- Bass Boost
- Remote Subwoofer Control
- Thermal, Short and Overload Protection Circuits





EV4.1600

1600 HIGH OUTPUT | CLASS A/B
4 CHANNEL POWER AMPLIFIER



EVOLUTION CLASS A/B AMPLIFIER END PANEL DETAIL



REMOTE SUBWOOFER CONTROL



Dimensions: 13.5" x 10" x 2.38" - (343 x 254 x 60 mm)

FEATURES

- 4/3/2 Channel
- Full-Range, Class A/B
- 2 Ω Stereo Stable
- PWM MOSFET Power Supply
- RCA & Speaker Level Inputs
- HP & LP Filter
- Bass Boost
- Remote Subwoofer Control
- Thermal, Short and Overload Protection Circuits





EV4.1000

1000 HIGH OUTPUT | CLASS A/B
4-CHANNEL POWER AMPLIFIER



EVOLUTION CLASS A/B AMPLIFIER END PANEL DETAIL



REMOTE SUBWOOFER CONTROL



Dimensions: 10.75" x 10" x 2.38" - (273 x 254 x 60 mm)

FEATURES

- 4/3/2 Channel
- Full-Range, Class A/B
- 2 Ω Stereo Stable
- PWM MOSFET Power Supply
- RCA & Speaker Level Inputs
- HP & LP Filters
- Bass Boost
- Remote Subwoofer Control
- Thermal, Short and Overload Protection Circuits





EV2.2000

2000 HIGH OUTPUT | CLASS A/B
2 CHANNEL POWER AMPLIFIER



EVOLUTION CLASS A/B AMPLIFIER END PANEL DETAIL



REMOTE SUBWOOFER CONTROL



Dimensions: 16" x 10" x 2.38" - (406 x 254 x 60 mm)

FEATURES

- 2/1 Channel
- Full-Range, Class A/B
- 2 Ω Stereo Stable
- PWM MOSFET Power Supply
- RCA & Speaker Level Inputs
- HP & LP Filters
- Bass Boost
- Remote Subwoofer Control
- Thermal, Short and Overload Protection Circuits





EV2.1600

1600 HIGH OUTPUT | CLASS A/B
2 CHANNEL POWER AMPLIFIER



EVOLUTION CLASS A/B AMPLIFIER END PANEL DETAIL



REMOTE SUBWOOFER CONTROL



Dimensions: 14" x 10" x 2.38" - (356 x 254 x 60 mm)

FEATURES

- 2/1 Channel
- Full-Range, Class A/B
- 2 Ω Stereo Stable
- PWM MOSFET Power Supply
- RCA & Speaker Level Inputs
- HP & LP Filters
- Bass Boost
- Remote Subwoofer Control
- Thermal, Short and Overload Protection Circuits





EV2.1200

1200 HIGH OUTPUT | CLASS A/B
2 CHANNEL POWER AMPLIFIER



EVOLUTION CLASS A/B AMPLIFIER END PANEL DETAIL



REMOTE SUBWOOFER CONTROL



Dimensions: 12" x 10" x 2.38" - (305 x 254 x 60 mm)

FEATURES

- 2/1 Channel
- Full-Range, Class A/B
- 2 Ω Stereo Stable
- PWM MOSFET Power Supply
- RCA & Speaker Level Inputs
- HP & LP Filters
- Bass Boost
- Remote Subwoofer Control
- Thermal, Short and Overload Protection Circuits





EV2.1000

1000 HIGH OUTPUT | CLASS A/B
2 CHANNEL POWER AMPLIFIER



EVOLUTION CLASS A/B AMPLIFIER END PANEL DETAIL



REMOTE SUBWOOFER CONTROL



Dimensions: 9.5" x 10" x 2.38" - (241 x 254 x 60 mm)

FEATURES

- 2/1 Channel
- Full-Range, Class A/B
- 2 Ω Stereo Stable
- PWM MOSFET Power Supply
- RCA & Speaker Level Inputs
- HP & LP Filters
- Bass Boost
- Remote Subwoofer Control
- Thermal, Short and Overload Protection Circuits





EV400.4

400 HIGH OUTPUT | CLASS A/B
4 CHANNEL POWER AMPLIFIER



EVOLUTION CLASS A/B AMPLIFIER END PANEL DETAIL



Dimensions: 4.875" x 9" x 1.875" - (124 x 229 x 48 mm)

FEATURES

- 4 Channel
- Full-Range, Class A/B
- 2 Ω Stereo Stable
- PWM MOSFET Power Supply
- RCA & Speaker Level Inputs
- Low Pass Filter
- Thermal, Short and Overload Protection Circuits





EV200.2

200 HIGH OUTPUT | CLASS A/B
2 CHANNEL POWER AMPLIFIER



EVOLUTION CLASS A/B AMPLIFIER END PANEL DETAIL



Dimensions: 4.88" x 9" x 1.88" - (124 x 229 x 48 mm)

FEATURES

- 2/1 Channel
- Full-Range, Class A/B
- 2 Ω Stereo Stable
- PWM MOSFET Power Supply
- RCA & Speaker Level Inputs
- Low Pass Filter
- Thermal, Short and Overload Protection Circuits





EV4.400

400 HIGH OUTPUT | CLASS A/B
4 CHANNEL POWER AMPLIFIER



EVOLUTION CLASS A/B AMPLIFIER END PANEL DETAIL



Dimensions: 6.88" x 9" x 1.88" - (175 x 229 x 48 mm)

FEATURES

- 4 Channel
- Full-Range, Class A/B
- 2 Ω Stereo Stable
- PWM MOSFET Power Supply
- RCA & Speaker Level Inputs
- Low Pass Filter
- Thermal, Short and Overload Protection Circuits





EV2.200

200 HIGH OUTPUT | CLASS A/B
2 CHANNEL POWER AMPLIFIER



EVOLUTION CLASS A/B AMPLIFIER END PANEL DETAIL



Dimensions: 4.88" x 9.0" x 1.88" - (124 x 229 x 48 mm)

PLAYBACK

- 2 Channel
- Full-Range, Class A/B
- 2 Ω Stereo Stable
- PWM MOSFET Power Supply
- RCA & Speaker Level Inputs
- Low Pass Filter
- Thermal, Short and Overload Protection Circuits





EVO5000.1

5000 HIGH OUTPUT
CLASS D MONOBLOCK POWER AMPLIFIER



EVO CLASS D AMPLIFIER END PANEL DETAIL



REMOTE SUBWOOFER CONTROL



Dimensions: 19.09" x 10" x 2.31" – (485 x 254 x 59 mm)

FEATURES

- Monoblock
- Class D Topology
- 1 Ω Stable
- PWM MOSFET Power Supply
- RCA In/Out
- Low Pass Filter
- Subsonic Filter
- Bass Boost
- Phase Control
- Remote Subwoofer Control
- Strapping Capable
- Thermal, Short and Overload Protection Circuits





EVO4000.1

4000 HIGH OUTPUT
CLASS D MONOBLOCK POWER AMPLIFIER



EVO CLASS D AMPLIFIER END PANEL DETAIL



REMOTE SUBWOOFER CONTROL



Dimensions: 14.69" x 10" x 2.31" - (373 x 254 x 59 mm)

FEATURES

- Monoblock
- Class D Topology
- 1 Ω Stable
- PWM MOSFET Power Supply
- RCA In/Out
- Low Pass Filter
- Subsonic Filter
- Bass Boost
- Phase Control
- Remote Subwoofer Control
- Strapping Capable
- Thermal, Short and Overload Protection Circuits





EVO3000.1

3000 HIGH OUTPUT
CLASS D MONOBLOCK POWER AMPLIFIER



EVO CLASS D AMPLIFIER END PANEL DETAIL



REMOTE SUBWOOFER CONTROL



Dimensions: 12.69" x 10" x 2.31" - (322 x 254 x 59 mm)

FEATURES

- Monoblock
- Class D Topology
- 1 Ω Stable
- PWM MOSFET Power Supply
- RCA In/Out
- Low Pass Filter
- Subsonic Filter
- Bass Boost
- Phase Control
- Remote Subwoofer Control
- Strapping Capable
- Thermal, Short and Overload Protection Circuits





EVO2500.1

2500 HIGH OUTPUT | CLASS A/B
MONOBLOCK POWER AMPLIFIER



EVO CLASS A/B MONOBLOCK AMPLIFIER END PANEL DETAIL



REMOTE SUBWOOFER CONTROL



Dimensions: 15.19" x 10" x 2.31" - (386 x 254 x 59 mm)

FEATURES

- Monoblock
- Class A/B Topology
- PWM MOSFET Power Supply
- RCA & Speaker Level Inputs
- Low Pass Filter
- Bass Boost
- 2 Ω Stereo Stable
- Remote Subwoofer Control
- Thermal, Short and Overload Protection Circuits





EVO2000.1

2000 HIGH OUTPUT | CLASS A/B
MONOBLOCK POWER AMPLIFIER



EVO CLASS D AMPLIFIER END PANEL DETAIL



REMOTE SUBWOOFER CONTROL



Dimensions: 15.19" x 10" x 2.31" - (386 x 254 x 59 mm)

FEATURES

- Monoblock
- Class A/B Topology
- 2 Ω Stable
- PWM MOSFET Power Supply
- RCA & Speaker Level Inputs
- Low Pass Filter
- Bass Boost
- Remote Subwoofer Control
- Thermal, Short and Overload Protection Circuits





EVO1500.1

1500 HIGH OUTPUT | FULL RANGE
CLASS A/B MONOBLOCK POWER AMPLIFIER



EVO CLASS A/B AMPLIFIER END PANEL DETAIL



REMOTE SUBWOOFER CONTROL



Dimensions: 9.69" x 10" x 2.31" – (246 x 254 x 59 mm)

FEATURES

- Monoblock
- Full-Range, Class A/B
- 2 Ω Stable
- PWM MOSFET Power Supply
- RCA & Speaker Level Inputs
- Low Pass Filter
- Bass Boost
- Remote Subwoofer Control
- Thermal, Short and Overload Protection Circuits





CG30001D

3000 HIGH OUTPUT
CLASS D MONOBLOCK POWER AMPLIFIER



CHARGE CLASS D AMPLIFIER END PANEL DETAIL



REMOTE SUBWOOFER CONTROL



Dimensions: 13.7" x 6.5" x 2.5" - (348 x 165 x 64 mm)

FEATURES

- Monoblock
- Class D Topology
- 1 Ω Stable
- PWM MOSFET Power Supply
- RCA In/Out
- Low Pass Filter
- Subsonic Filter
- Bass Boost
- Phase Control
- Remote Subwoofer Control
- Strapping Capable
- Thermal, Short and Overload Protection Circuits





CG1604

1600 HIGH OUTPUT | CLASS A/B
4-CHANNEL POWER AMPLIFIER



CHARGE CLASS A/B AMPLIFIER END PANEL DETAIL



REMOTE SUBWOOFER CONTROL



Dimensions: 13.7" x 6.5" x 2.5" - (348 x 165 x 64 mm)

FEATURES

- 4/3/2 Channel
- Full-Range, Class A/B
- 2Ω Stereo Stable
- PWM MOSFET Power Supply
- RCA & Speaker Level Inputs
- HP & LP Filters
- Bass Boost
- Remote Subwoofer Control
- Thermal, Short and Overload Protection Circuits





CG1501M

1500 HIGH OUTPUT | CLASS A/B
MONOBLOCK POWER AMPLIFIER



CHARGE CLASS A/B AMPLIFIER END PANEL DETAIL



REMOTE SUBWOOFER CONTROL



Dimensions: 11.72" x 6.5" x 2.5" - (298 x 165 x 64 mm)

FEATURES

- Monoblock
- Full-Range, Class A/B
- 2 Ω Stable
- PWM MOSFET Power Supply
- RCA & Speaker Level Inputs
- Low Pass Filter
- Bass Boost
- Remote Subwoofer Control
- Thermal, Short and Overload Protection Circuits





CG1202

1200 HIGH OUTPUT | CLASS A/B
2-CHANNEL POWER AMPLIFIER



CHARGE CLASS A/B AMPLIFIER END PANEL DETAIL



FEATURES

- 2/1 Channel
- Full-Range, Class A/B
- 2 Ω Stereo Stable
- PWM MOSFET Power Supply
- RCA & Speaker Level Inputs
- HP & LP Filters
- Bass Boost
- Thermal, Short and Overload Protection Circuits



Dimensions: 11.72" x 6.5" x 2.5" - (298 x 165 x 64 mm)





BTB8L

BLUETOOTH® | ALL-TERRAIN SOUND SYSTEM

FEATURING 8" MARINE SPEAKERS AND 1" TWEETERS

PLUS BUILT-IN CLASS D AMPLIFIER AND MULTICOLOR RGB ILLUMINATION



INPUTS & OUTPUTS

- **Bluetooth®** Audio Streaming
Stream and Control your Favorite Music APPs
- **Compatible with Audio Output of iPod®/iPhone®, Smartphones and MP3 players**
- Aux-in

GENERAL

- All Weather Designed Enclosure
- All Weather Speakers
- IPX Rated
- Multicolor Illumination
- Wireless RC for LED Lights
- Easy Pairing with Bluetooth® Auto Re-connect
- Built-In Class-D Amp
- Plug and Play for Easy Installation
- 12 V Cig. Lighter Adapter
- Ideal for ATV/UTV and Tailgating



The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Sound Storm Laboratories is under license. Other trademarks and trade names are those of their respective owners.






BTB6L

BLUETOOTH® | ALL-TERRAIN SOUND SYSTEM

FEATURING 6.5" MARINE SPEAKERS AND 1" TWEETERS

PLUS BUILT-IN CLASS D AMPLIFIER AND MULTICOLOR RGB ILLUMINATION

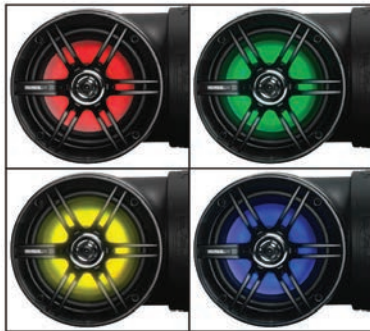

WIRELESS REMOTE CONTROL FOR LED LIGHTS

INPUTS & OUTPUTS

- **Bluetooth®** Audio Streaming
Stream and Control your Favorite Music APPs
- **Compatible with Audio Output of iPod®/iPhone®, Smartphones and MP3 players**
- Aux-in

GENERAL

- All Weather Designed Enclosure
- All Weather Speakers
- IPX Rated
- Multicolor Illumination
- Wireless RC for LED Lights
- Easy Pairing with Bluetooth® Auto Re-connect
- Built-In Class-D Amp
- Plug and Play for Easy Installation
- 12 V Cig. Lighter Adapter
- Ideal for ATV/UTV and Tailgating



The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Sound Storm Laboratories is under license. Other trademarks and trade names are those of their respective owners.





BTB8

BLUETOOTH® | ALL-TERRAIN SOUND SYSTEM
FEATURING 8" MARINE SPEAKERS AND 1" TWEETERS
PLUS BUILT-IN CLASS D AMPLIFIER



INPUTS & OUTPUTS

- **Bluetooth®** Audio Streaming
Stream and Control your Favorite Music APPs
- **Compatible with Audio Output of iPod®/iPhone®, Smartphones and MP3 players**
- Aux-in

GENERAL

- All Weather Designed Enclosure
- All Weather Speakers
- IPX Rated
- Easy Pairing with Bluetooth® Auto Re-connect
- Built-In Class-D Amp
- Plug and Play for Easy Installation
- 12 V Cig. Lighter Adapter
- Ideal for ATV/UTV and Tailgating

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Sound Storm Laboratories is under license. Other trademarks and trade names are those of their respective owners.





BTB6

BLUETOOTH® | ALL-TERRAIN SOUND SYSTEM
FEATURING 6.5" MARINE SPEAKERS AND 1" TWEETERS
PLUS BUILT-IN CLASS D AMPLIFIER



INPUTS & OUTPUTS

- **Bluetooth®** Audio Streaming
Stream and Control your Favorite Music APPs
- **Compatible with Audio Output of iPod®/iPhone®, Smartphones and MP3 players**
- Aux-in

GENERAL

- All Weather Designed Enclosure
- All Weather Speakers
- IPX Rated
- Easy Pairing with Bluetooth® Auto Re-connect
- Built-In Class-D Amp
- Plug and Play for Easy Installation
- 12 V Cig. Lighter Adapter
- Ideal for ATV/UTV and Tailgating

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Sound Storm Laboratories is under license. Other trademarks and trade names are those of their respective owners.






SB26

BLUETOOTH® | 26" AMPLIFIED SOUND BAR
FEATURES BUILT-IN CLASS A/B AMPLIFIER




Dimensions:

26.38" (670 mm) x 4.88" (124 mm) x 3.69" (94 mm)

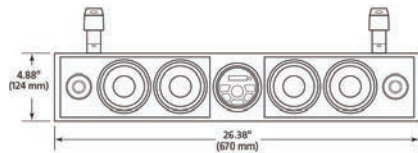

Weight:

14.4 lbs (6.5 kg)



FEATURES

- All-Terrain System
- IPX5-Rated (Weatherproof/Dustproof)
- Full-Range Class A/B Amplifier
- (4) 4" High Power Speakers + (2) 1" Soft Dome Tweeters
- Aluminum Enclosure w/Internal H.D.S. (Heat Dissipation System)
- **Compatible w/ Audio Output of iPod®/iPhone®, Smartphones, and MP3 Players**
- Multi-Fit Clamp System (1.75", 2" O.D.)*
- USB Port
- USB Charging (1A)**
- Aux-In
- Illuminated Soft Touch Controls
- Wireless Remote Control

BLUETOOTH® FEATURES

- **Bluetooth®** v4.1 w/Simple Pairing
- **Bluetooth®** AUDIO & CONTROL (A2DP & AVRCP)
Stream and Control your Favorite Music APPs



*Not all UTV, SxS, All-Terrain vehicles are supported. Additional hardware may be required based on your application.

**Charging only. Not for mobile device playback.

iPod® / iPhone® are trademarks of Apple, Inc. registered in the U.S. and other countries. Sound Storm Laboratories is not allied with Apple, Inc.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Sound Storm Laboratories is under license. Other trademarks and trade names are those of their respective owners.





SB18

BLUETOOTH® | 18" AMPLIFIED SOUND BAR
FEATURES BUILT-IN CLASS A/B AMPLIFIER




Dimensions:

18.125" (460 mm) x 4.88" (124 mm) x 3.69" (94 mm)

Weight:

8.2 lbs (3.7 kg)

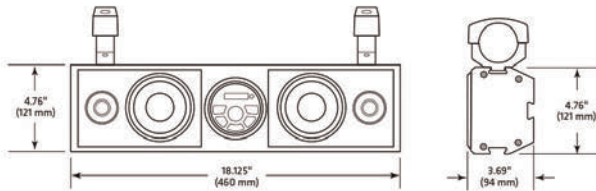

FEATURES

- All-Terrain System
- IPX5-Rated (Weatherproof/Dustproof)
- Full-Range Class A/B Amplifier
- (2) 4" High Power Speakers + (2) 1" Soft Dome Tweeters
- Aluminum Enclosure w/Internal H.D.S. (Heat Dissipation System)
- **Compatible w/ Audio Output of iPod®/iPhone®, Smartphones, and MP3 Players**
- Multi-Fit Clamp System (1.75", 2" O.D.)*
- USB Port
- USB Charging (1A)**
- Aux-In
- Illuminated Soft Touch Controls
- Wireless Remote Control

BLUETOOTH® FEATURES

- **Bluetooth®** v4.1 w/Simple Pairing
- **Bluetooth®** AUDIO & CONTROL (A2DP & AVRCP)
Stream and Control your Favorite Music APPs

*Not all UTV, SxS, All-Terrain vehicles are supported. Additional hardware may be required based on your application.

**Charging only. Not for mobile device playback.

iPod® / iPhone® are trademarks of Apple, Inc. registered in the U.S. and other countries. Sound Storm Laboratories is not allied with Apple, Inc.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Sound Storm Laboratories is under license. Other trademarks and trade names are those of their respective owners.





SMC82BB

BLUETOOTH® | HIGH POWER
WEATHERPROOF MOTORCYCLE HANDLEBAR MOUNT
FULL RANGE SPEAKERS with BUILT-IN CLASS D AMPLIFIER



TWO ADJUSTABLE BRACKETS INCLUDED



AUXILIARY CABLE



IN-LINE POWER SWITCH



IN-LINE FUSE/POWER CABLE



FEATURES

- **Bluetooth®** Audio Streaming
Stream and Control your Favorite Music APPs
- **Compatible with Audio Output of iPod®/iPhone®, Smartphones, and MP3 Players**
- 3" (76 mm) Matte Black Speakers (1 Pair)
- Built-in Class D Amplifier
- Aux-In
- IPX-5 Rated Speakers
 - Weather Resistant
 - Not Submergible
- In-line Volume Control
- In-line Power Switch & Fuse
- Handle Bar Mount
- Includes Mounting Brackets Adjustable to fit 0.75" to 1.25" Handle Bars
- Great for 12V Motorcycles, Scooters and ATV's!


iPod® and iPhone® are registered trademarks of Apple Inc. in the U.S. and other countries. Sound Storm Laboratories is not allied with Apple Inc. The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Sound Storm Laboratories is under license. Other trademarks and trade names are those of their respective owners.





SGR3

**BLUETOOTH® (AUDIO STREAMING)
MARINE GAUGE DIGITAL MEDIA AM/FM RECEIVER
FEATURING BUILT-IN AMPLIFIER**

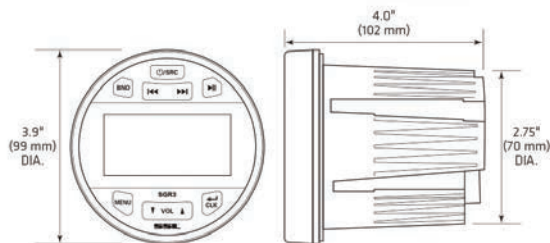

PLAYBACK

- MP3/WMA
- **Bluetooth®** Audio Streaming
Stream and Control your Favorite Music APPs

INPUTS & OUTPUTS

- USB Port
- Aux-In
- USB Charging (1A)*
- **Compatible with Audio Output of iPod®/iPhone®, Smartphones, and MP3 Players**
- Front & Rear Pre-Amp Outputs

GENERAL

- AM/FM Receiver
- Switchable US & EU Tuner Frequencies
- IPX5
- Conformal Coated PCB
- Zero Current Draw Memory
(Radio Preset Memory in case of Battery Disconnect)
- Cutout Diameter: 3" (76 mm)
- 60 Watts x 4 Max Power Amplifier

*Charging only. Not for mobile device playback.

iPod® and iPhone® are registered trademarks of Apple Inc. in the U.S. and other countries. Sound Storm Laboratories is not allied with Apple Inc.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Sound Storm Laboratories is under license. Other trademarks and trade names are those of their respective owners.





SGR3.62

BLUETOOTH® (AUDIO STREAMING) MARINE GAUGE DIGITAL MEDIA AM/FM RECEIVER

FEATURING BUILT-IN AMPLIFIER

PLUS 1 PAIR - 6.5" (165 mm) 2-WAY MARINE FULL RANGE SPEAKER SYSTEM

ALSO INCLUDED: MARINE DIPOLE ANTENNA



*Charging only. Not for mobile device playback.

iPod® and iPhone® are registered trademarks of Apple Inc. in the U.S. and other countries. Sound Storm Laboratories is not allied with Apple Inc.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Sound Storm Laboratories is under license. Other trademarks and trade names are those of their respective owners.

PLAYBACK

- MP3/WMA
- **Bluetooth®** Audio Streaming
Stream and Control your Favorite Music APPs

INPUTS & OUTPUTS

- USB Port
- Aux-In
- USB Charging (1A)*
- **Compatible with Audio Output of iPod®/iPhone®, Smartphones, and MP3 Players**
- Front & Rear Pre-Amp Outputs

GENERAL

- AM/FM Receiver
- Switchable US & EU Tuner Frequencies
- IPX5
- Conformal Coated PCB
- Zero Current Draw Memory
(Radio Preset Memory in case of Battery Disconnect)
- Cutout Diameter: 3" (76 mm)
- 60 Watts x 4 Max Power Amplifier

SPEAKERS

- Resin Treated Cloth Surround
- Polypropylene Cone
- Dual Cone Design
- Composite Basket

SPECIFICATIONS

- Max Power: 180 W
- Nominal Impedance: 4 Ω
- Frequency Response: 85 Hz-20 kHz
- System Sensitivity (1 W/1 m): 86 dB

DIMENSIONS

- A: Overall Diameter: 7.5" / 191 mm
- B: Installation Hole Diameter: 5.47" / 139 mm
- C: Mounting Depth: 2.24" / 57 mm
- D: Grill Protrusion: 0.87" / 22 mm
- E: Outer Motor Diameter: 3.7" / 94 mm





SGR3.64

BLUETOOTH® (AUDIO STREAMING) MARINE GAUGE DIGITAL MEDIA AM/FM RECEIVER

FEATURING BUILT-IN AMPLIFIER

PLUS 2 PAIRS - 6.5" (165 mm) 2-WAY MARINE FULL RANGE SPEAKER SYSTEM

ALSO INCLUDED: MARINE DIPOLE ANTENNA



*Charging only. Not for mobile device playback.

iPod® and iPhone® are registered trademarks of Apple Inc. in the U.S. and other countries. Sound Storm Laboratories is not allied with Apple Inc.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Sound Storm Laboratories is under license. Other trademarks and trade names are those of their respective owners.

PLAYBACK

- MP3/WMA
- **Bluetooth®** Audio Streaming
Stream and Control your Favorite Music APPs

INPUTS & OUTPUTS

- USB Port
- Aux-In
- USB Charging (1A)*
- **Compatible with Audio Output of iPod®/iPhone®, Smartphones, and MP3 Players**
- Front & Rear Pre-Amp Outputs

GENERAL

- AM/FM Receiver
- Switchable US & EU Tuner Frequencies
- IPX5
- Conformal Coated PCB
- Zero Current Draw Memory
(Radio Preset Memory in case of Battery Disconnect)
- Cutout Diameter: 3" (76 mm)
- 60 Watts x 4 Max Power Amplifier

SPEAKERS

- Resin Treated Cloth Surround
- Polypropylene Cone
- Dual Cone Design
- Composite Basket

SPECIFICATIONS

- Max Power: 180 W
- Nominal Impedance: 4 Ω
- Frequency Response: 85 Hz-20 kHz
- System Sensitivity (1 W/1 m): 86 dB

DIMENSIONS

- A: Overall Diameter: 7.5" / 191 mm
- B: Installation Hole Diameter: 5.47" / 139 mm
- C: Mounting Depth: 2.24" / 57 mm
- D: Grill Protrusion: 0.87" / 22 mm
- E: Outer Motor Diameter: 3.7" / 94 mm



SSL®

SX310

3-WAY ELECTRONIC CROSSOVER



DETAIL OF SX310 END PANEL

REMOTE SUBWOOFER CONTROL



Dimensions: 7.375" x 8.5" x 1.625" - (187.3 x 215.9 x 41.3 mm)

FEATURES

- Front, Rear and Sub In/Outs
- Remote Subwoofer Control
- Variable X-Over (Front, Rear and Sub)
- Freq. Switch (x1/x20)
- X-Over Slope (6dB/12dB)
- Parallel Input Switch
- Variable Bass Boost
- Selectable Bass Boost Freq.
- Phase Selector
- Subwoofer Mode Selector
- S/N Ratio: >110dB
- 8V Pre-Amp Output

SSL®

SSL®

SX210

2-WAY ELECTRONIC CROSSOVER



DETAIL OF SX210 END PANEL

REMOTE SUBWOOFER CONTROL



Dimensions: 7.375" x 7.25" x 1.625" (18.7 x 18.4 x 4.1 cm)

FEATURES

- Left/Right Inputs
- Left/Right Sub Outputs
- Left/Right High Pass Outputs
- Remote Subwoofer Control
- Variable High Pass Crossover
- Variable Subwoofer Crossover
- Variable Bass Boost
- Selectable Phase
- 8V Pre-Amp Output

SSL®



S4EQ

4-BAND PREAMP EQUALIZER WITH SUBWOOFER OUTPUT
FEATURING RED/GREEN ILLUMINATION OPTIONS



4-BAND EQ CONTROL ILLUMINATION



S4EQ CONNECTIONS PANEL DETAIL

Dimensions: 7" (L) x 4.75" (W) x 1.19" (H) | 179 mm (L) x 121 mm (W) x 30 mm (H)

FEATURES

- Dual-Color (Selectable) Illumination
- EQ Center Frequencies: 40Hz, 150Hz, 1kHz, 20kHz
- Variable Subwoofer Crossover : 30-250Hz
- Subwoofer Level Control
- Subwoofer Phase Shift Selector
- Fader Control
- Master Volume Control
- Input Selectors (1 & 2)
- Front, Rear and Subwoofer Preamp Outputs
- Gold-plated RCA Inputs and Outputs





SQ4

4-BAND EQUALIZER WITH SUBWOOFER CONTROL



4-BAND EQ CONTROL PANEL



SQ4 CONNECTIONS PANEL DETAIL

Dimensions: 7.0" (L) x 4.75" (W) x 1.19" (H) | 179 mm x 121 mm x 30 mm

FEATURES

- 2 Source Input
- Front, Rear, Sub Pre-Amp Outputs
- EQ Band Center Frequencies: 50 Hz, 200 Hz, 2 kHz, 20 kHz; ± 12 dB
- Selectable Subwoofer Filter
- Subwoofer Level Control
- Fader Control
- Master Volume Control
- Signal-to-Noise Ratio: -96 dB
- Pre-amp Output: 7 V
- THD: 0.03% @ 1 kHz



The SSL logo is displayed in white on a solid orange square background.

C352

3.5 FARAD DIGITAL CAPACITOR



FEATURES

- 3.5 Farads with digital voltage display
- Red Digital Voltage Display
- Audible warning tone for reverse polarity
- Audible warning tone for low battery voltage
- Audible warning tone for voltage overload
- Low E.S.R. (Equivalent Series Resistance)
- 16 V / 24 V Surge
- Mounting Hardware

The SSL logo is displayed in white on a solid orange background.

The SSL logo is displayed in white on a solid orange square background.

C22

2.0 FARAD DIGITAL CAPACITOR



FEATURES

- Illuminated Digital Voltage Meter
- Low E.S.R. (Equivalent Series Resistance)
- 16 V / 20 V Surge
- Audible Warning Tone for Reverse Polarity
- Audible Warning Tone for Low Battery Voltage
- Audible Warning Tone for Voltage Overload

The SSL logo is displayed in white on a solid orange background.



AKSO

0 GAUGE AMPLIFIER INSTALLATION KIT



FEATURES

- 17 ft. 0 GA Matte Red Power Cable
- High-Quality ANL Fuse Holder
- Nickel Plated ANL Fuse (200A)
- 3 ft. 0 GA Matte White Ground Cable
- 18 ft. 18 GA Blue Turn-On Wire
- 17 ft. 16 GA Grey Speaker Wire
- 17 ft. High Performance RCA Interconnect
- 6 ft. Black Split Loom Tubing
- (10) 6" Black Wire Ties
- (2) Red 0 GA Gold-Plated Ring Terminals
- (2) Black 0 GA Gold-Plated Ring Terminals
- (1) Red 0 GA Gold-Plated Spade Terminal
- (1) Black 0 GA Gold-Plated Spade Terminal



SSL[®]

AKS4

4 GAUGE
AMPLIFIER INSTALLATION KIT



FEATURES

- 17 ft. 4 GA Red Power Cable
- Competition High-Quality Fuse Holder
- 3 ft. 4 GA Black Ground Cable
- 16 ft. 22 GA Blue Turn-On Wire
- 16 ft. High Performance RCA Interconnect
- 20 ft. Transparent Speaker Wire
- (10) 4" Wire Ties
- High-Quality Gold Plated AGU Fuse Holder
- Gold Plated AGU Fuse (60A)
- (4) Rubber Grommets
- (2) Red 4 GA Gold-Plated Ring Terminals
- (2) Black 4 GA Gold-Plated Ring Terminals
- (1) Red 4 GA Gold-Plated Spade Terminal
- (1) Black 4 GA Gold-Plated Spade Terminal
- (2) Butt Splice Wire Connectors
- (2) Screws

SSL[®]

The SSL logo is displayed in white on a yellow background.

AKS8

8 GAUGE AMPLIFIER INSTALLATION KIT



FEATURES

- 17 ft. 8 Gauge Red Power Cable
- Competition High-Quality Fuse Holder
- 3 ft. 8 Gauge Black Ground Cable
- 16 ft. 18 Gauge Blue Turn-On Wire
- 16 ft. High Performance RCA Interconnect
- 20 ft. Speaker Wire
- (7) 4" Wire Ties
- (1) Rubber Grommet
- #10 Gold-Plated Ring Terminal
- (2) Lg. Gold-Plated Spade Terminals
- (5) Sm. Gold-Plated Spade Terminals
- (2) Butt Splice Wire Connectors
- (2) Screws

The SSL logo is displayed in white on a yellow background.

rev. 070721

Learn more about car stereos on our website.