
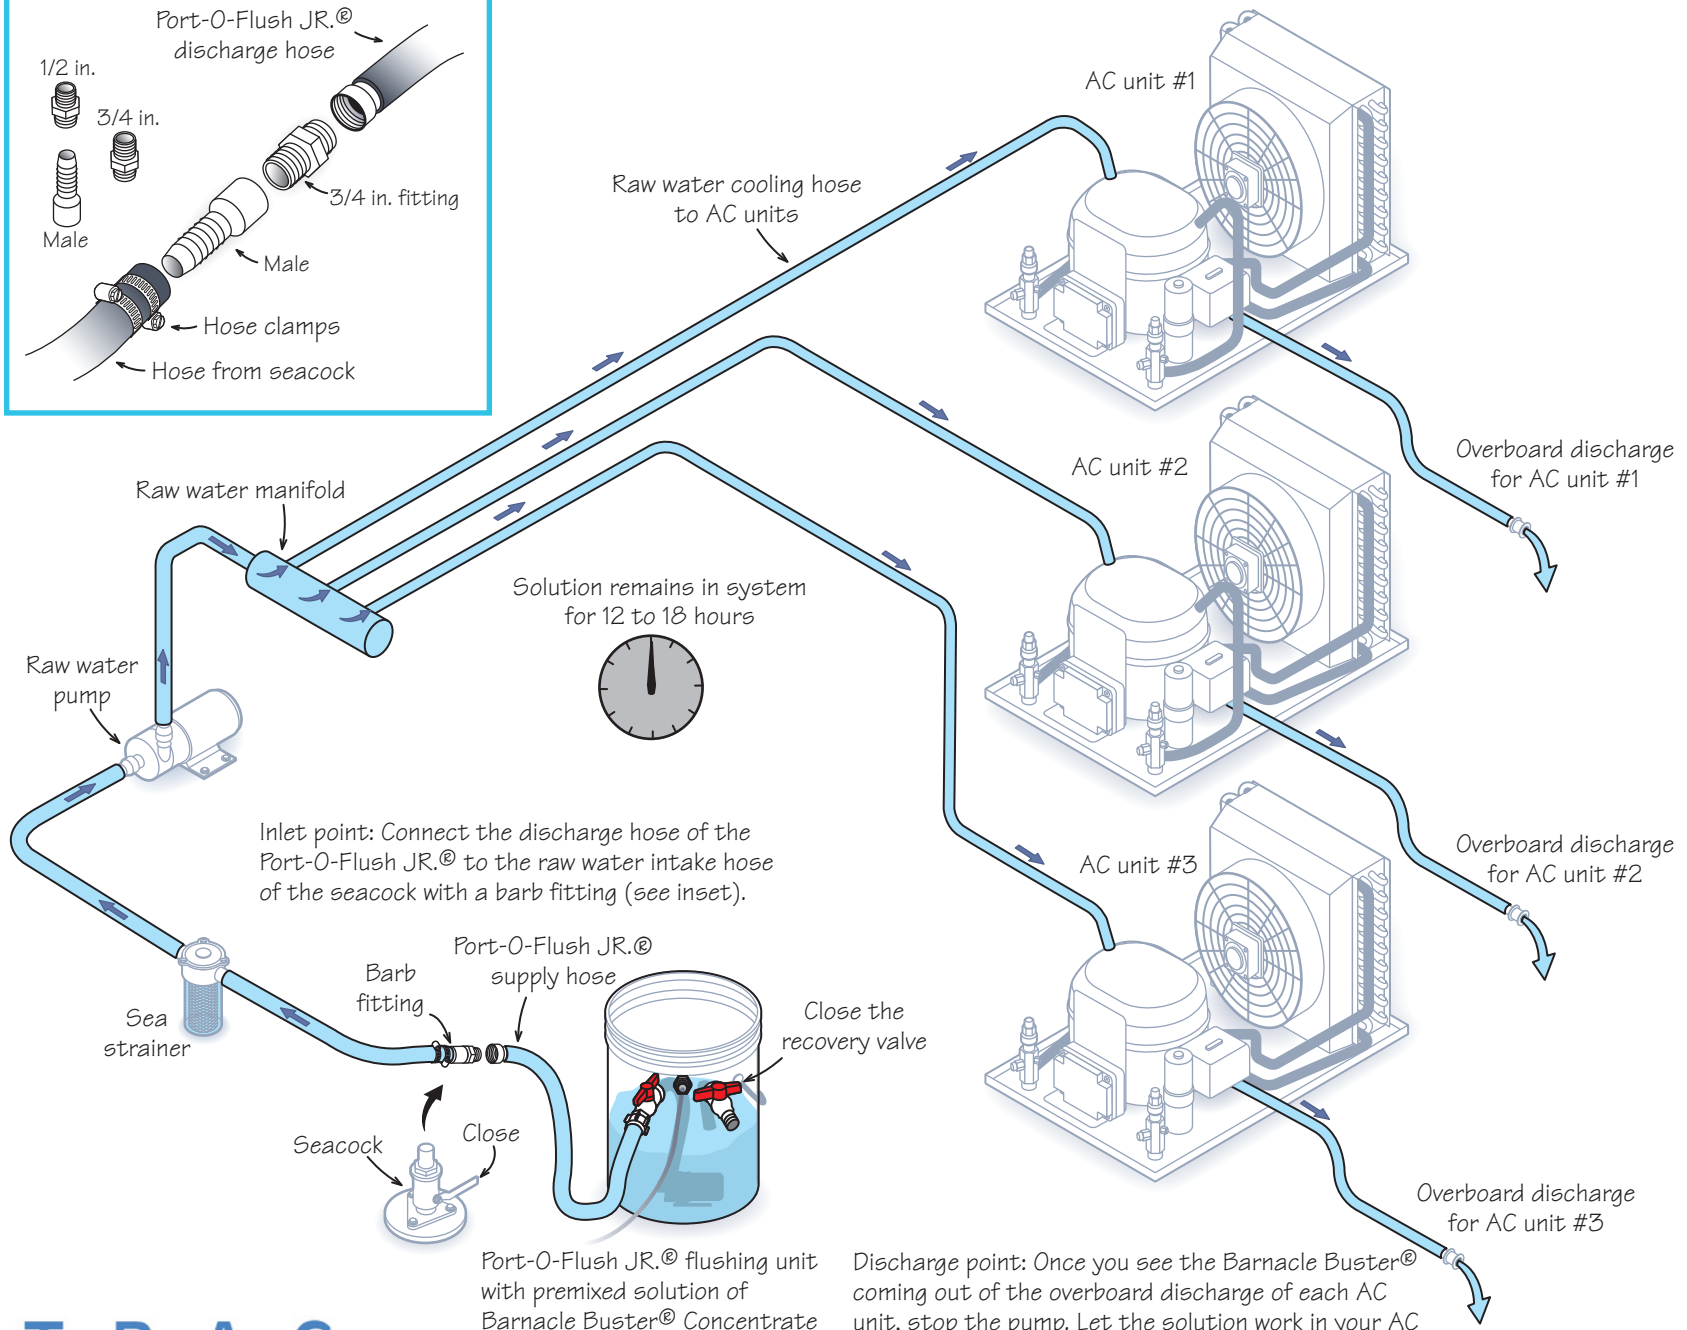


Barb Fitting

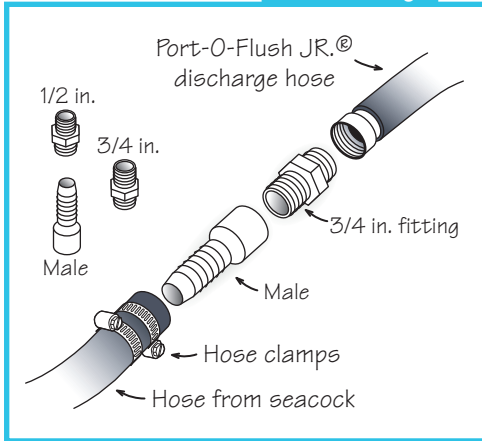

Inlet point: Connect the discharge hose of the Port-O-Flush JR.® to the raw water intake hose of the seacock with a barb fitting (see inset).

Port-O-Flush JR.® flushing unit with premixed solution of Barnacle Buster® Concentrate and water.

Discharge point: Once you see the Barnacle Buster® coming out of the overboard discharge of each AC unit, stop the pump. Let the solution work in your AC system for 12 to 18 hours. When complete, reconnect the suction hose, open the seacock valve and run the system for 5 to 10 minutes to remove the Barnacle Buster® from the system.