


ALL-NEW FCF Platinum

Self-Contained Air Conditioning Series

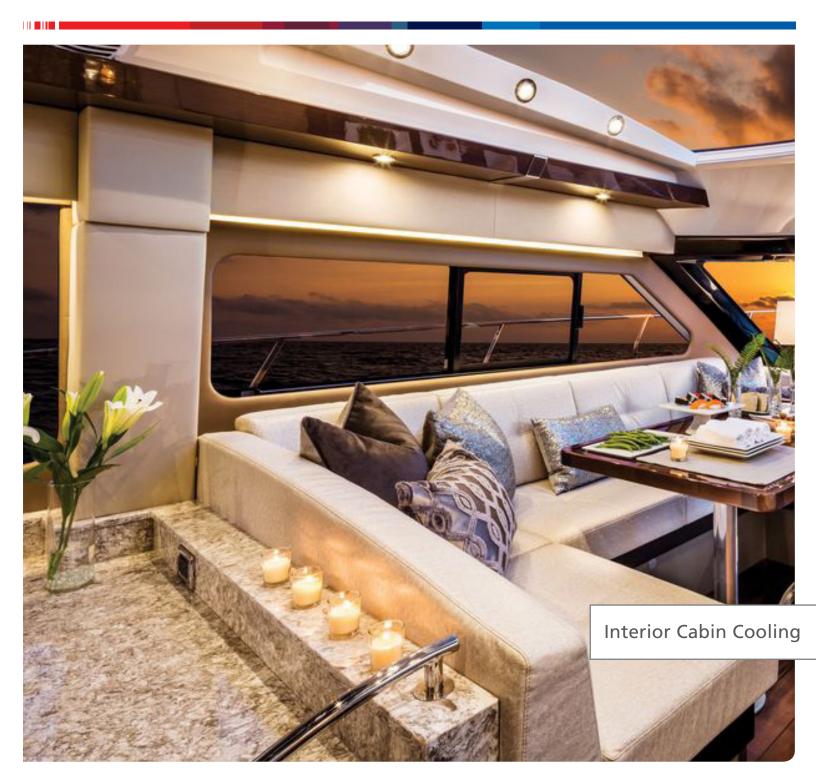

Platinum is the new standard.

The all-new FCF Platinum series is the latest development in Webasto's line of marine comfort solutions. The FCF Platinum features improved design, offering a higher BTU/h rating across a variety of ambient scenarios, while still providing unmatched product reliability and a two-year warranty.

Rated Voltage	115V	230V	
Part Number	5011394A	5011395A	
Cooling Capacity	6,000 1	6,000 BTU/h	
Heating Capacity	6,000 1	6,000 BTU/h	
Rated Frequency	60Hz	50 / 60Hz	
Rated Current	4.7 A	2.9/2.4 A	
Refrigerant Charge	R410A (R410A (0.35kg)	
Comp. LRA	21A	14A	
Min. Condenser Water Flow	1.06 Gal/Mir	1.06 Gal/Min. (4 L/Min.)	
Dimensions (L x W x H)	11.2 x 16 x 11.6 in (2	11.2 x 16 x 11.6 in (285 x 408 x 295 mm)	
Weight	56 lbs (2	56 lbs (25.5kg)	



0
0
\sim
\circ
~
Δ
$\overline{\mathbf{U}}$
Ľ

0

Rated Voltage	115V	230V
Part Number	5011396A	5011397A
Cooling Capacity	10,000 BTU/h	
Heating Capacity	10,000 BTU/h	
Rated Frequency	60Hz	50 / 60Hz
Rated Current	7.2 A	4.2 / 3.7 A
Refrigerant Charge	R410A <i>(0.45kg)</i>	
Comp. LRA	34A	17A
Min. Condenser Water Flow	1.59 Gal/Min. <i>(6 L/Min.)</i>	
Dimensions (L x W x H)	15 x 16 x 12.2 in (380 x 408 x 310 mm)	
Weight	60 lbs (27kg)	



FCFP 12,000

Rated Voltage	115V	230V
Part Number	5011398A	5011399A
Cooling Capacity	12,000 BTU/h	
Heating Capacity	13,000 BTU/h	
Rated Frequency	60Hz	50 / 60Hz
Rated Current	10A	5.1/4.6 A
Refrigerant Charge	R410A (0.5kg)	
Comp. LRA	47A	27A
Min. Condenser Water Flow	2.77 Gal/Min. (10.5 L/Min.)	
Dimensions (L x W x H)	21.6 x 13.1 x 12.5 in (549 x 330 x 320 mm)	
Weight	72 lbs (<i>33kg</i>)	



FCFP 16,000

Rated Voltage	115V	230V
Part Number	5011400A	5011401A
Cooling Capacity	16,000 BTU/h	
Heating Capacity	16,200 BTU/h	
Rated Frequency	60Hz	50 / 60Hz
Rated Current	11.2 A	5.7 / 5.6A
Refrigerant Charge	R410A (0.7kg)	
Comp. LRA	60A	35A
Min. Condenser Water Flow	3.43 Gal/Min. (13 L/Min.)	
Dimensions (L x W x H)	24.3 x 13.5 x 13 in (619 x 343 x 330 mm)	
Weight	88 lbs <i>(40kg)</i>	



Rated Voltage	230V
Part Number	5011402A
Cooling Capacity	20,000 BTU/h
Heating Capacity	20,000 BTU/h
Rated Frequency	50 / 60Hz
Rated Current	10.5/ 7.4 A
Refrigerant Charge	R410A <i>(0.85kg)</i>
Comp. LRA	44A
Min. Condenser Water Flow	5.02 Gal/Min. (19 L/Min.)
Dimensions (L x W x H)	20.8 x 23.4 x 15 in (529 x 595 x 386 mm)
Weight	124 lbs <i>(56.5kg)</i>



Rated Voltage	230V
Part Number	5011403A
Cooling Capacity	25,500 BTU/h
Heating Capacity	25,900 BTU/h
Rated Frequency	50 / 60Hz
Rated Current (C/H)	6.8/ 8.0 A
Refrigerant Charge	R410A (0.95kg)
Comp. LRA	52A
Min. Condenser Water Flow	6.34 Gal/Min. <i>(24 L/Min.)</i>
Dimensions (L x W x H)	20.8 x 23.4 x 15 in (529 x 595 x 386 mm)
Weight	133 lbs (60.5kg)



FCF Platinum | Product Features + Installation

- Long and slim new footprint featured on the 12,000 and 16,000 BTU/h models - allowing for easy replacement of existing units
- Engineered for better performance with a higher BTU/h rating across a variety of ambient scenarios
- Digital display with controller and cable come standard
- 2-year warranty with unmatched product reliability
- Marine-grade stainless steel frame for durability and longevity
- Proprietary compressor well balanced and quiet than ever before
- Low cost replacement parts

Accessories | KoolAir Pumps & Control

Webasto is the North American exclusive distributor of KoolAir Pumps to the marine industry.

- Three pumps available; PM500, PM1000 and TPM1000
- PM500 is a FULLY submersible pump
- Run Dry and Thermal Overload Protection
- All are available in 115 and 230V
- Motors are rated as: continuous duty
- One phase pumps




Now Available

NEW FCF Remote Control

- Control your FCF from any place on your vessel
- Accessory option for all FCF Platinum Units

Part Number 5012610A

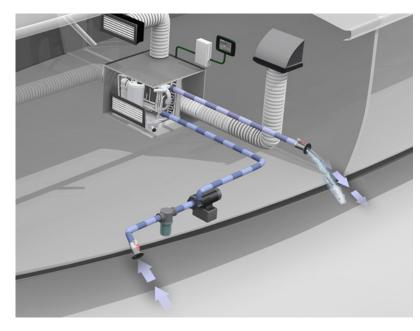

2018

²art Number 910014 • 5/18 • Errors and omissions excepted • Printed in USA • © Webasto Thermo & Comfort North America.



