



Whale[®] High Pressure Wash Down Range

Targeted high pressure wash down range for effective cleaning

- **Smooth constant flow at high pressure:**
 - 3.5 gals/min, 60 psi
 - 4.5 gals/min, 70 psi
- **Easy-to-use trigger handset for targeted water flow**
Soft, non-slip trigger with deck protect nozzle, adjustable jet with push in fittings and dry coupling valve
- **Easy stow 25' coiled hose**
Compact, kink resistant hose with free stowage bag*
- **Elite kit includes unique 4 in 1 deck fitting**
Discreet deck fitting with sliding cover, featuring hose connection, IP65 rated switch and fuse for simple fast installation



**Unique
4 in 1 deck
fitting with
switch, fuse and
sliding cover**







NEW



Whale® High Pressure Wash Down Range

New high pressure wash down range with up to 70 psi

- **Smooth constant flow in a range of pump options**
- **Choice of pumps available:** 4.5 GPM and 3.5 GPM
- **Easy-to-use trigger handset for targeted water flow:** soft, non-slip trigger with deck protect nozzle
- **Easy stow 25' coiled hose:** compact, kink resistant hose with free stowage bag
- **Elite kit includes unique 4 in 1 deck fitting:** discreet deck fitting with sliding cover, featuring hose connection, switch and fuse for simple fast installation

Product Type	Pump Spec	Description	Voltage	Part No.	
Pump	3.5 GPM 60 psi	<ul style="list-style-type: none"> • Pump • Strainer • 2 x 1/2" barbed connections included 	(12V)	WD3517P	
	4.5 GPM 70 psi		(12V) (24V)	WD4517P WD4527P	
Pump and Trigger	3.5 GPM 60 psi	<ul style="list-style-type: none"> • Pump • Strainer • 2 x 1/2" barbed connections included • Adjustable trigger with ergonomic handle & deck protect nozzle 	(12V)	WD3517T	
	4.5 GPM 70 psi		(12V) (24V)	WD4517T WD4527T	
Standard Kit – with Pump, Trigger and Hose	3.5 GPM 60 psi	<ul style="list-style-type: none"> • Pump • Strainer • 2 x 1/2" barbed connections included • Adjustable trigger with ergonomic handle & deck protect nozzle • 25' (7.6m) coil hose, storage bag and quick release hose connection 	(12V)	WD3517S	
	4.5 GPM 70 psi		(12V) (24V)	WD4517S WD4527S	
Elite Kit includes Pump, Trigger, Hose and 4 in 1 Deck Fitting	3.5 GPM 60 psi	<ul style="list-style-type: none"> • Pump • Strainer • 2 x 1/2" barbed connections included • Adjustable trigger with ergonomic handle & deck protect nozzle • 25' (7.6m) coil hose, storage bag and quick release hose connection • Deck fitting with switch, fuse and sliding cover 	(12V)	WD3517E	
	4.5 GPM 70 psi		(12V) (24V)	WD4517E WD4527E	



Whale® High Pressure Wash Down Range


Targeted high pressure wash down range for effective cleaning

Specification


	Pump only models			Pump & trigger models		
Product Code	WD3517P(B)**	WD4517P(B)	WD4527P(B)	WD3517T(B)	WD4517T(B)	WD4527T(B)
Voltage	12V d.c.		24V d.c.	12V d.c.		24V d.c.
Flow Rate	3.5 GPM	4.5 GPM		3.5 GPM	4.5 GPM	
Pressure Switch Setting	60 psi	70 psi		60 psi	70 psi	
Recommended Automotive Fuse Size	15A		10A	15A		10A
Weight	5.1lbs	6.2lbs		5.3lbs	6.4lbs	
Inlet/Outlet Size	½ inch NPT Male			½ inch NPT Male		
Semi Rigid Pipe-work Connections	½ inch barb connections only			½ inch barb connections only		
Materials in Contact with Liquid	Pump: Stainless steel, EPDM, Santoprene, Fittings: ABS, PVC, PP, PA, PC, POM			Pump: Stainless steel, EPDM, Santoprene Fittings: ABS, PVC, PP, PA, PC, POM		
Trigger Materials	N/A			ABS		
Minimum Wire Size	14 AWG			14 AWG		
Maximum Lift	6 feet			6 feet		
Maximum Discharge Head	98 ft (30m)			98 ft (30m)		
Warranty	2 Year Limited Warranty			2 Year Limited Warranty		

	Standard Kit - with pump, trigger and hose			Elite Kit - with pump, trigger, hose and 4 in 1 deck fitting		
Product Code	WD3517S(B)	WD4517S(B)	WD4527S(B)	WD3517E(B)	WD4517E(B)	WD4527E(B)
Voltage	12V d.c.		24V d.c.	12V d.c.		24V d.c.
Flow Rate	3.5 GPM	4.5 US GPM		3.5 GPM	4.5 GPM	
Pressure Switch Setting	60 psi	70 psi		60 psi	70 psi	
Recommended Automotive Fuse Size	15A		10A	15A		10A
Weight	6.8lbs	7.9lbs		7.7lbs	8.6lbs	
Inlet/Outlet Size	½ inch NPT Male			½ inch NPT Male		
Semi Rigid Pipe-work Connections	½ inch barb connections only			½ inch barb connections only		
Materials in Contact with Liquid	Pump: Stainless steel, EPDM, Santoprene, Fittings: ABS, PVC, PP, PA, PC, POM			Pump: Stainless steel, EPDM, Santoprene, Fittings: ABS, PVC, PP, PA, PC, POM		
Trigger Materials	ABS			ABS		
Hose Materials	Hose: Polyurethane, Brass			Hose: Polyurethane, Brass		
Minimum Wire Size	14 AWG			14 AWG		
Maximum Lift	6 feet			6 feet		
Maximum Discharge Head	98 ft (30m)			98 ft (30m)		
Warranty	2 Year Limited Warranty			2 Year Limited Warranty		


* Included with Standard and Elite Kits only ** note (B) suffix denotes bulk packaging for boat builders- minimum order quantities may apply.

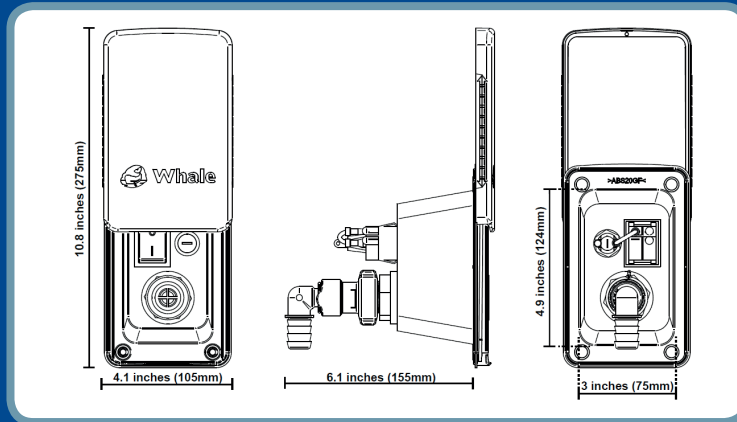

Whale Washdown 4in1
Deck Fitting Elite Kit
dimensions

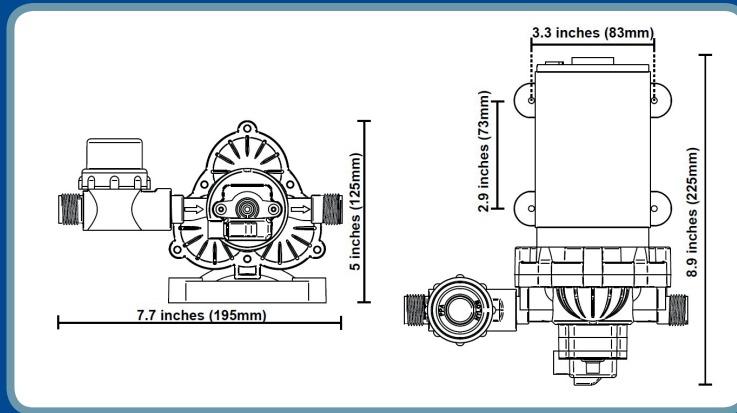

Whale Washdown 3.5
dimensions

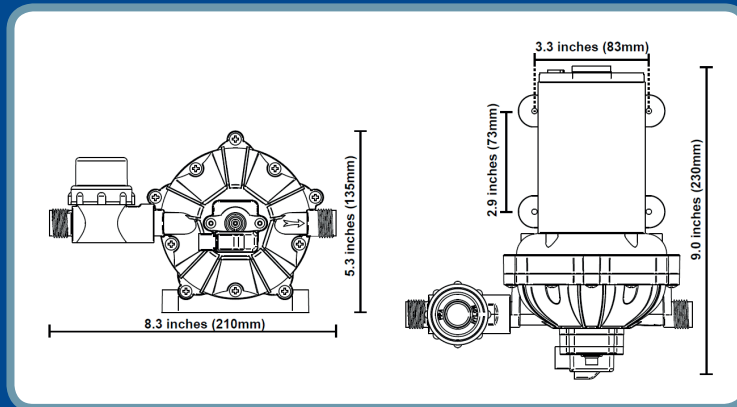

Whale Washdown 4.5
dimensions

