



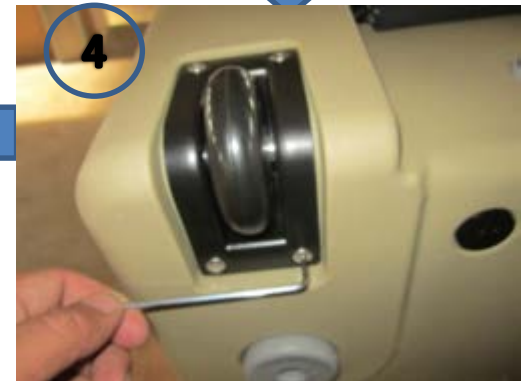

# Wheel Installation



Fixing the wheel to the cooler with M3 socket head wrench and M5\*10 bolts, the twisting force should be above 4N.m but less than 5N.m.