



Hella marine
Vision and Innovation

Product News

Latest additions to the Hella marine range

New!
Compact LED
2NM Anchor Lamps




Size Comparison



NAVILED® 360

Compact LED anchor lamps featuring advanced materials and electronic protection for 'fit and forget' reliability.

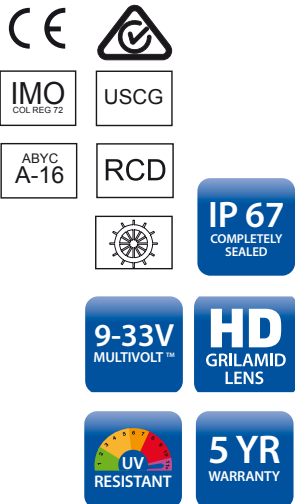

With less than 1W consumption, NaviLED®360 lamps save power onboard.

No maintenance. Ultra long service life
Hella marine LED technology has no filaments to break making NaviLED® lamps extremely shock and vibration proof for reliability and safety in demanding conditions.



Multivolt™ 9-33V DC
Advanced electronics ensure reliable illumination and lamp protection even under severe voltage fluctuations and low battery voltages. Sealed within the base or aluminium pole, the Multivolt™ drive circuitry provides reverse polarity, spike and over-voltage protection for long life and reliable operation.

Safe and highly visible
Hella marine optics deliver 100% correct light output and enhance visibility compared to bulb navigation lamps.

Fully sealed for life. IP 67 Certified
Each NaviLED® lamp is a completely sealed unit, highly UV and corrosion resistant.

Pre-wired with marine cable
Quality twin core marine cable assemblies are used on all lamps ensuring time saving, completely sealed installations.

Internationally certified
Meets the requirements of COLREG, USCG, ABYC A-16, Wheelmark, RCD, Maritime NZ.



Dimensions
a = 56mm / 2.20"
b = 60mm / 2.36"

Housing Material	UV resistant, enhanced impact plastic
Lens Housing Material	Ultra heavy duty Grilamid®
Minimum Visible Distance	2 Nautical Mile
Cable	Pre-wired with twin core marine cable
Operating Voltage	Multivolt™ 9-33V DC
Voltage Protection	Spike protected to +500 volts Reverse polarity protected to -500 volts
Power Consumption	< 1W
Degree of Protection	IP 67 - Completely Sealed
Weight	90g (including cable)
Approvals	IMO Col Reg 72, USCG, ABYC A-16, Wheelmark, RCD, Maritime NZ

Step 1



Step 2



Step 3



LED Multivolt LED Anchor Lamps with compact surface mount base

Lamp Type	Visibility	Black Shroud	White Shroud
Anchor	2 NM	2LT 980 960-001	2LT 980 960-011