


DC Distribution 500

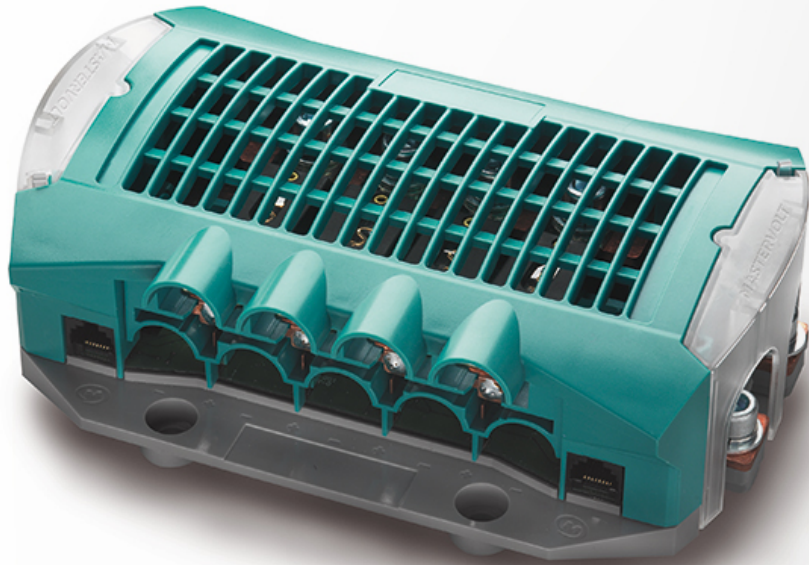

Product code: 77020200

The DC Distribution 500 is the smallest distribution model available. It connects up to four DC devices, such as a battery charger, inverter, alternators and solar panels. With the plug & play cable it can be easily connected to the MasterBus network. The EasyView panel gives all fuses logical names, for instance, referring to the connected equipment, to ensure you receive understandable error notifications (for example: battery charger fuse defect).

The DC Distribution always comes with four ANL fuses: 80, 80, 125 and 160 A, and a spare fuse of 125 A.

Specifications

General specifications

| | |
|----------------------|---|
| MasterBus powering | no |
| Languages on display | ENG, NL, DE, SP, IT, FRA, FIN, SWE, DEN, NOR |
| Battery voltage | 12, 24 or 48 V DC |
| Current | 300 A cont. / 500 A for 5 minutes |
| Standard fuses | 80 A (2x), 160 A and 125 A - ANL type (deviating values can be ordered separately) |
| Spare fuse | 125 A - ANL type |
| Alarms | fuse monitoring |
| Dimensions, hxxxd | 150 x 216 x 65 mm |
| | 5.9 x 8.5 x 2.6 inch |
| Weight | 1.2 kg |
| | 2.6 lb |
| Delivered with | four standard fuses and one spare fuse, hex tool, MasterBus terminator, MasterBus cable, cable protections for DC connections |

Technical specifications

| | |
|-------------------|------|
| Protection degree | IP21 |
|-------------------|------|