


DOUBLE RIGGING INSTRUCTIONS

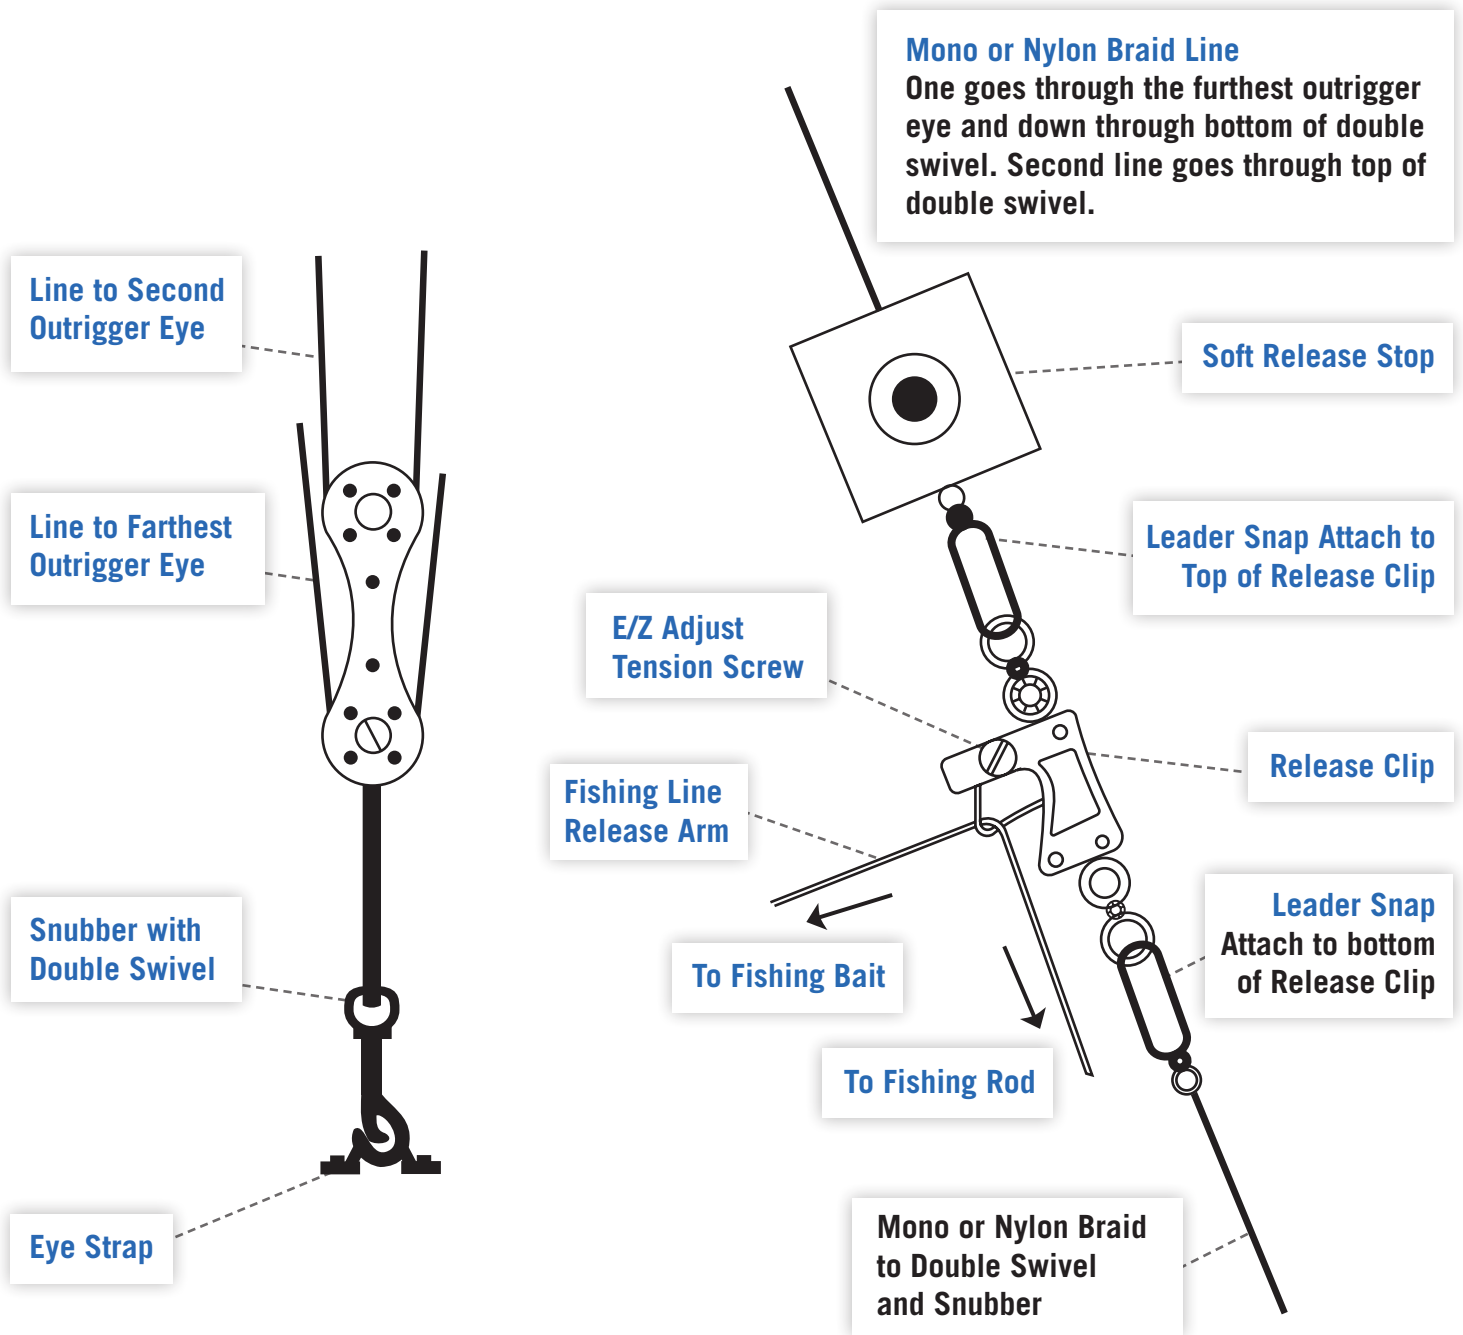

HOW TO RIG YOUR OUTRIGGERS

FOR DOUBLE OR TRIPLE RIGGING, SIMPLY GO TO THE NEXT
LINE GUIDE AND FOLLOW THE SAME STEPS.

STEPS

1. Run your outrigger line or mono up through each of the eye guides.
2. Place cork stop on the line using hole in the center.
3. Attach coast lock swivel to line under cork stop.
4. Attach release clip to coastlock swivel with horizontal arm of release clip attached to the coastlock swivel. If using mono line, run mono through the ring at the top of release clip and use the crimps as supplied to crimp the mono.
5. Using the other end of the line or mono, run line through glass eye or swivel block allowing about 1 foot to complete clip cut line or mono.
6. Attach coastlock swivel to bottom of release clip.
7. Attach line through ring in bottom of release clip, and adjust tension to desired tension. If using mono, crimp mono in place. In nylon, simply tee off the trim the excess line. (Tip: If using nylon line, burn the end of knot.)
8. Attach glass ring bungee to pad eye.

